




Can choose between using:
+5V supply: short R;
4.2V battery supply: insert the diode.

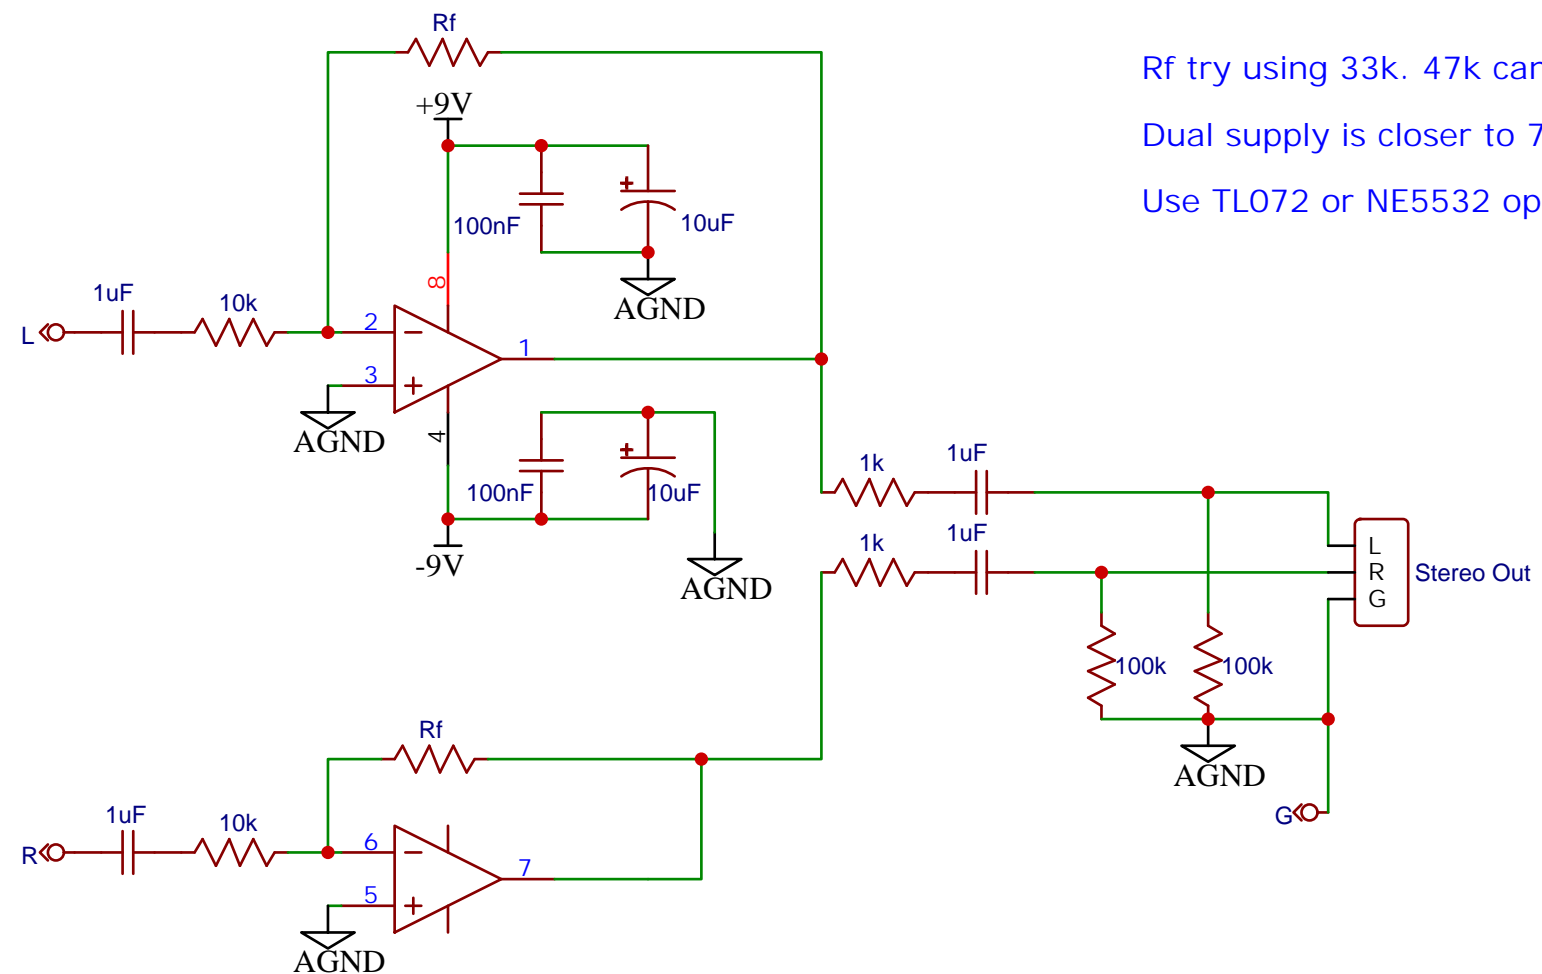

Rf try using 33k. 47k can cause clipping.
Dual supply is closer to 7V.
Use TL072 or NE5532 opamp.

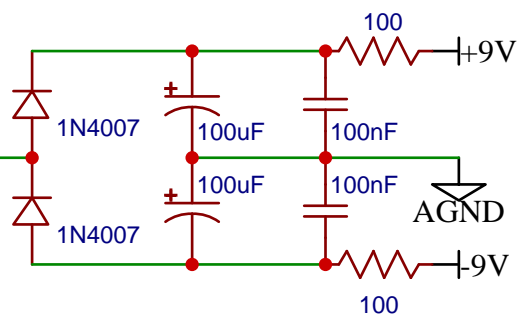

TITLE: Bluetooth Module Supply Board		REV:
	Company: EO&N	Sheet: 1/1
	Date: 2022 Feb	Drawn By: M Caldeira