


SECTION A–A (along the TDR axis)

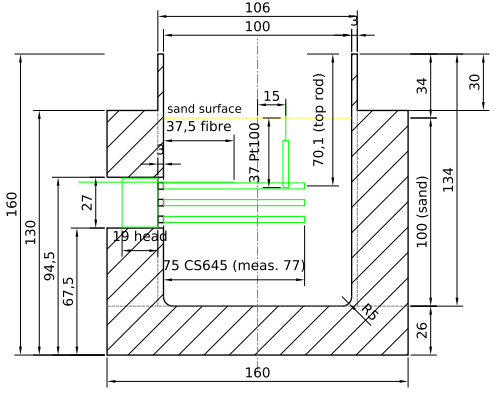

PLAN (from above)

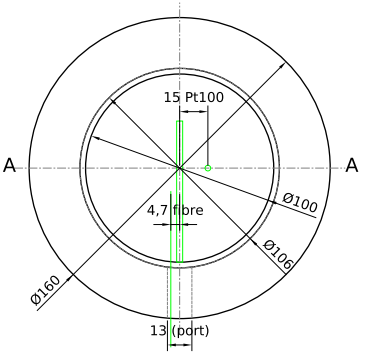

VIEW M (port from outside)



3× ⌀3.5 rods, ⌀1.5 fibre

NOTES

1 General tolerance ±0.2; cavity ⌀100 ±0.1 (ream/sand after printing).
2 Sensor positions (green, layer SENSOR) are for information – CS645 rods centred in the port (pitch 8.9 ≈ 9), fibre tip 37.5 from the wall, Pt100 37 mm vertical, 15 from the axis. Check: Pt100 tip or length?
3 Sand 100 mm (z 26–126), 34 mm free above for the piston / camera.
4 Inside: epoxy coat + PTFE spray + silicone grease.
5 Holes not shown: PV1 cable ⌀3.5 (z 51, 90°), PB1 groove + ⌀3.5 (288°), Pt100 cable ⌀4 (z 125, 0°), optional T1/T2 ⌀2.

Title	E7 – cell A, printed body ⌀160 (Column_one_body_version_1)
Drawing	E7-V04 sheet 1/1 scale 1 : 1.5 (A3) mm
Material	PETG(-CF), body 10 % infill, cavity wall ≈ 5 mm, bottom 100 %
Ref.	M. Vrána 23.06.2026 + sensor sketch; drawn 2026-10-23, DRAFT