

SECTION A–A (along the TDR axis)

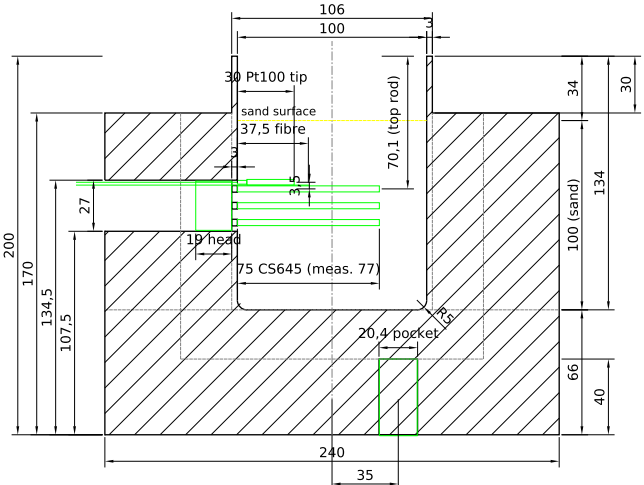


low infill (gyroid 10–15 %): base z 0–40, wall r 80–120

PLAN (from above)

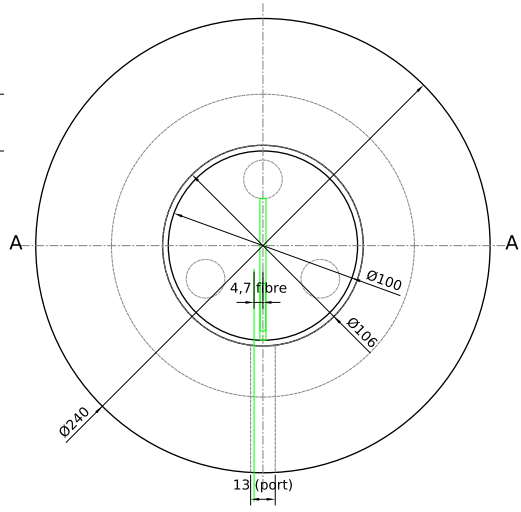

VIEW M (port from outside)



3× ⌀3.5 rods, ⌀3.3 Pt100 (on the top rod), ⌀1.5 fibre

NOTES

1 General tolerance ±0.2; cavity ⌀100 ±0.1 (ream/sand after printing).
2 Sensor positions (green, layer SENSOR) are for information – CS645 rods centred in the port (pitch 8.9 ≈ 9), fibre tip 37.5 from the wall, Pt100 tip 30 mm from the wall, axis +3.5 above the top rod (confirmed).
3 Sand 100 mm (z 66–166), 34 mm free above for the piston / camera. 3 G10 pads ⌀20 × 40 in pockets ⌀20.4 (r 35), 0.5 mm proud.
4 Inside: epoxy coat + PTFE spray + silicone grease.
5 Port 13 × 27 through the whole wall (r 50–120): TDR, Pt100 and fibre cables. Print bed ≥ 250 × 250, Z ≥ 200; ≈ 1.3–1.6 kg, ≈ 40–60 h.

Title	E7 – cell rev. B, printed in ONE piece ⌀240 × 200
Drawing	E7-V04 sheet 1/1 scale 1 : 1.5 (A3) mm
Material	PETG(-CF); base + wall gyroid 10–15 %, floor 100 %
Ref.	core: M. Vrána 23.06.2026; rev. B 2026-10-27, DRAFT