



## CR2450 and power switching + LDO


GATE input voltage is LOW then P-channel MOSFET connected in the circuit will be turned ON letting VBAT flow to LDO

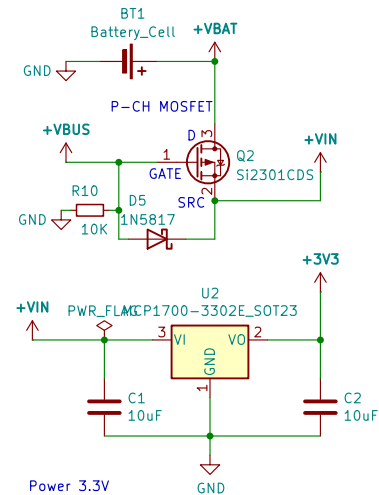


## Ebyte nRF52832 BLE5.0 MCU

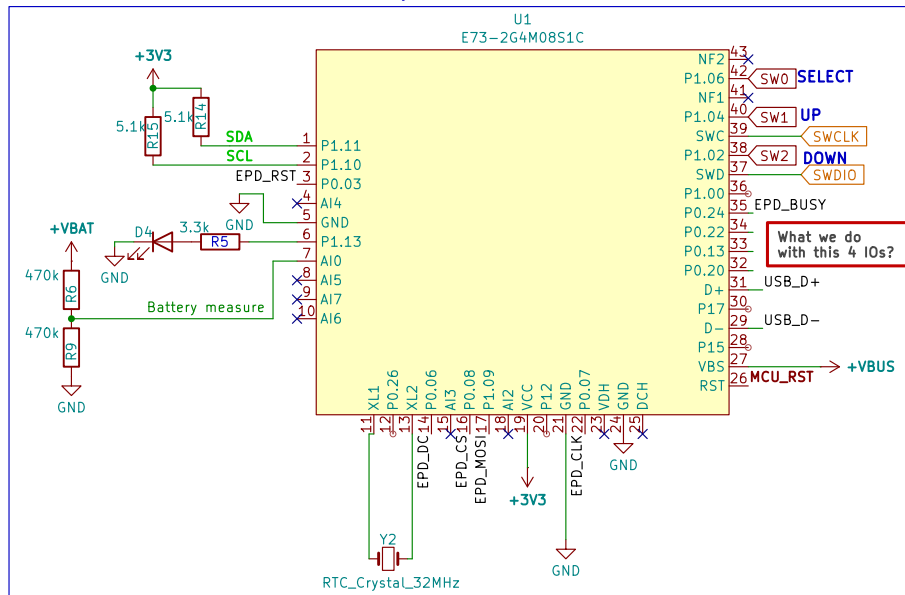


## SWD DEBUGGER

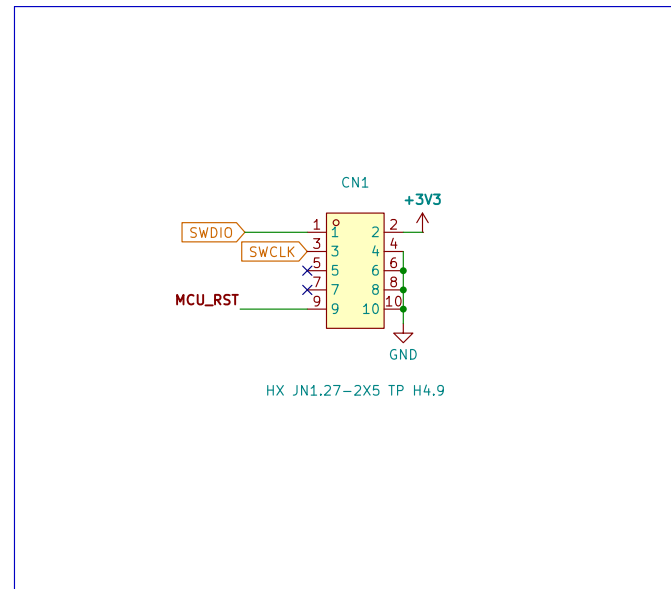


## USB-C JTAG / CDC Serial to MCU

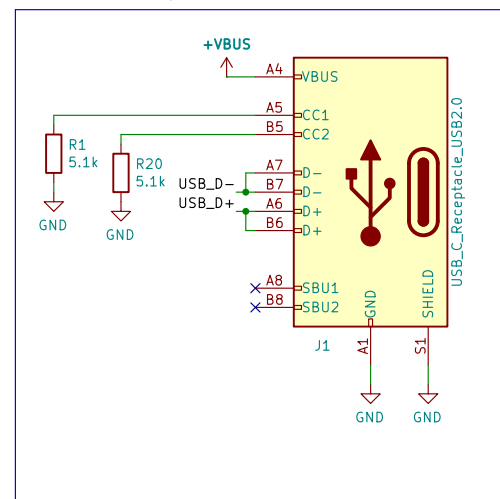

## HV boost circuit

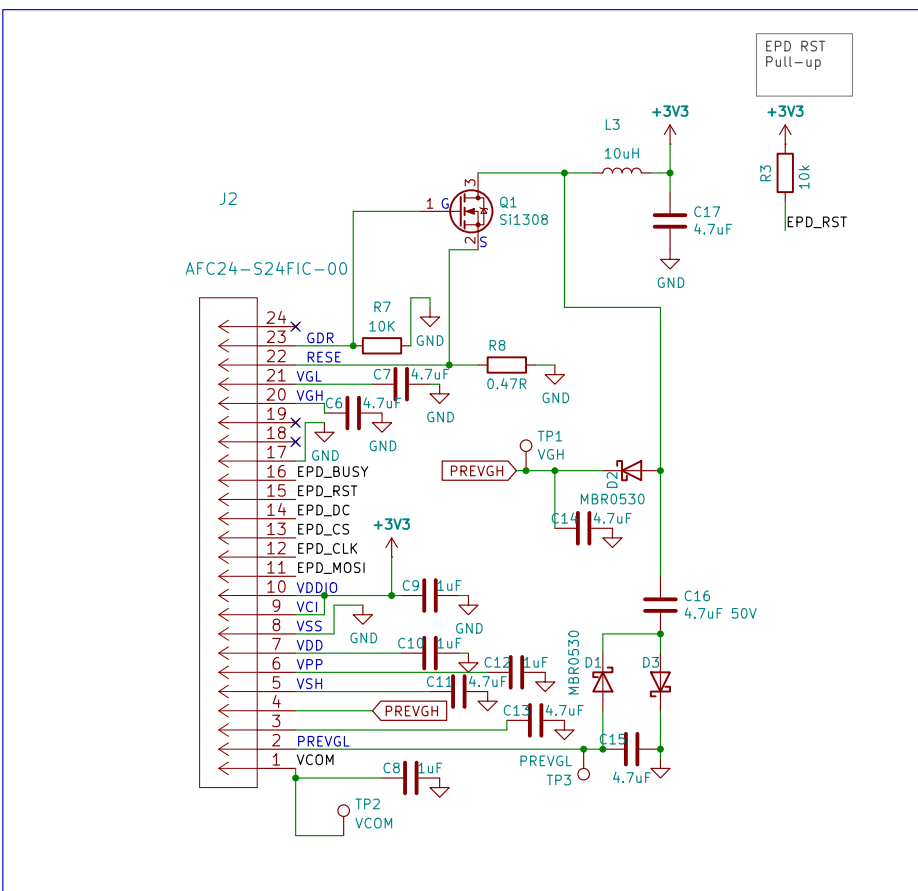

## Reset / Push switches

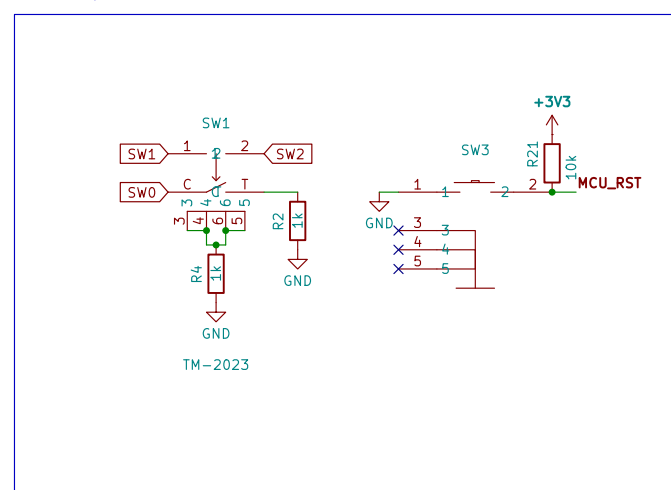

## QWIIC I2C

