




CR2450 and power management

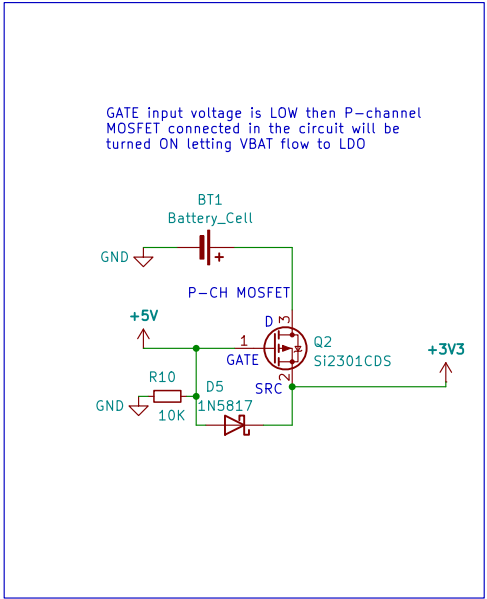

Ebyte nRF52832 BLE5.0 MCU

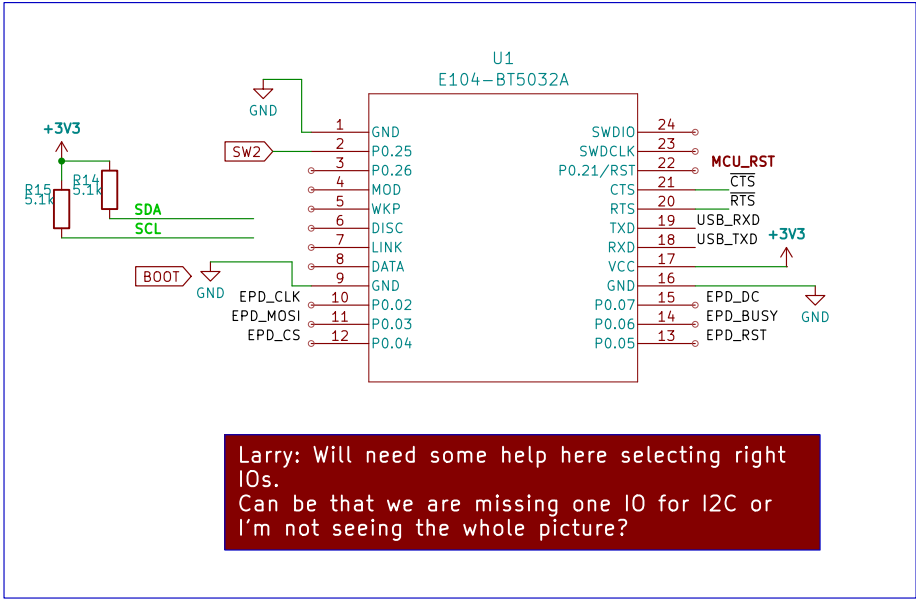


USB to UART

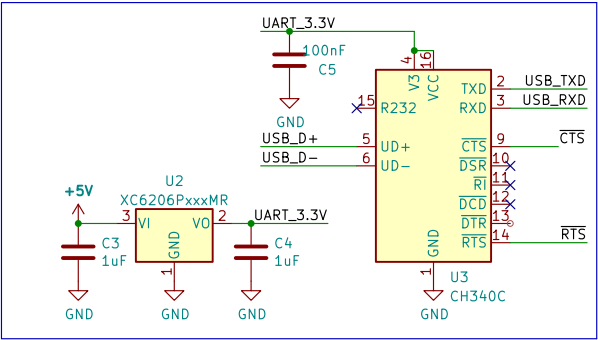


Larry: About hanxia | Product: C42372555 10 pin connector that is quite Bulky...  
It's not possible to add a smaller header with SWDIO /SWDCLK / VCC and GND to flash the bootloader?


USB-C JTAG / CDC Serial to MCU

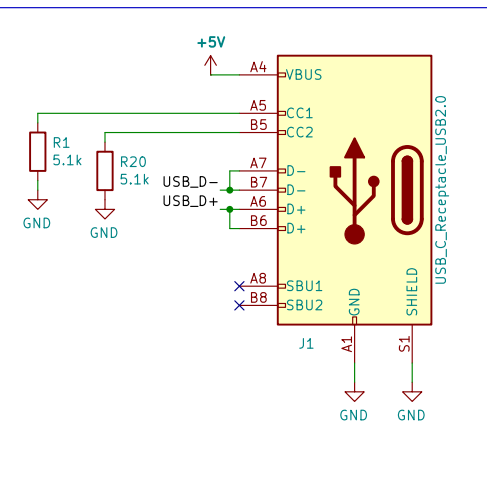


HV boost circuit

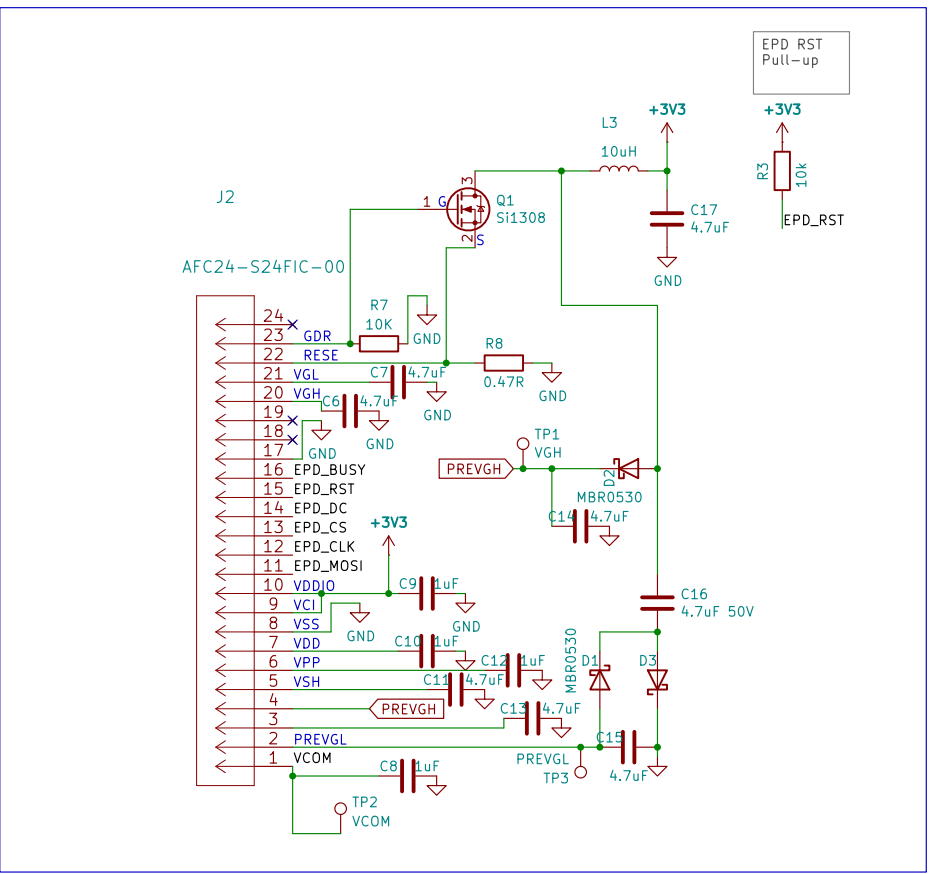

Boot / RST / Push switches

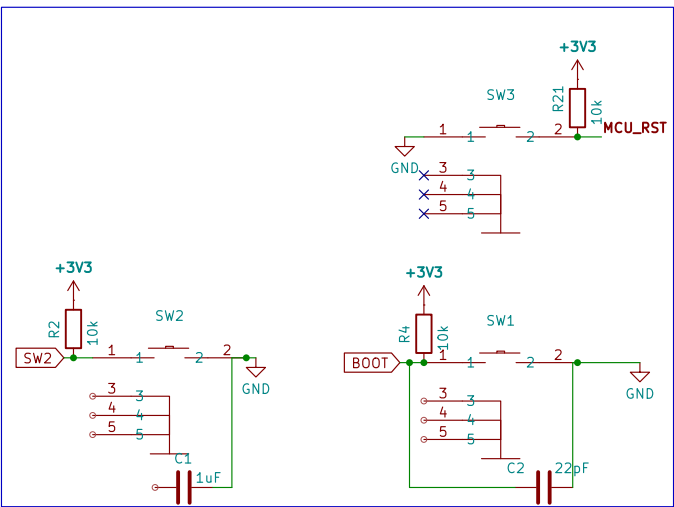

QWIIC I2C

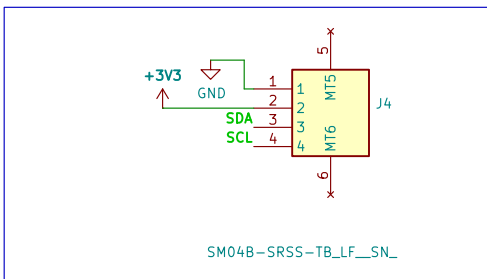

PCF8563T Real time clock via I2C

