





CINREAD IT8951 Power source

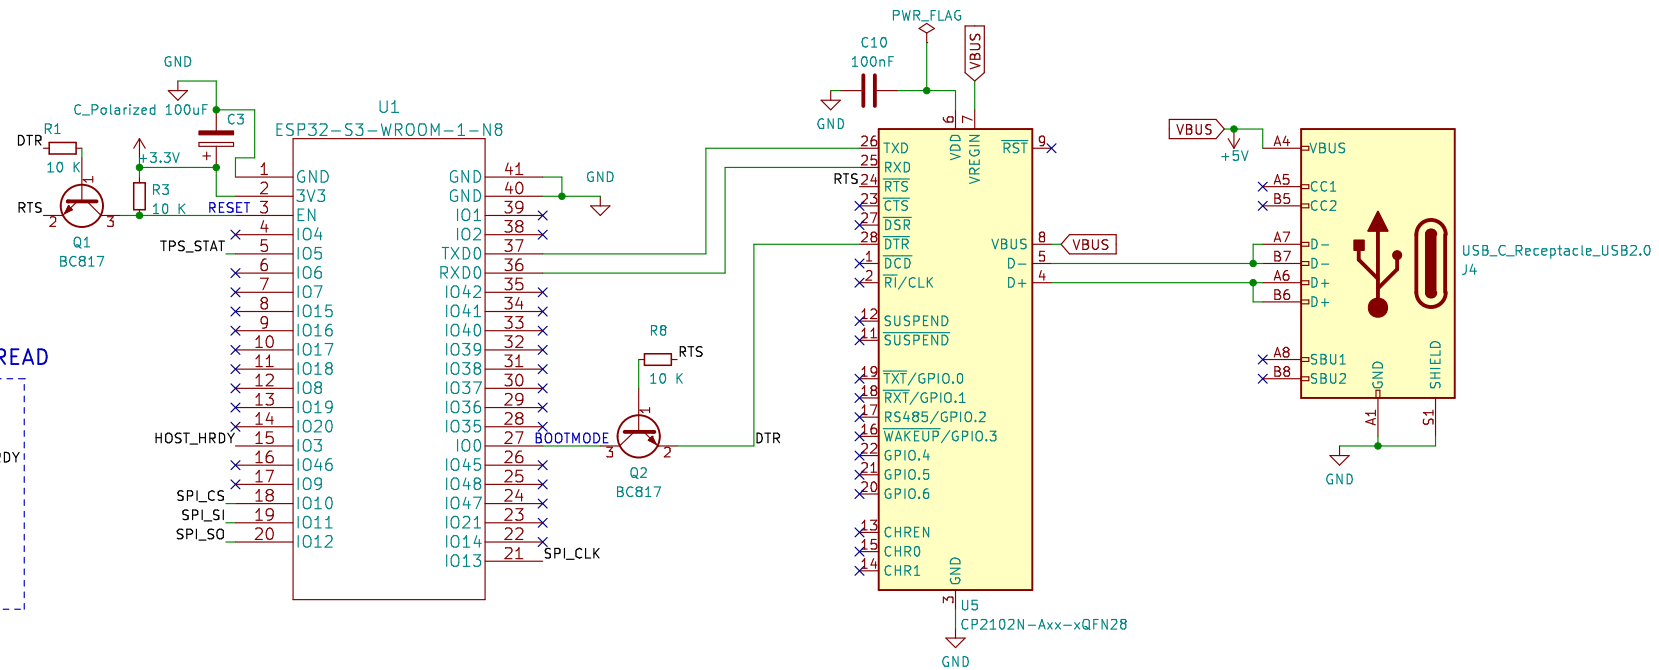


SPI Interface CINREAD



Battery jack



LiPo 3.7V charging circuit + 3.3 V step down

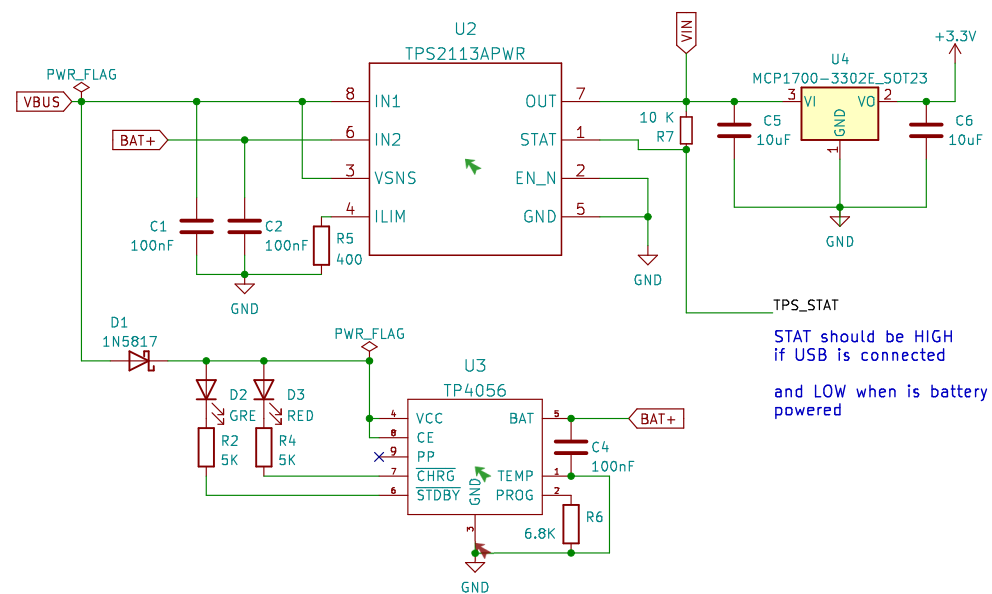

3V to 5V Step UP converter

