




CINREAD IT8951 Power source




SPI Interface CINREAD





I2C interface CINREAD





SPI Interface 2 (external)




I2C interface 2 (BME 280 like)

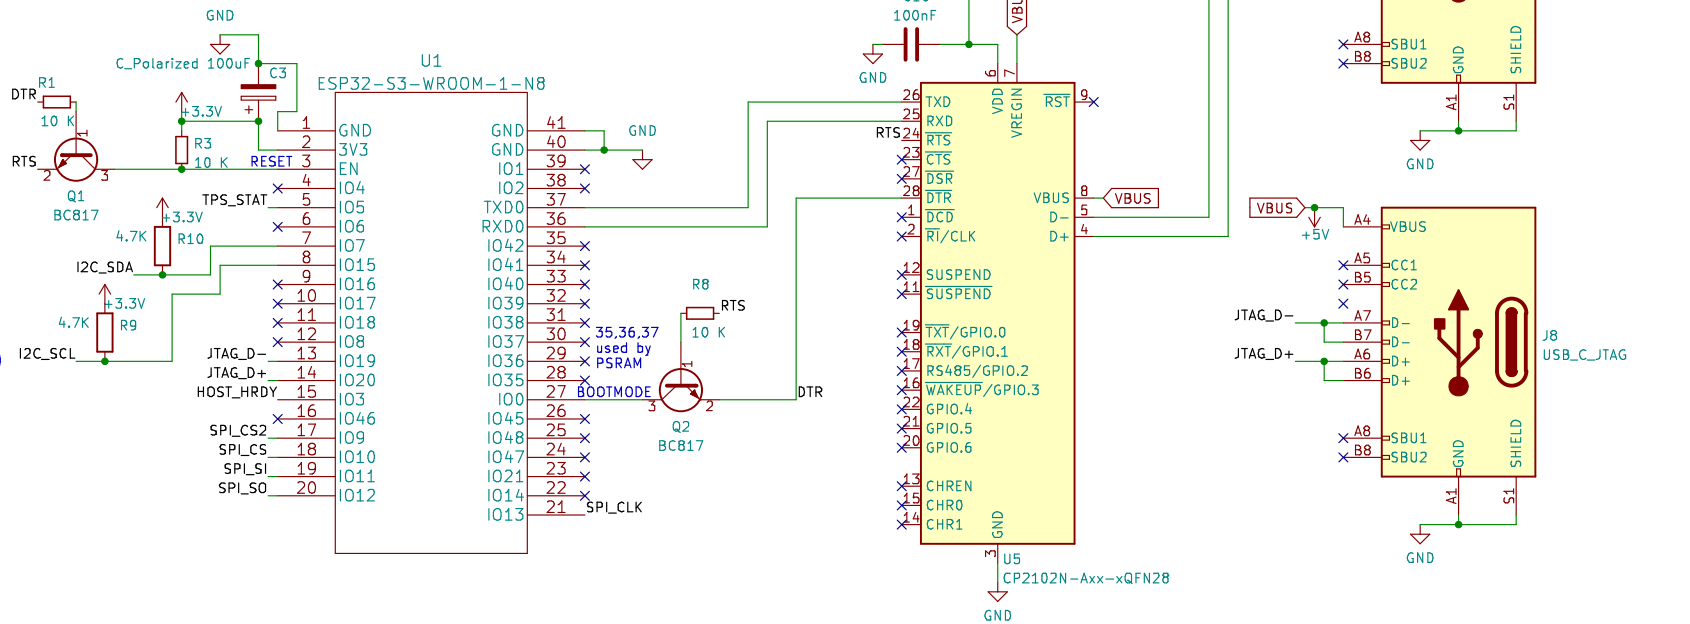

Battery jack

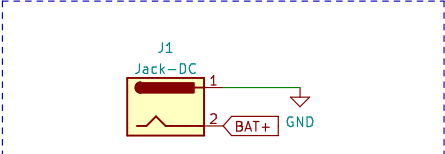

LiPo 3.7V charging circuit + 3.3 V step down

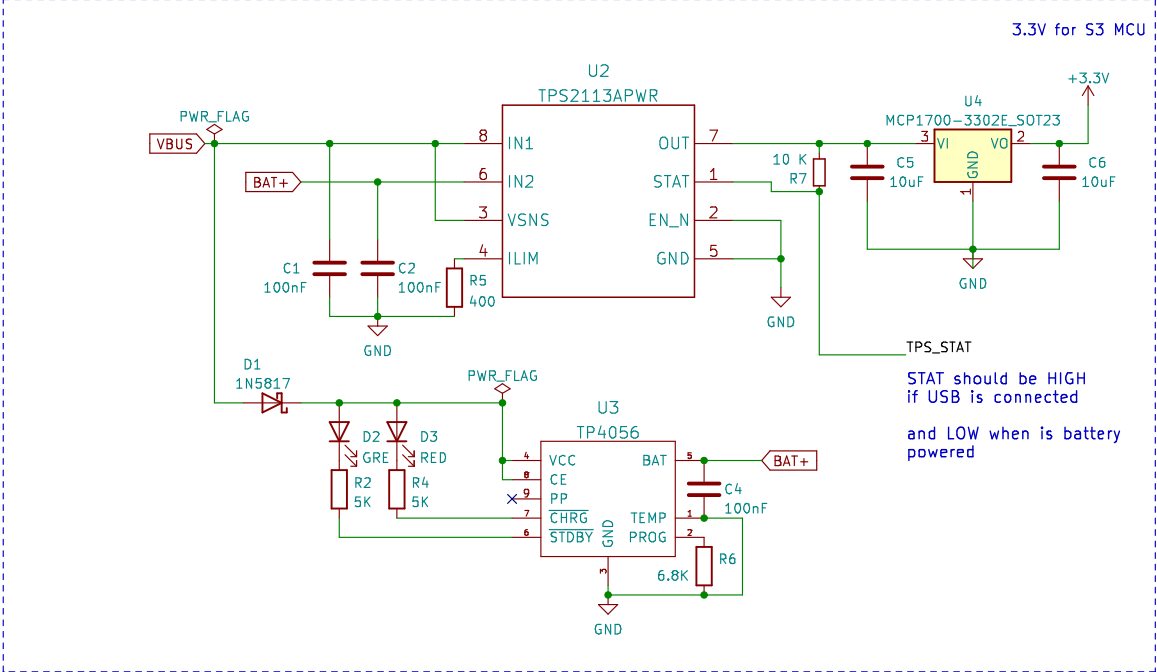

3V to 5V BOOST converter MT3608

