




Web app - Serial Debugger

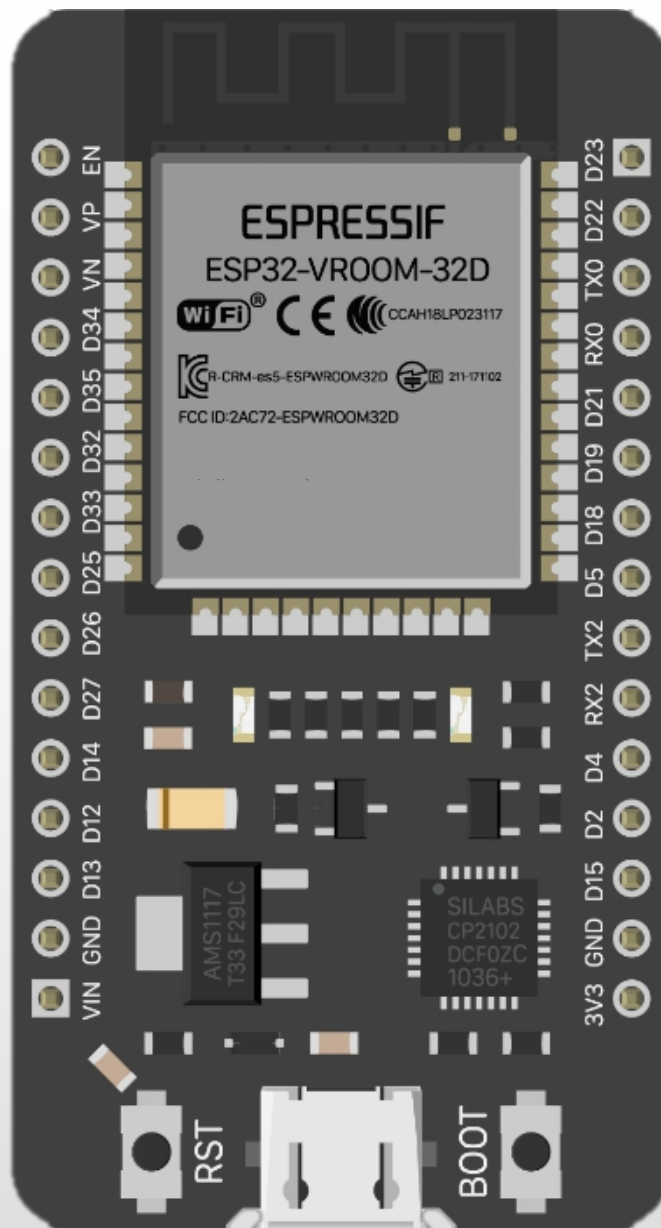


Micro USB

RGB LED - RED

RGB LED - GREEN

RGB LED - BLUE

GND



(LED - optional)

(PIN 17)

Serial TX


Serial RX

(PIN 16)

Serial Port
(to device to debug)



Phone charger to provide power

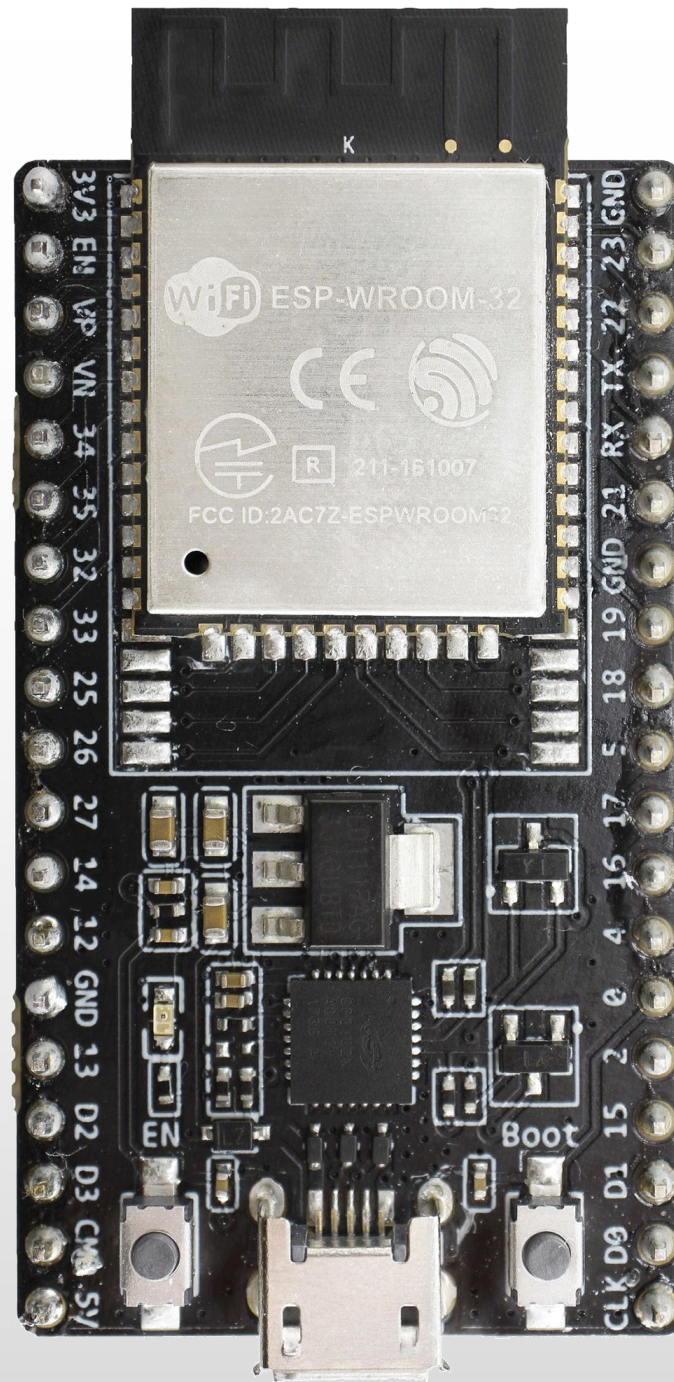

Micro USB


RGB LED - RED

RGB LED - GREEN

RGB LED - BLUE

To STM32 PA10

To STM32 PA9

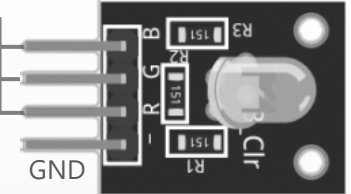

(Optional)