


## Non-Registered Parameter Numbers

Non-registered parameter implementation in the 300 allows all public system parameters to be controlled. The smaller packet size of these messages, as compared to equivalent SysEx messages, make non-registered parameters a more efficient means of system data transmission.

### Transmission Format

When Auto Mode is set to NREG-PARAM (in Control Mode), changing any public system parameter will transmit a running status MIDI controller message formatted as shown below. Note that Lexicon uses:

- nrpn MSB messages (63) to send 300 Domain ID
- nrpn LSM messages (62) to send 300 parameter numbers
- data entry MSB messages (06) to send coarse parameter values
- data entry LSB messages (26) to send fine parameter values

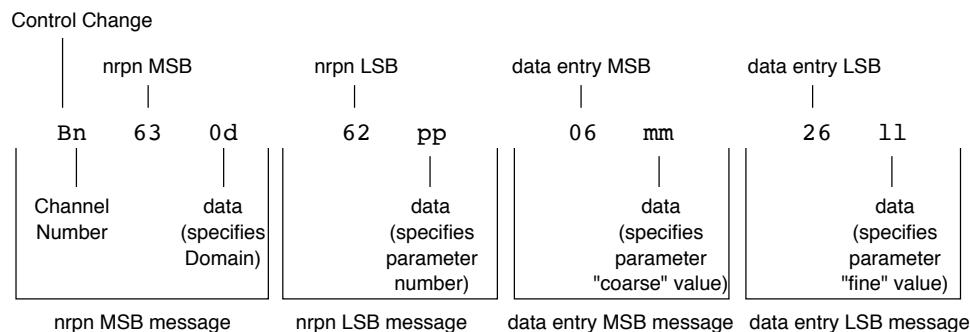

**Reception Format** Non-Register parameter data will be recognized in both a running status format and as a burst of individual controller messages.

### Domain IDs

Number	Description
0	Utility
1	Run
2	Setup
3	Effect A
4	Effect B
5	Modulation A
6	Modulation B