


Main products

BTB connector

FPC/FFC CONNECTOR

SMALL BTB Connector

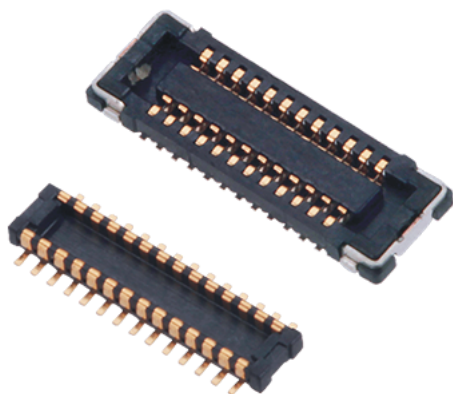

OK-10F/GMxxx-04

SPECIFICATIONS:

(1) MATERIAL:

1-1. HOUSING: THERMOPLASTIC LCP BLACK (UL94V-0)

1-2. CONTACTS: COPPER ALLOY.

(2) CONTACT PLATING SPECIFICATIONS:

CONTACT AREA: GOLD、SMT LRAD : GOLD、UNDER PLATING: NI

(3) CHARACTERISTICS:

3-1. RATED VOLTAGE: 60V AC/DC

3-2. RATED CURRENT: 0.3A/CONTACT


3-3. INSULATION RESISTANCE: MIN 1000MΩ(INITIAL)

3-4. WITHSTAND VOLTAGE: 150V AC FOR 1 MIN

3-5. CONTACT RESISTANCE: MAX 90MΩ

PRODUCT CHARACTERISTICS:

Small Size



Double Touch



Blind mating Design



Unique Terminal Design



APPLICATION:

Applicable to mobile phones, cameras, Bluetooth headset, Tablet Computer, walkie-talkies and other communicat



Mobile phone



Cameras



Bluetooth headset




Tablet Computer




walkie-

OK-10F024-04

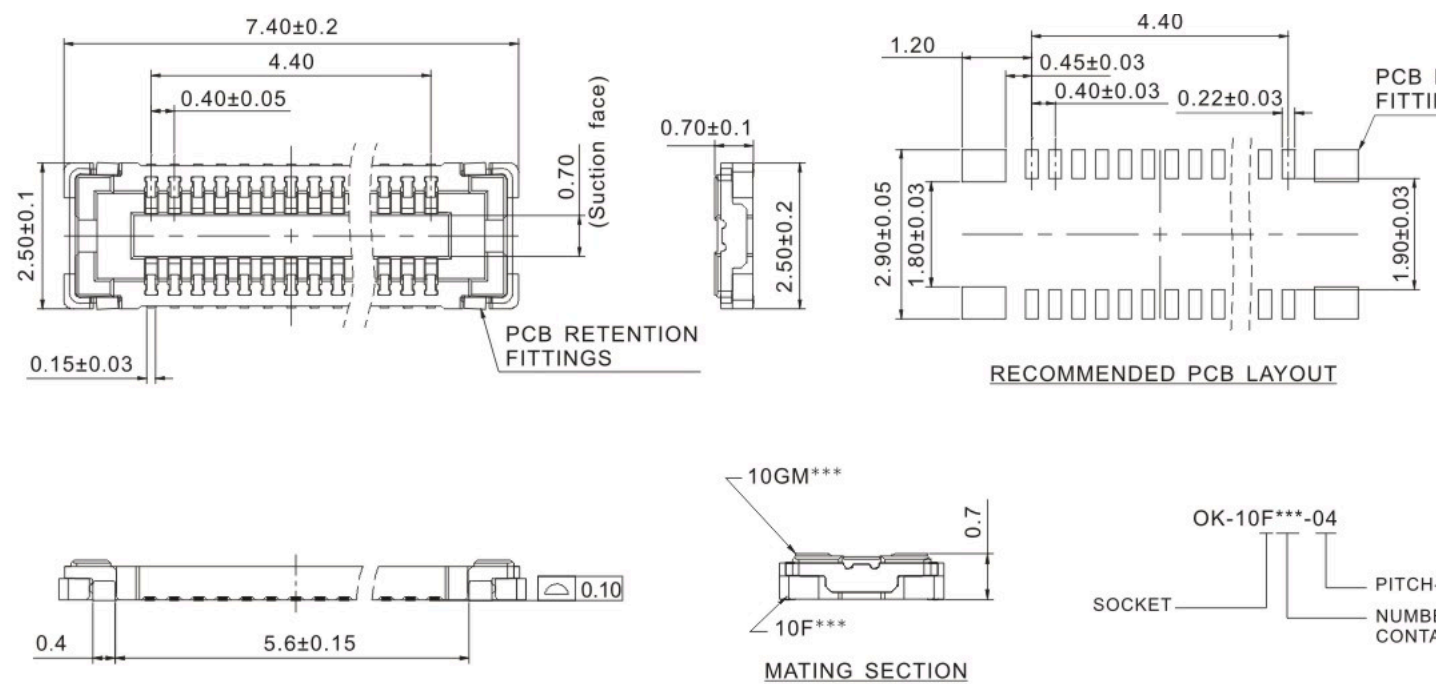

OK-10GM024-04

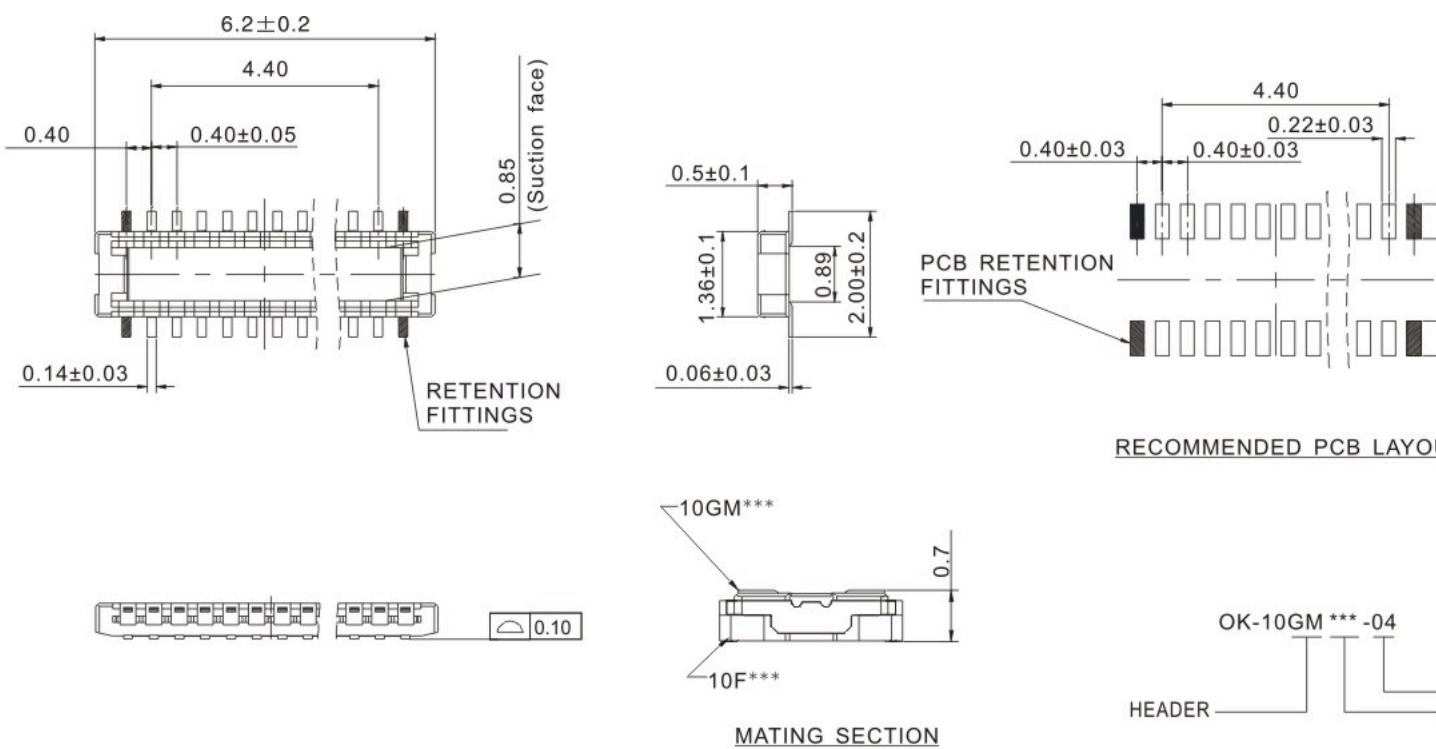



HOME

ABOUT

STRENGTH

PRODUCT

APPLICATION

NEWS

CONTACT

OCN TECHNOLOGY

Company profile	Product development	Main products	Smart phone	Company news	Address
Enterprise vision	Production strength	Product mall	Car Electronics	Industry news	Recruitment
Development history			Tablet		Information
Organizational			Drone		
Management team			Smart wear		
Corporate culture			e-cigarette		
			Headset		
			Digital camera		
			amcorder		
			Laptop		
			Game console		
			Security equipment		
			Walkie talkie		