

**Road**

- P2 ADROITE
- P3 ADROITE (disc)
- P4 AIRY PRO
- P5 AIRY SL
- P6 AIRY-D
- P7 ALICANTE
- P8 ALLER
- P9 ALLER-D
- P10 ANLACE
- P11 AVANCE (direct mount)
- P12 AVANCE (flat mount disc)
- P13 AXION SL
- P14 FOX II
- P15 GRAVEL
- P16 GRAVEL ALU
- P17 ASCETIC

MTB

- P18 PICCOLO 650B
- P19 PICCOLO 650B SL
- P20 PICCOLO 29ER
- P21 PICCOLO 29ER SL
- P22 PYRENEES 650B
- P23 PYRENEES 650B AM PRO 150
- P24 PYRENEES 29ER
- P25 PYRENEES 29ER AM PRO 150
- P26 PHAETON 650B
- P27 PHAETON 650B PLUS
- P28 PHAETON 29ER
- P29 PHANTOM
- P30 ARTIC
- P31 TALLYHO

TRACK

- P32 STINGER

TT

- P33 SPRINT-2

- P34 TRIDENT

CX

- P35 CCX PRO

- P36 CCX PRO D

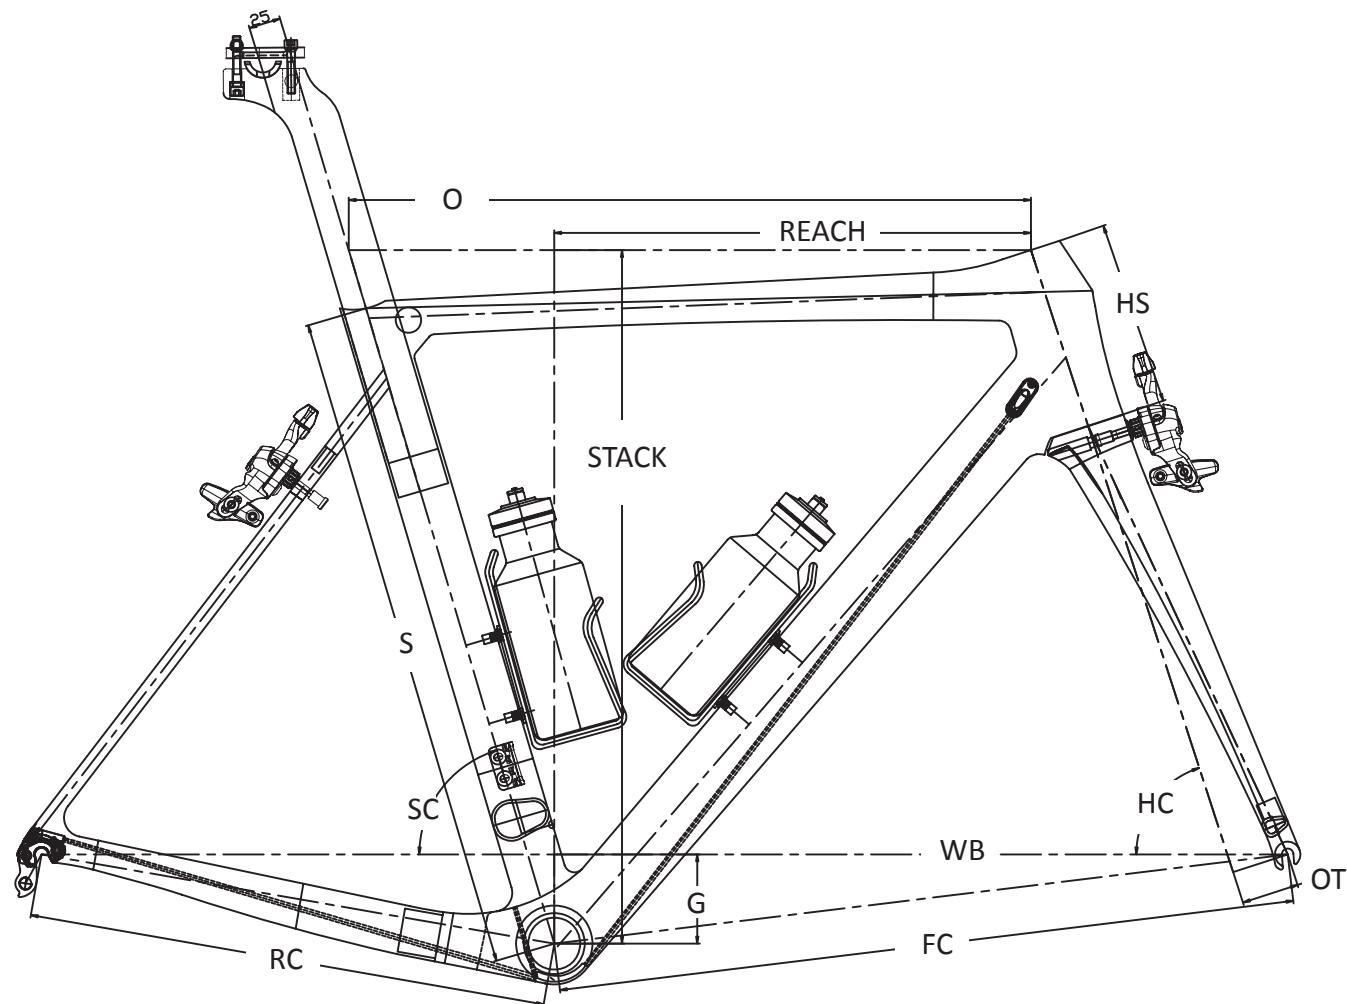
E-BIKE

- P37 PINNACLE 29ER

- P38 PINNACLE URBAN

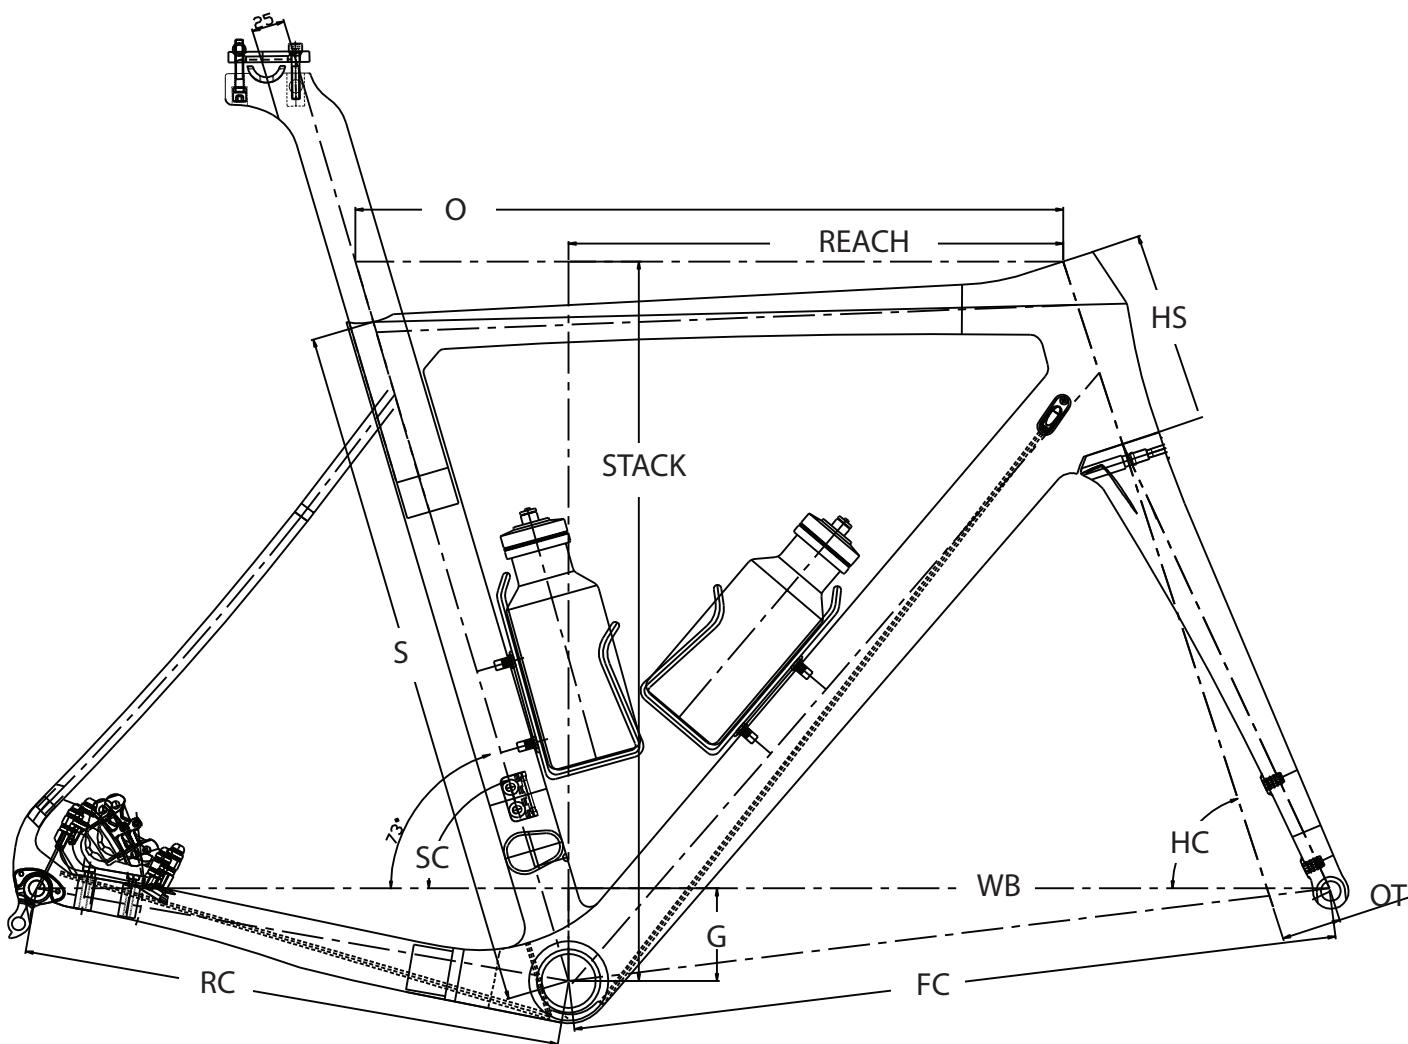
LEGEDNS

EDGE DESIGN

[Back to Index](#)

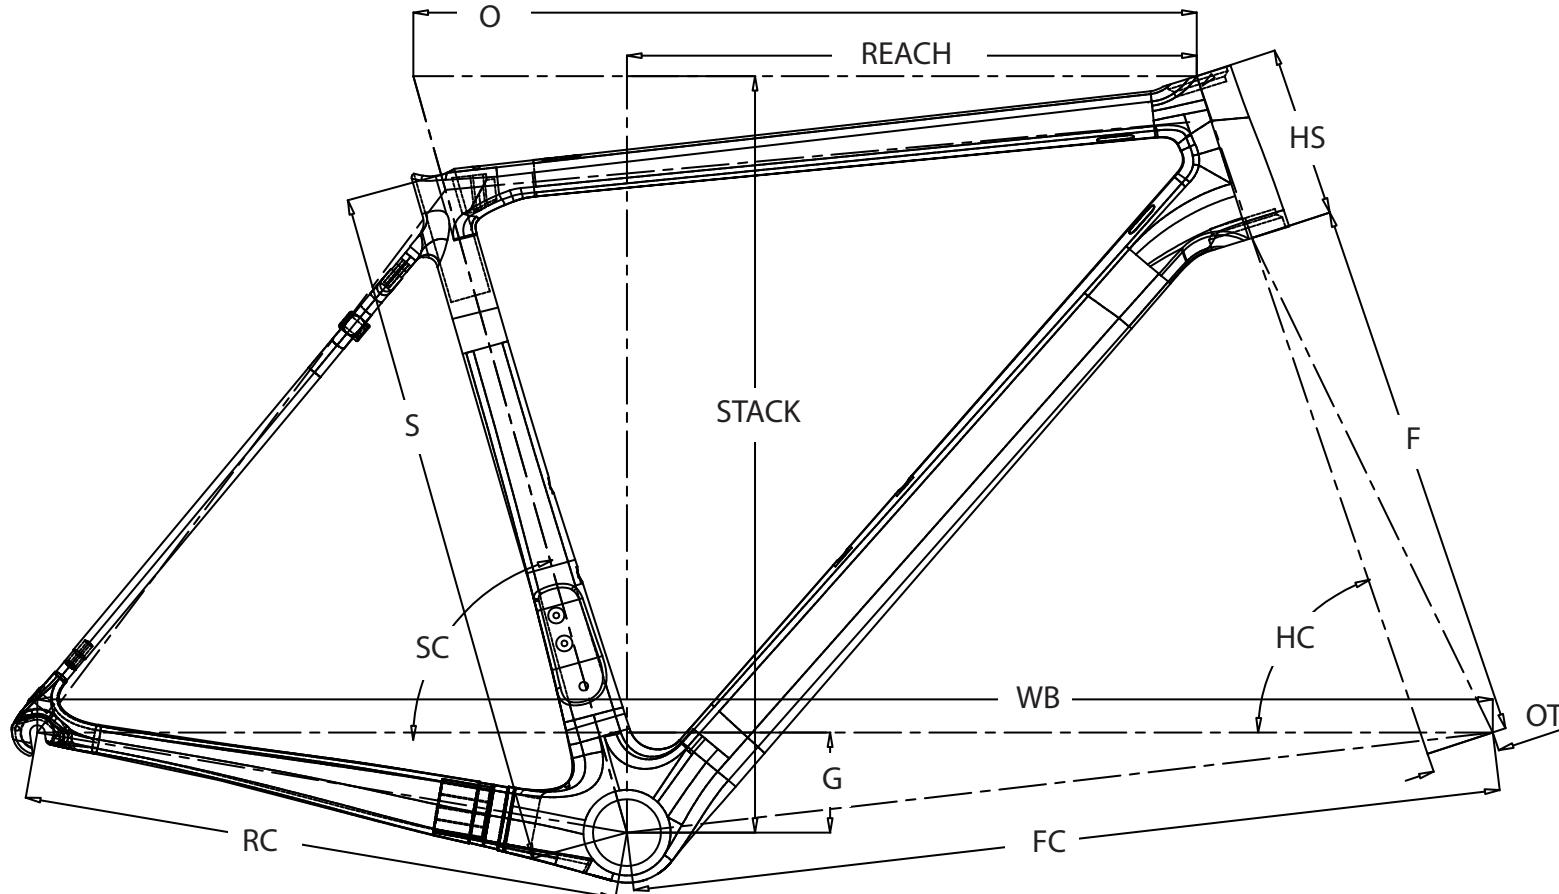
ADROITE (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	OT	WB	FC	RC	G	Reach	Stack
480	480	74.8°	515	125	71.3°	45	976.4	578.4	408	69	373.6	521.5
500	500	74.3°	525	135	72°	45	975.7	577.7	408	69	375.4	533.5
520	520	73.5°	535	145	72°	45	977.3	579.4	408	70	373.9	544
540	540	73°	550	160	72.3°	45	984.5	586.6	408	70	379	559.3
560	560	72.5°	560	170	72.3°	45	989.2	591.2	408	70	380.6	568.9
580	580	72.5°	570	190	73°	45	992.1	594.1	408	70	383.8	590.5



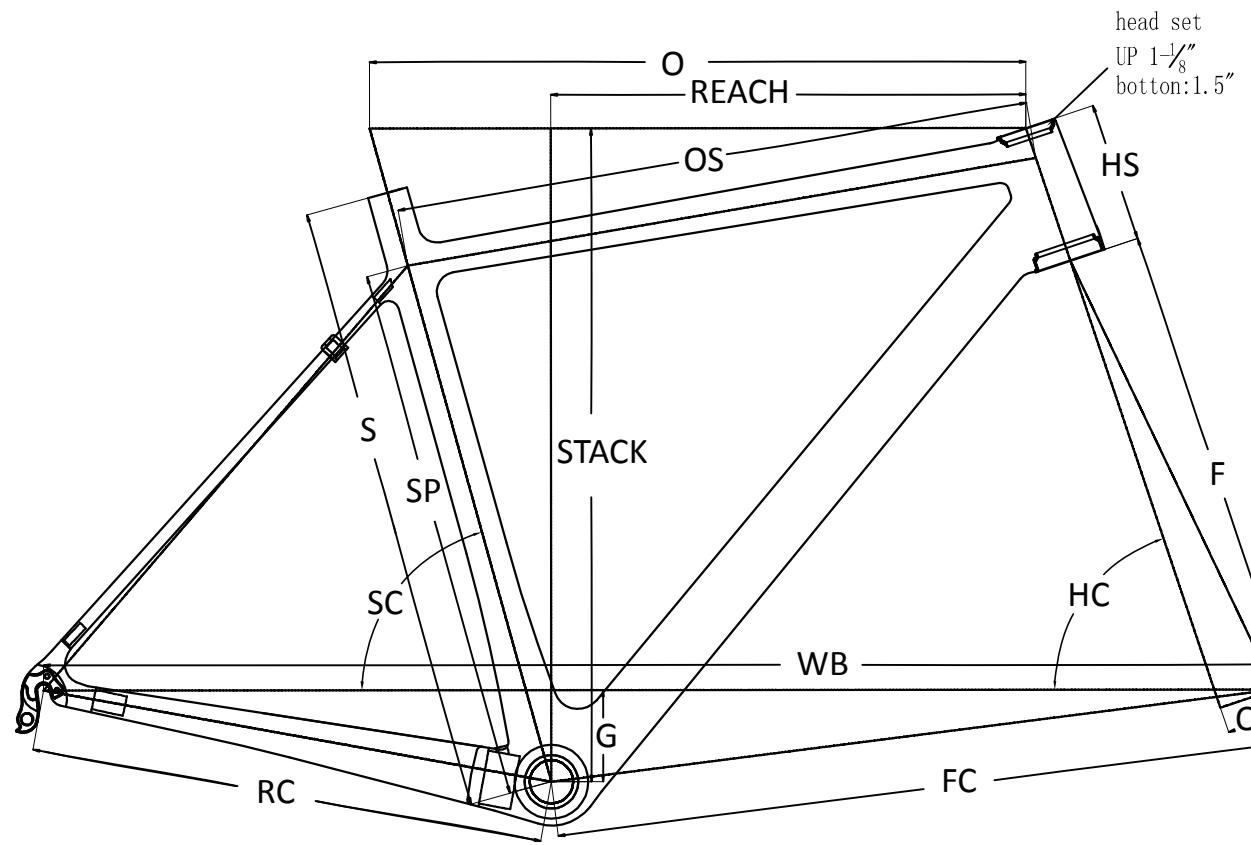
ADROITE-Disc (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	OT	WB	FC	RC	G	Reach	Stack
480	480	74.8°	515	125	71.3°	45	976.4	578.4	408	69	373.6	521.5
500	500	74.3°	525	135	72°	45	975.7	577.7	408	69	375.4	533.5
520	520	73.5°	535	145	72°	45	977.3	579.4	408	70	373.9	544
540	540	73°	550	160	72.3°	45	984.5	586.6	408	70	379	559.3
560	560	72.5°	560	170	72.3°	45	989.2	591.2	408	70	380.6	568.9
580	580	72.5°	570	190	73°	45	992.1	594.1	408	70	383.8	590.5

[Back to Index](#)

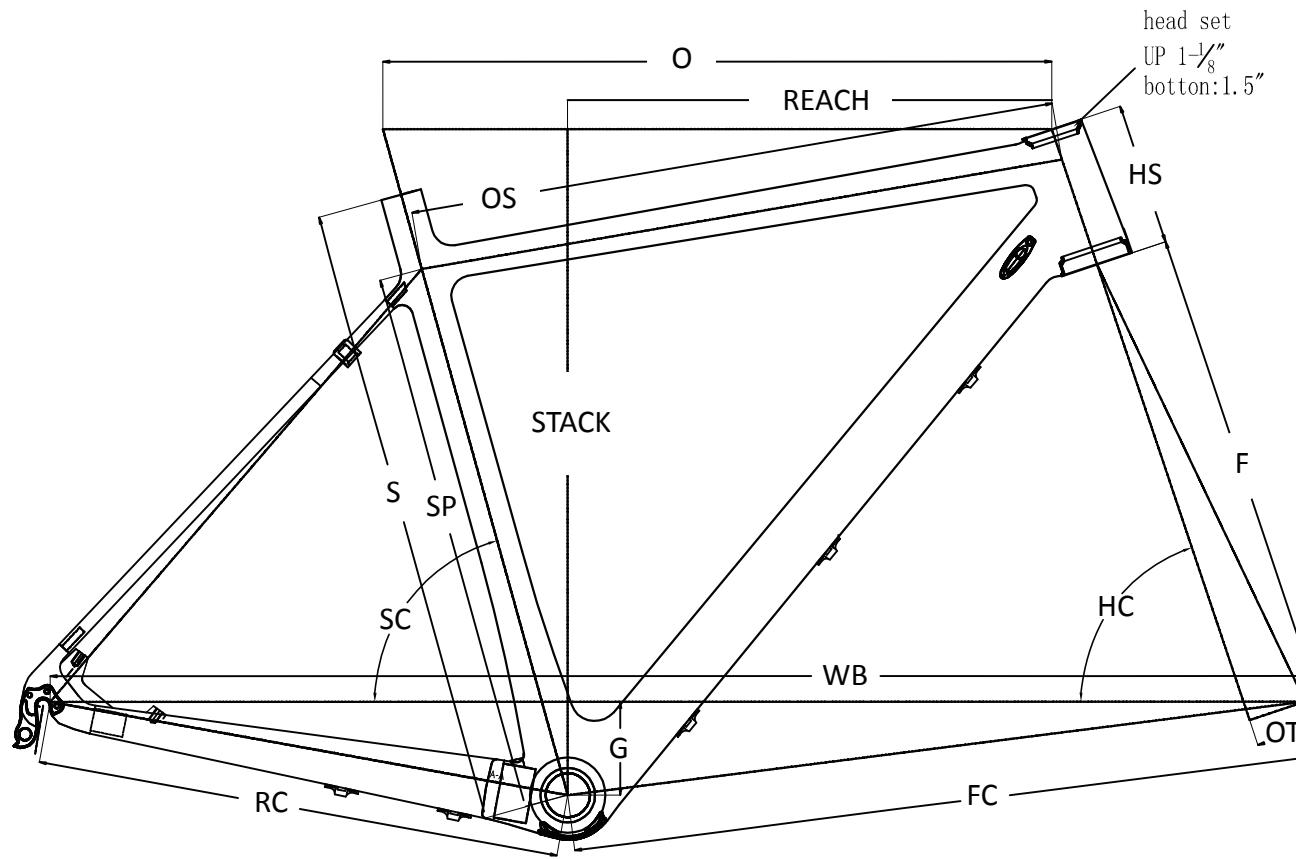
AIRY PRO (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	450	75°	505	100	71°	370	45	964.2	570.2	410	72	371	501
480	480	74.5°	515	110	71.5°	370	45	966.3	572.3	410	72	373	513
500	500	74.5°	525	115	72°	370	45	972.2	578.1	410	72	381	519
520	520	74°	535	120	72.5°	370	45	974.6	579.5	410	69	384	522
540	540	73.5°	545	140	73°	370	45	975.2	580.2	410	69	385	543
560	560	73.5°	559.6	155	73°	370	45	990	594.9	410	69	395	558
580	580	73°	575	175	73.5°	370	45	995.1	600	410	69	398	579

[Back to Index](#)

AIRY SL (Length: mm/ Angle: °)

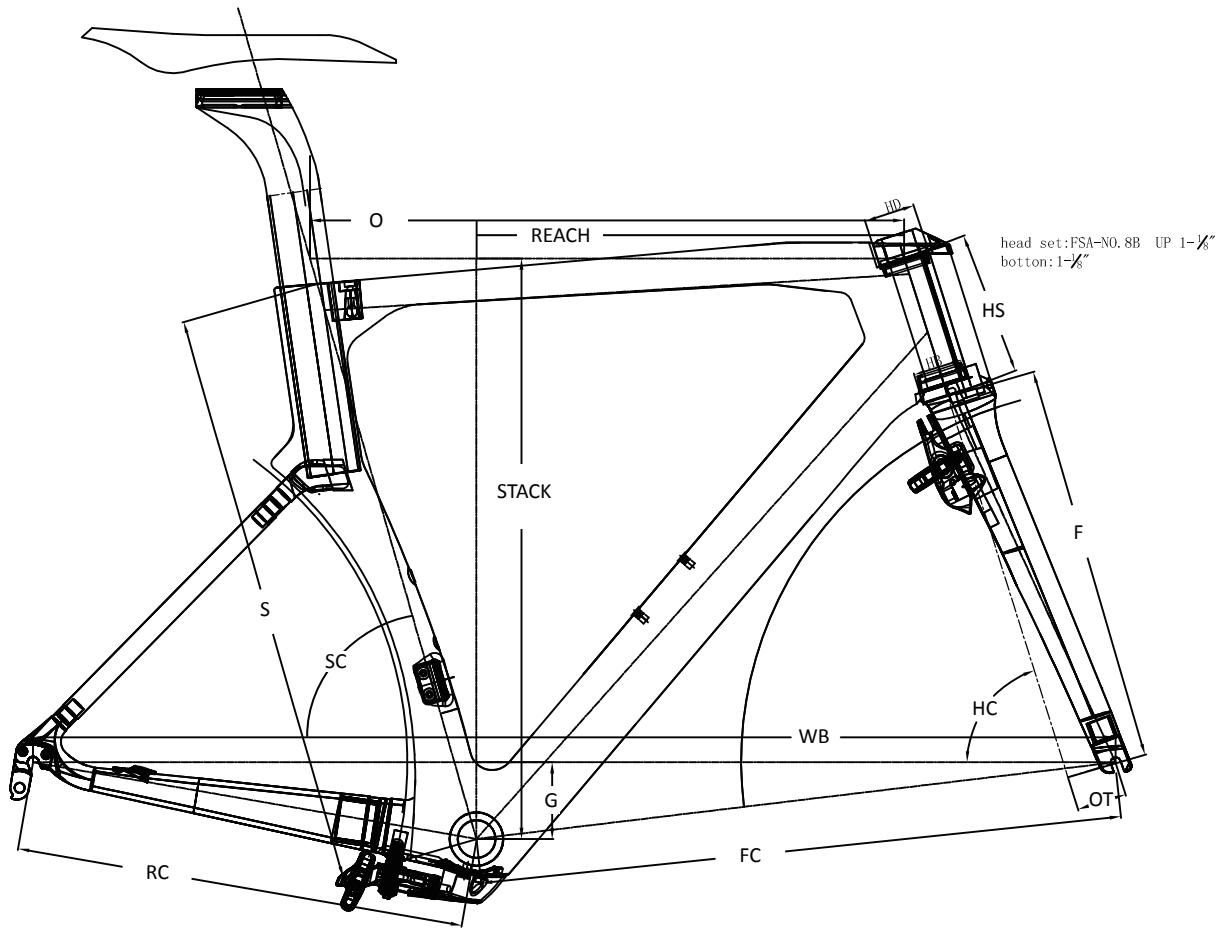
SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	450	400	75°	505	491	100	71°	370	45	964.2	570.2	408	72	371	501
480	480	420.6	74.5°	515	500.1	110	71.5°	370	45	996.3	572.3	408	72	373	513
500	500	440.6	74.5°	525	511.5	115	72°	370	45	972.2	578.1	408	72	381	519.5
520	520	460.6	74°	535	522.9	120	72.5°	370	45	974.6	579.5	408	69	384	522.5
540	540	480.6	73.5°	545	531.7	140	73°	370	45	975.2	580.2	408	69	385	543
560	560	500.6	73.5°	559.6	547.2	155	73°	370	45	990	594.9	408	69	394.5	557.5
580	580	520.6	73°	575	560.9	175	73.5°	370	45	995.1	600	410	69	398	579
600	600	540.6	72.5°	590	574.7	195	73.5°	370	45	1004.2	609	410	69	401.5	598



AIRY- D (Length: mm/ Angle: °)

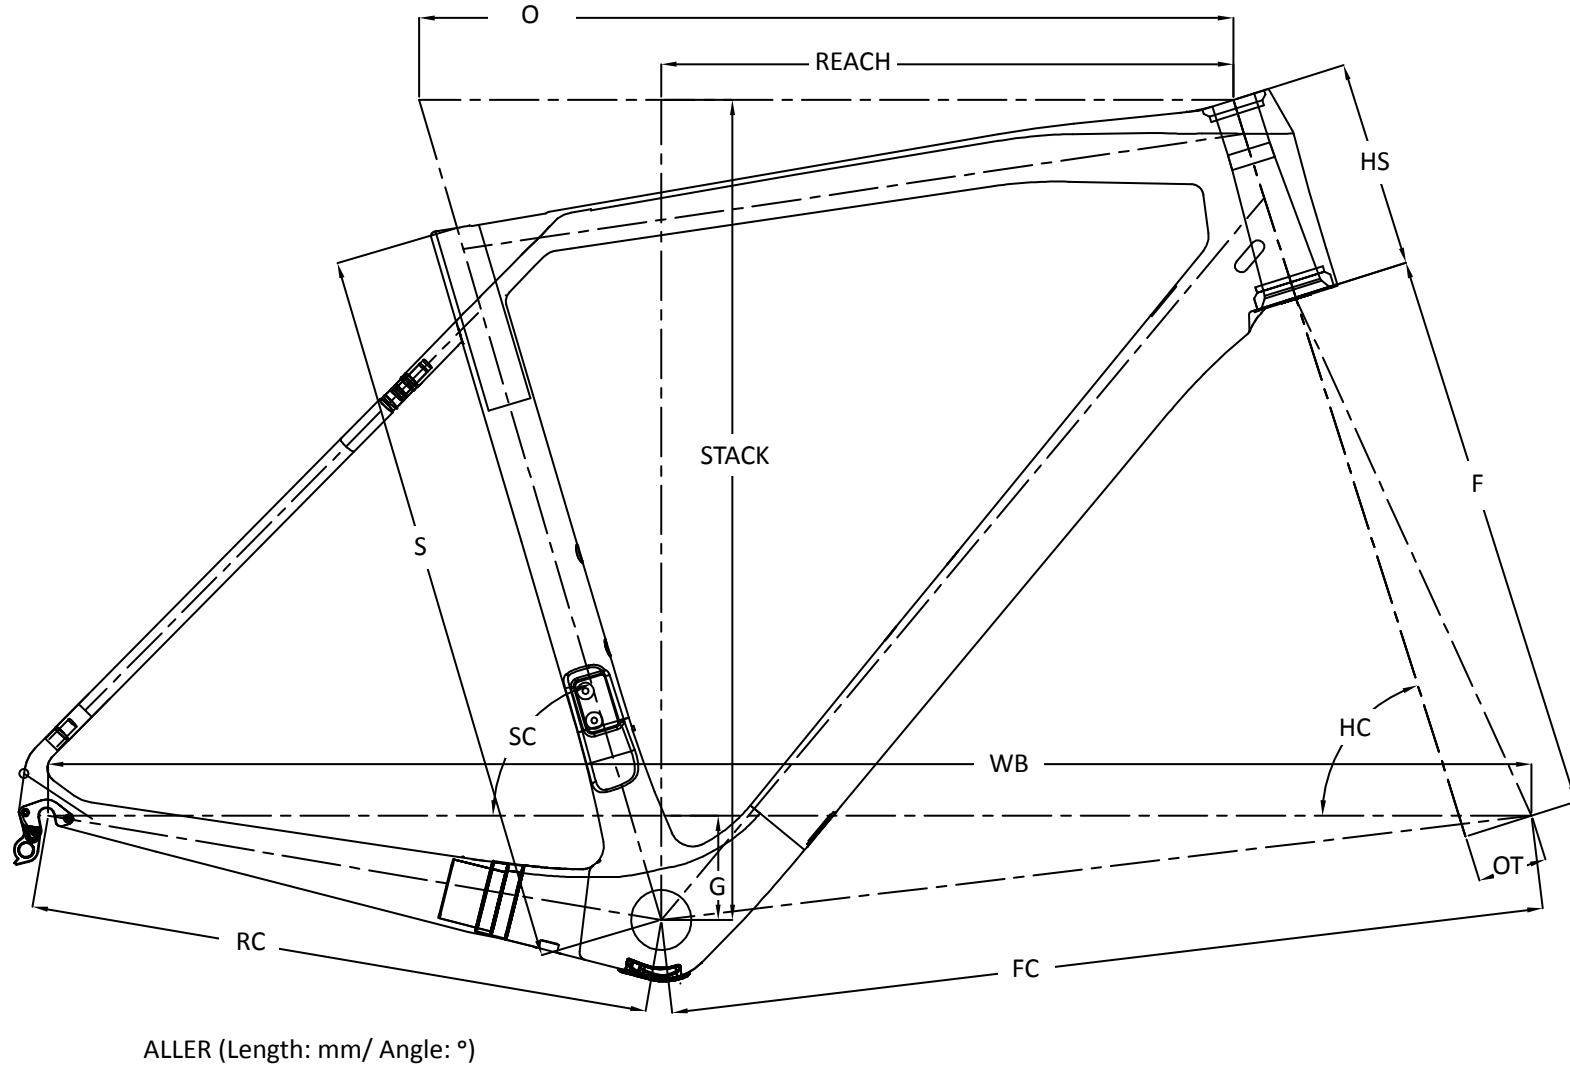
OLD 135mm/ ROTOR 140mm

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	450	400	75°	505	491	95.8	71°	368	45	974.4	570.2	415	72	370.9	500.7
480	480	420.6	74.5°	515	500.1	105.8	71°	368	45	976.4	572.3	415	72	372.8	512.9
500	500	440.6	74.5°	525	511.5	110.8	72°	368	45	981.4	578.1	415	72	381	519.4
520	520	460.6	74°	535	522.9	115.8	72.5°	368	45	974.6	579.5	415	69	384.1	522.5
540	540	480.6	73.5°	545	531.7	135.8	73°	368	45	985.4	580.2	415	69	385.2	543.2
560	560	500.6	73.5°	559.6	547.2	150.8	73°	368	45	1000.1	594.9	415	69	394.5	557.6
580	580	520.6	73°	575	560.9	170.8	73.5°	368	45	1005.2	600	415	69	398.1	578.8
600	600	540.6	72.5°	590	574.7	190.8	73.5°	368	45	1014.3	609	415	69	401.5	598

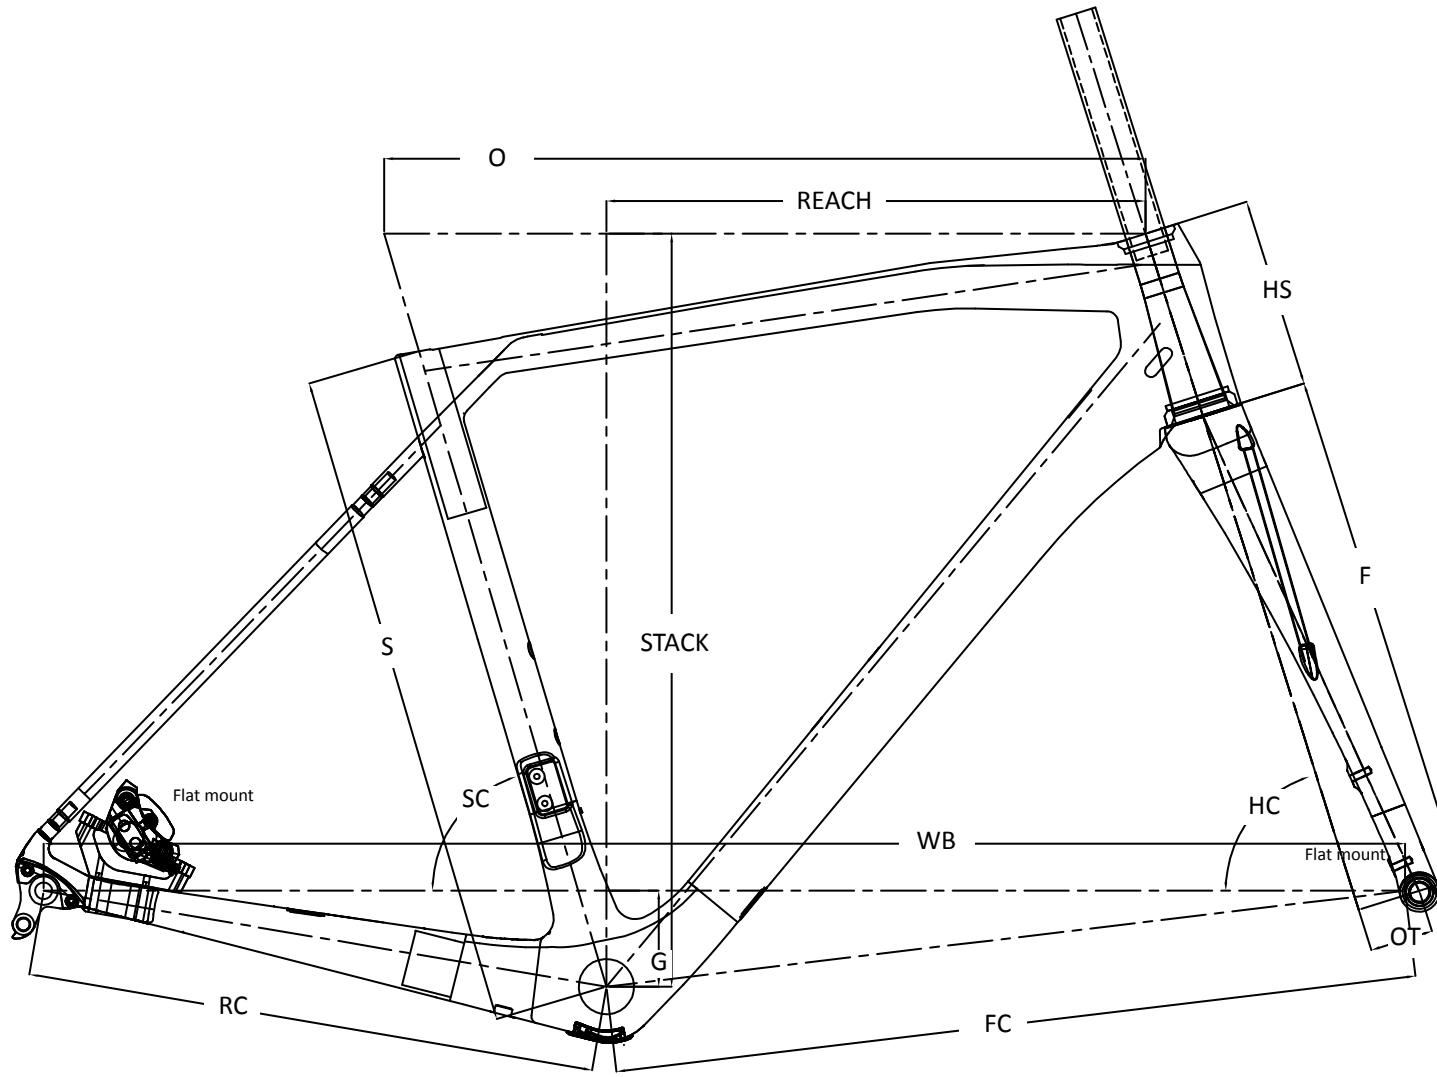
[Back to Index](#)

ALICANTE (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack	HD	HB
450	450	75°	505	100	71°	370	45	965.6	570	405	69	367.7	498	46	46
480	480	74.5°	515	110	71.5°	370	45	967.6	572.7	405	69	371.7	510	46	46
500	500	74.5°	525	115	72°	370	45	973.6	578.6	405	69	374	516.5	46	46
520	520	74°	535	120	72.5°	370	45	974.5	579.5	405	69	381	522.5	46	46
540	540	73.5°	545	140	73°	370	45	975.2	580.3	405	69	384	543.2	46	46
560	560	73.5°	560	160	73°	370	45	990	595	405	69	385	558.3	46	46
580	580	73°	575	180	73.5°	370	45	995	600	405	69	395	584	46	46
600	600	72.5°	590	200	73.5°	370	45	1004.2	609	405	69	396.4	602.7	46	46

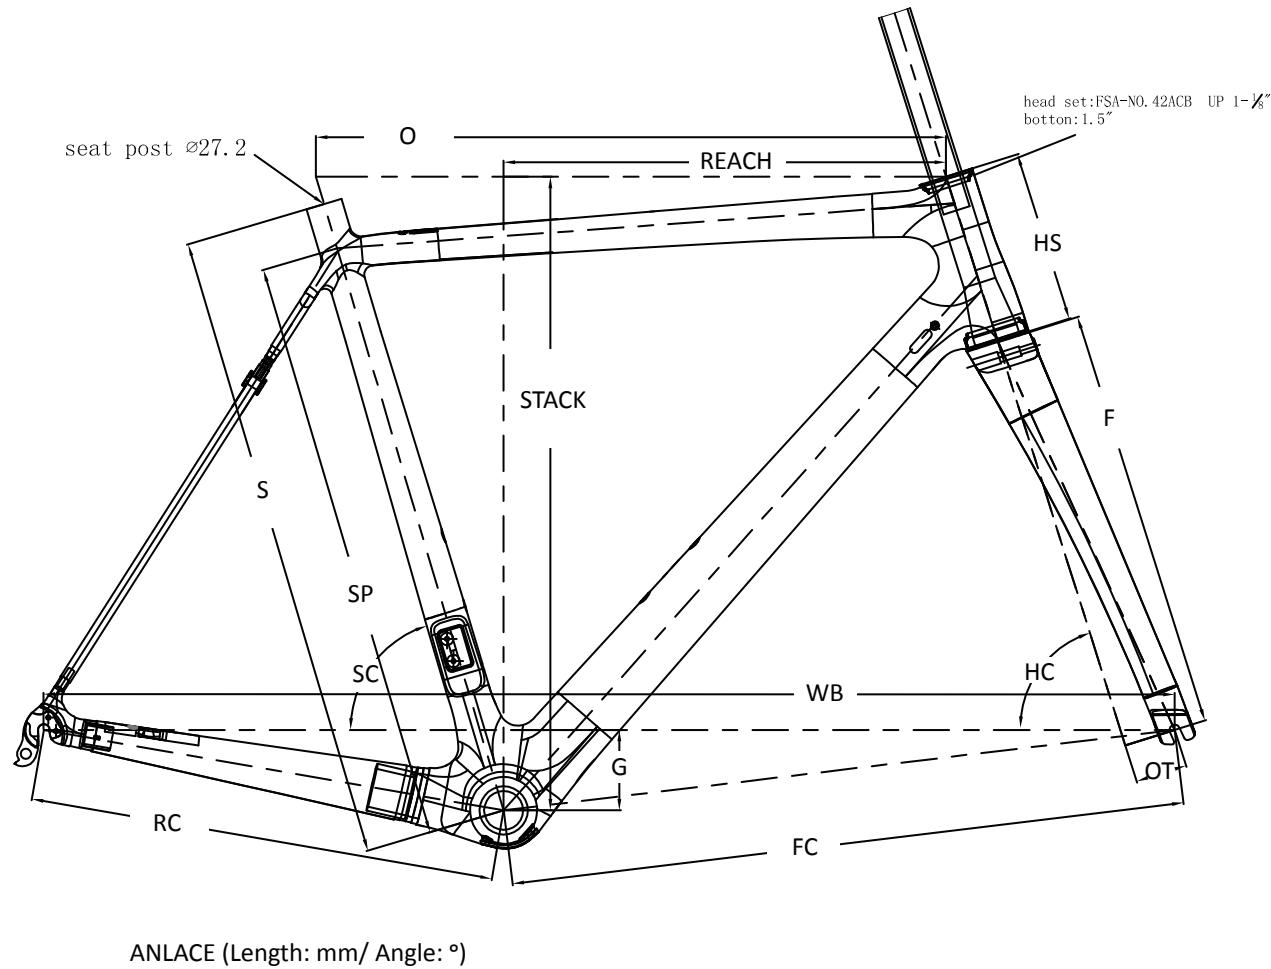
[Back to Index](#)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
440	440	74.5°	520	115	71.5°	368	45	978	577.7	410	68	377.8	511.8
470	470	73.6°	540	135	72.5°	368	45	980.9	580.6	410	68	382.4	534.2
510	510	73°	555	155	73°	368	45	985.5	584.9	410	68	385	555
540	540	73°	570	170	73°	368	45	1000.2	599.7	410	68	395.6	569.3
570	570	72.5°	590	190	73.5°	368	45	1009.4	609	410	68	403.5	590.2

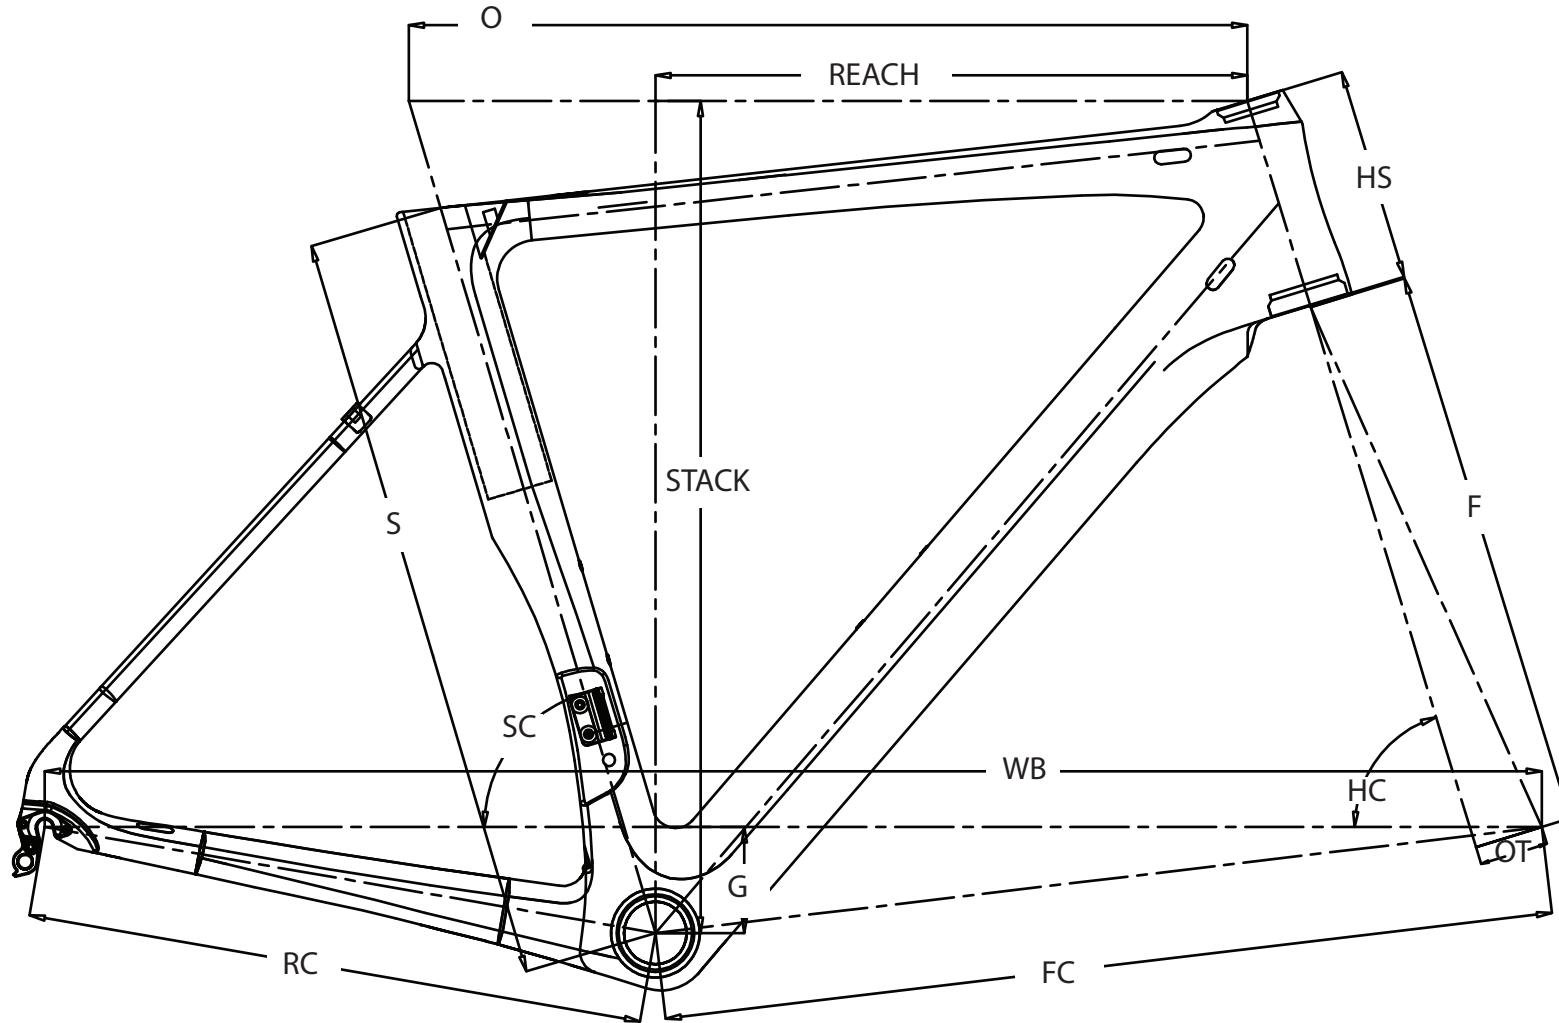
[Back to Index](#)

ALLER-D (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
440	440	74.5°	520	115	71.5°	368	45	978	577.7	410	68	377.8	511.8
470	470	73.6°	540	135	72.5°	368	45	980.9	580.6	410	68	382.4	534.2
510	510	73°	555	155	73°	368	45	985.5	584.9	410	68	385	555
540	540	73°	570	170	73°	368	45	1000.2	599.7	410	68	395.6	569.3
570	570	72.5°	585	190	73.5°	368	45	1009.4	609	410	68	403.5	590.2

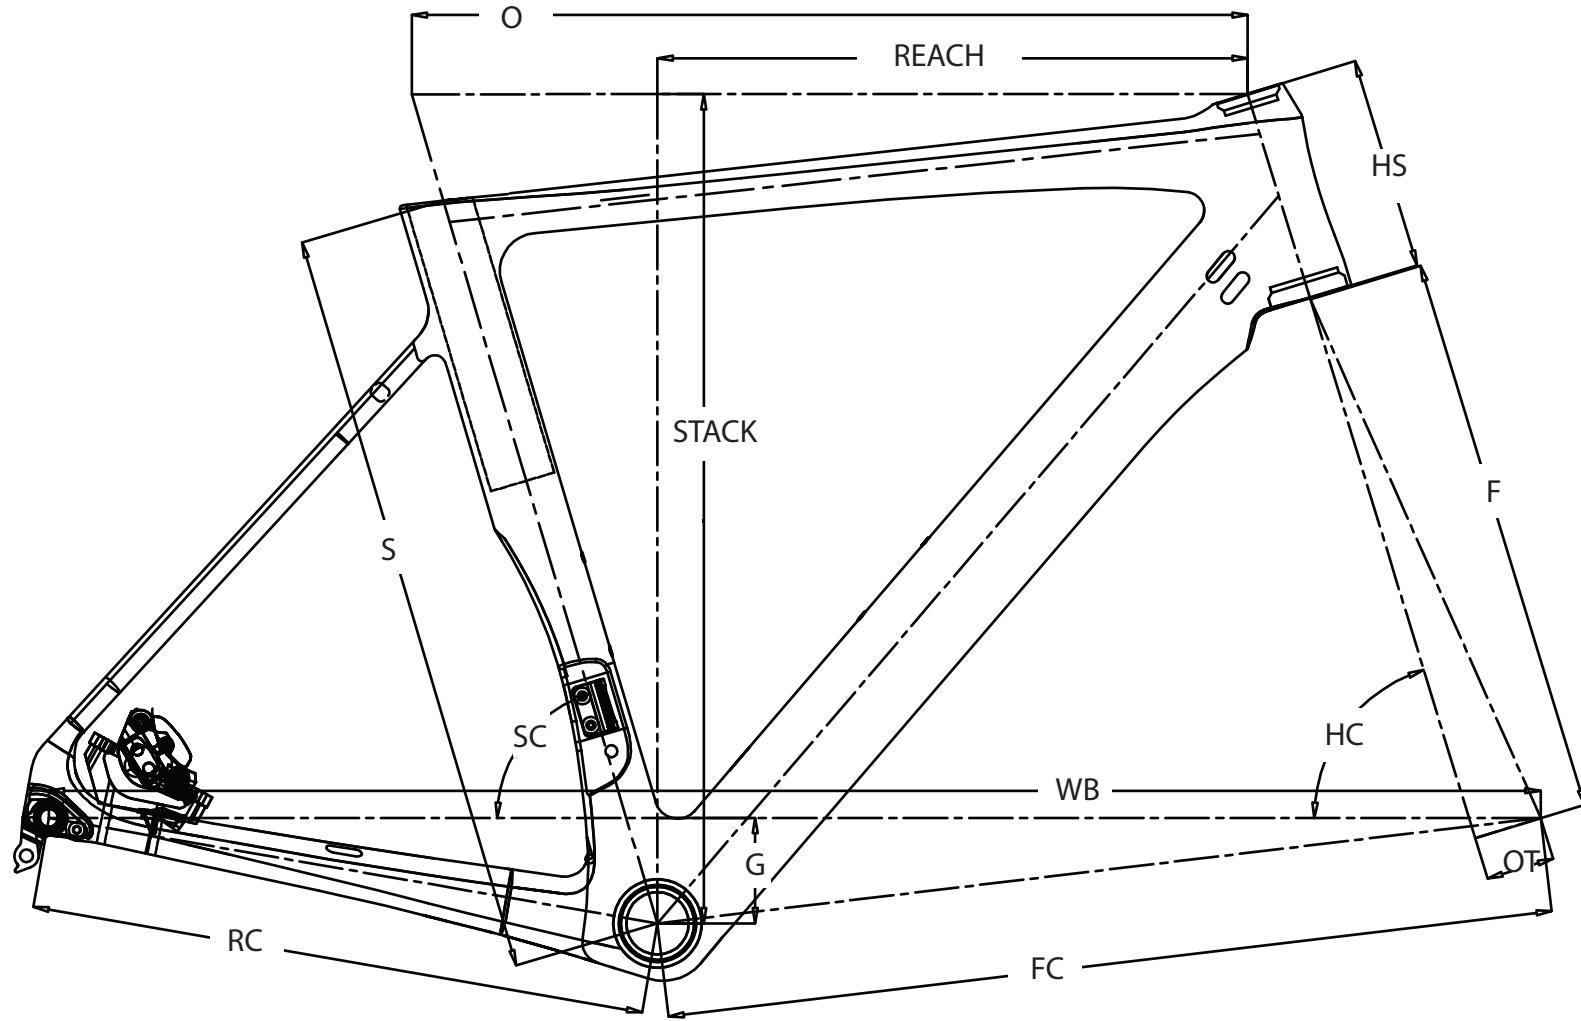


SIZE	S	SP	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	450	400	75°	500	105	70.5°	368	43	963.9	568.3	406	70	365	502
470	470	420	75°	500	110	70.5°	368	43	966.5	570	406	70	365.5	506.2
490	490	450	75°	505	115	71°	368	43	965.4	570	406	70	367.6	512.7
510	510	470	74.5°	517	125	71.5°	368	43	967.1	571.5	406	70	370	524.6
530	530	490	74°	530	135	72°	368	43	967.5	572	406	70	375.4	537
550	550	510	73.5°	548	150	72.5°	368	43	981	585.5	406	70	384.8	551
580	580	540	73.5°	568	170	73°	368	43	996.5	601	406	70	398.3	572

[Back to Index](#)

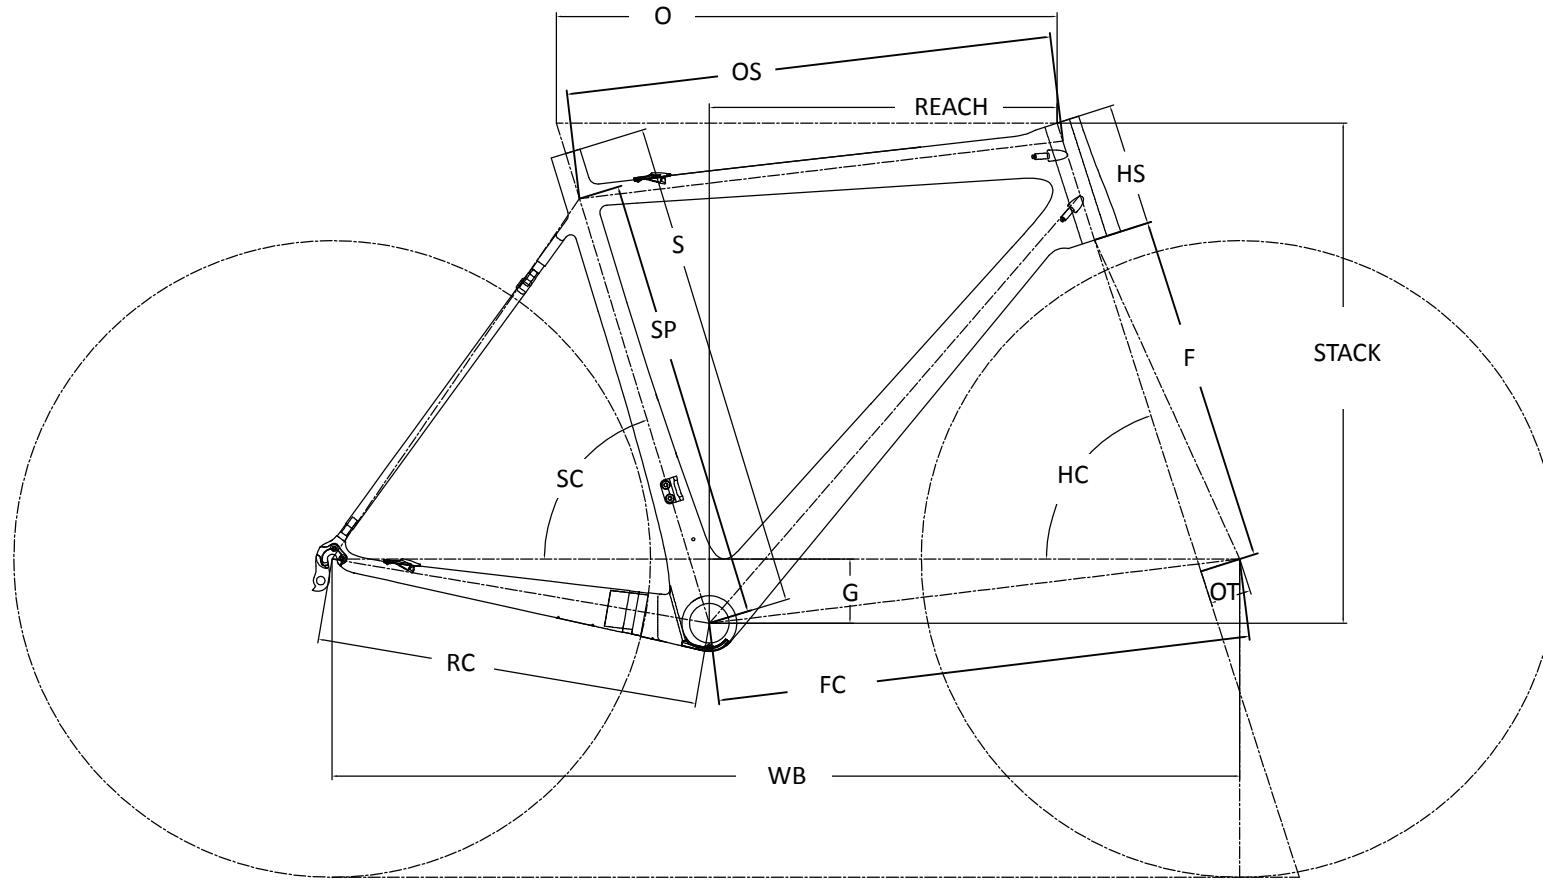
AVANCE-Direct mount (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
430	430	75°	515	100	71.5°	370	45	971.7	576.8	405	69	380.7	501.1
470	470	74°	536	120	72.5°	370	45	975.3	580.4	405	69	385.9	523.4
495	495	73.5°	548	140	73°	370	45	978	583.1	405	69	386.9	543.8
510	510	73.25°	565	160	73.5°	370	45	987.7	592.7	405	69	394.9	565
540	540	73°	587	180	73.5°	370	45	1006.8	611.7	405	69	408.3	584.2

[Back to Index](#)

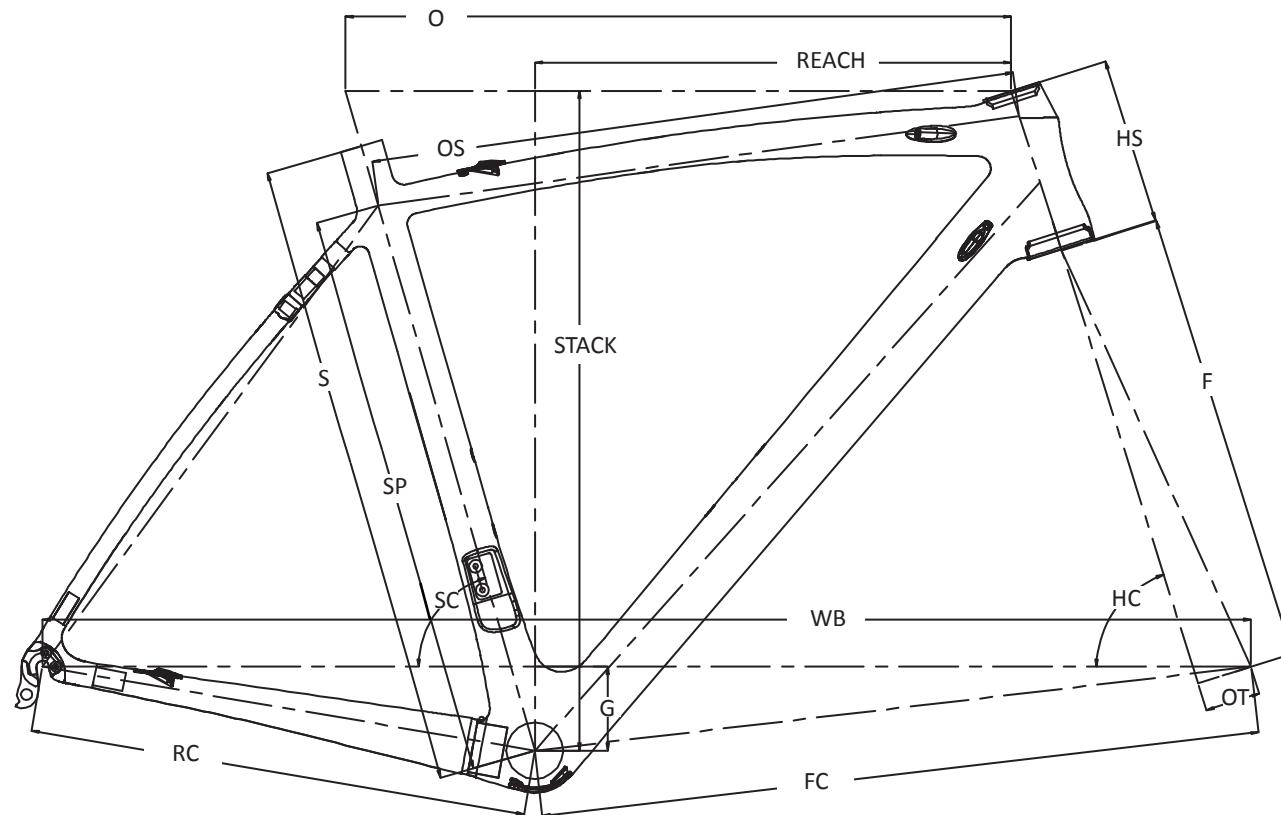
AVANCE-Flat mount disc (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
430	430	75°	515	100	71.5°	370	45	971.7	576.8	405	69	380.7	501.1
470	470	74°	536	120	72.5°	370	45	975.3	580.4	405	69	385.9	523.4
495	495	73.5°	548	140	73°	370	45	978	583.1	405	69	386.9	543.8
510	510	73.25°	565	160	73.5°	370	45	987.7	592.7	405	69	394.9	565
540	540	73°	587	180	73.5°	370	45	1006.8	611.7	405	69	408.3	584.2

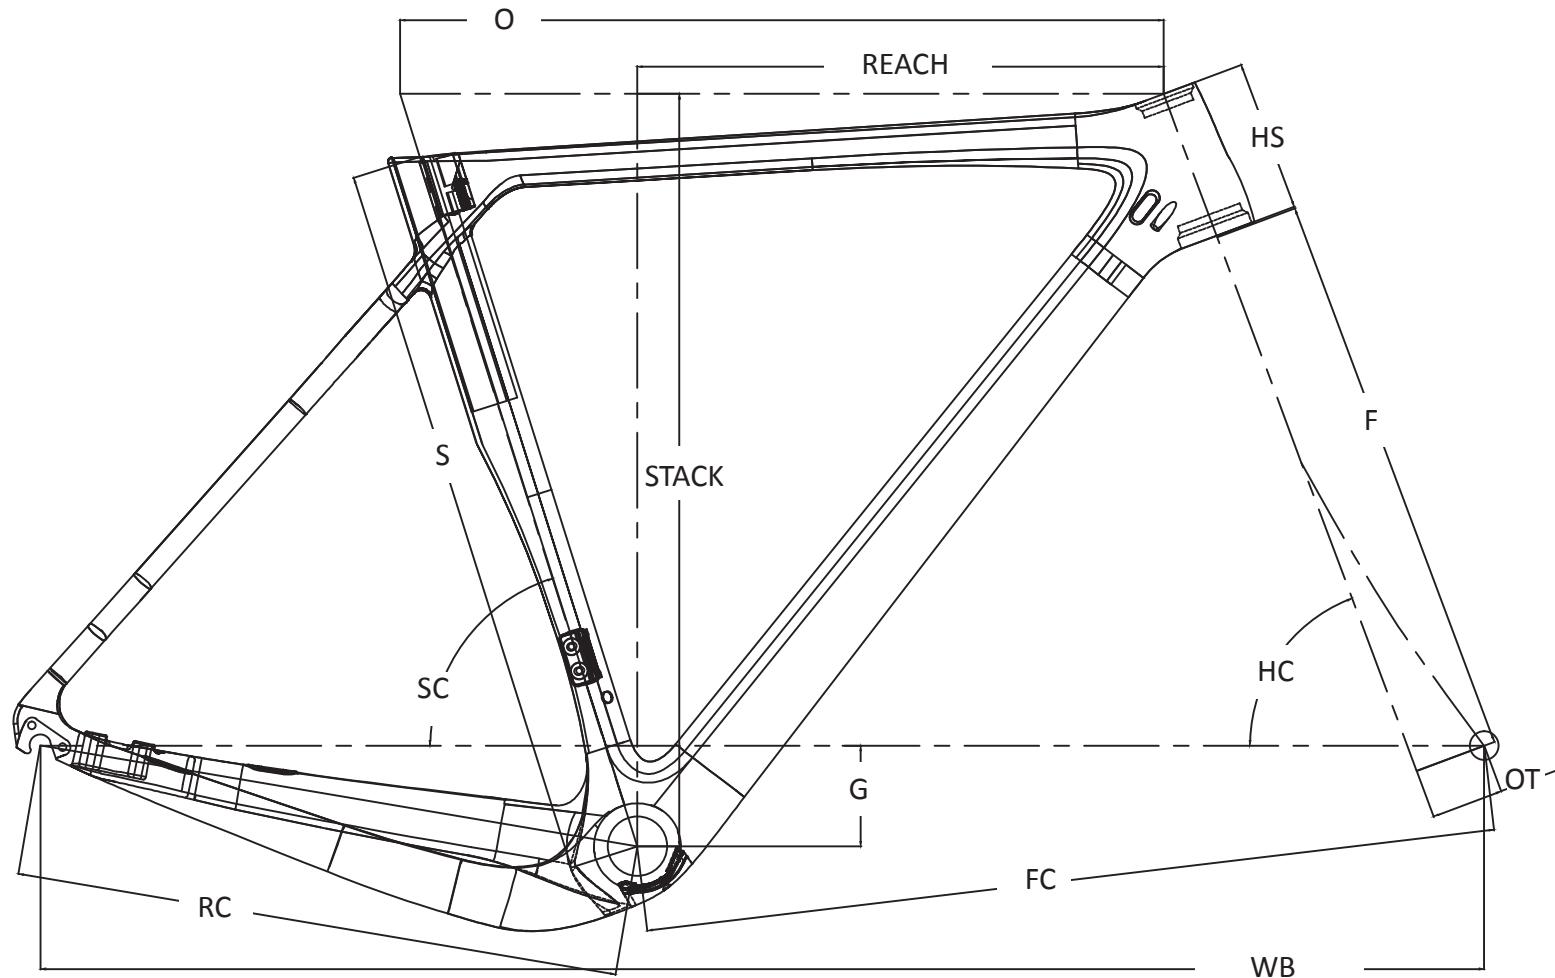
[Back to Index](#)

AXION SL (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
470	470	420	75°	500	487.1	100	71.5°	371	43	955.1	560	405	68	366.4	498.6
490	490	440	74°	510	494.8	120	72°	371	43	952.3	557.1	405	68	360.4	521.7
510	510	460	73.5°	530.4	514.3	132.8	72.1°	371	43	967.2	572	405	68	372.2	534.2
540	540	490	73°	548	532.7	145	73.1°	371	43	970.5	575.3	405	68	380.1	549.2
565	565	515	72.5°	569.1	552.4	171.1	73.1°	371	43	986.1	590.7	405	68	388.1	574.2
590	590	540	72°	590.7	572.6	197.3	73.1°	371	43	1004.6	606.2	405	68	396	599.3

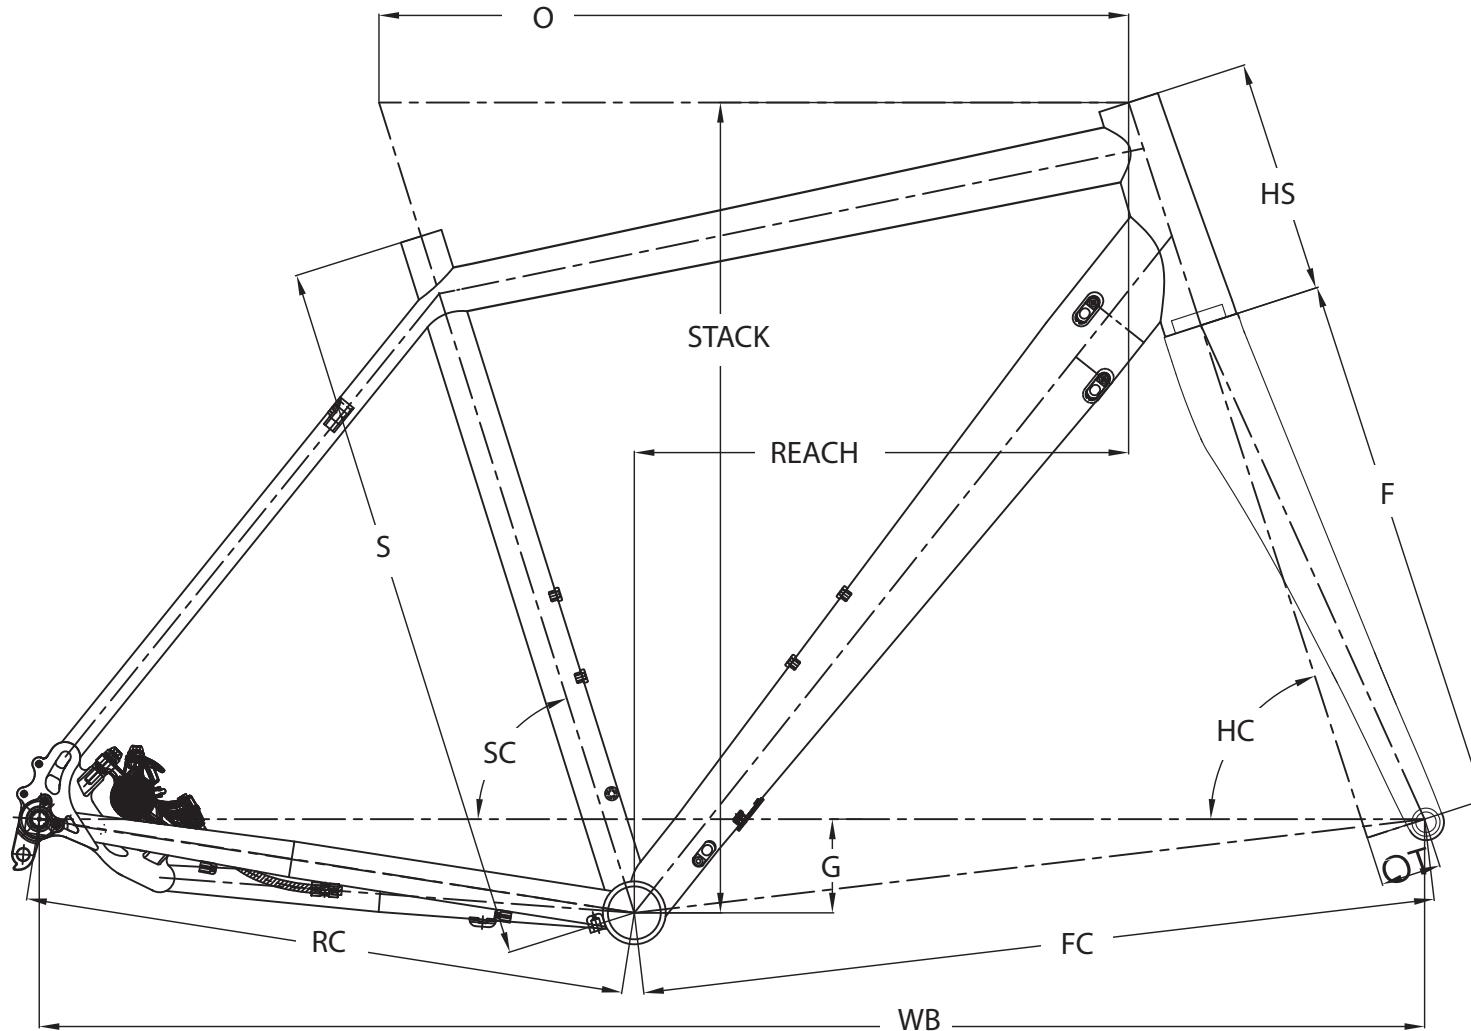


SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	450	400	75°	510	495.5	100	71°	368	45	970.4	575.8	405	70	376.6	498.7
480	480	430	74.5°	525	510	115	72°	368	45	973	578.4	405	70	381.8	516.3
510	510	460	74°	540	524.7	135	72.5°	368	45	980.2	584.9	405	68	386.5	535
540	540	490	73.5°	555	539.7	155	73°	368	45	985.8	590.4	405	68	390.3	555.9
570	570	520	73°	570	555.4	175	73°	368	45	995.5	600.1	405	68	394.2	575

[Back to Index](#)

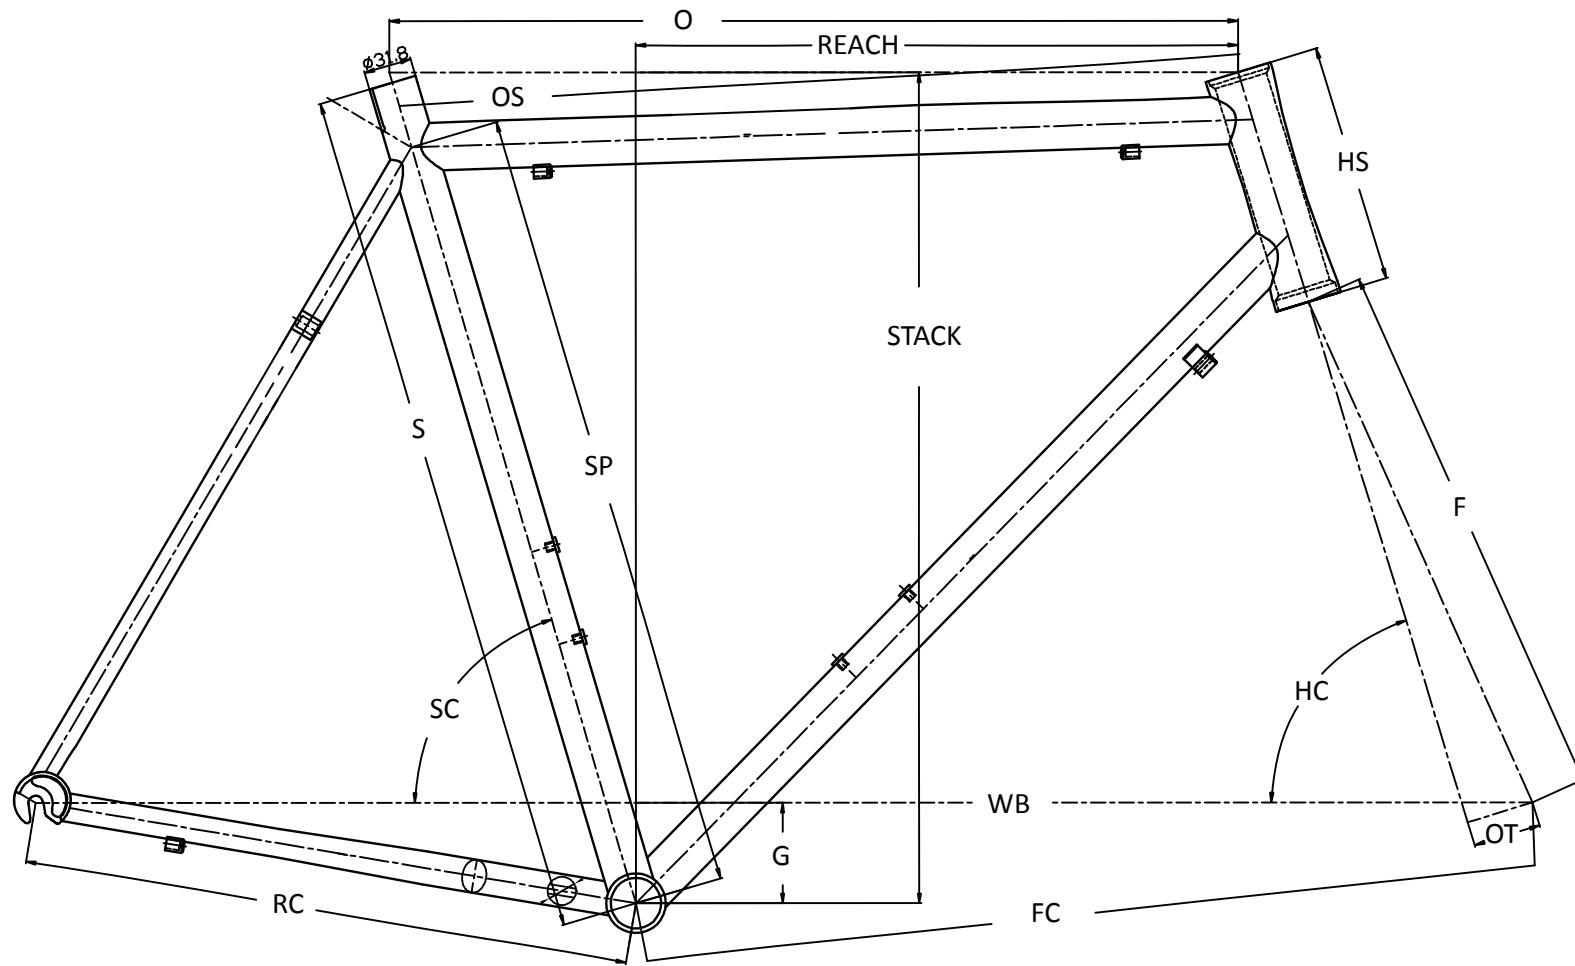
GRAVEL (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
500	500	72.5°	530	105	70°	395	45	1001	592	420	70	365	522
530	530	72.5°	550	130	71°	395	45	1008	598	420	70	375	551
560	560	72.5°	570	155	72.5°	395	45	1014	604	420	70	387	580
590	590	72.5°	590	180	72.5°	395	45	1032	622	420	70	398	609

[Back to Index](#)

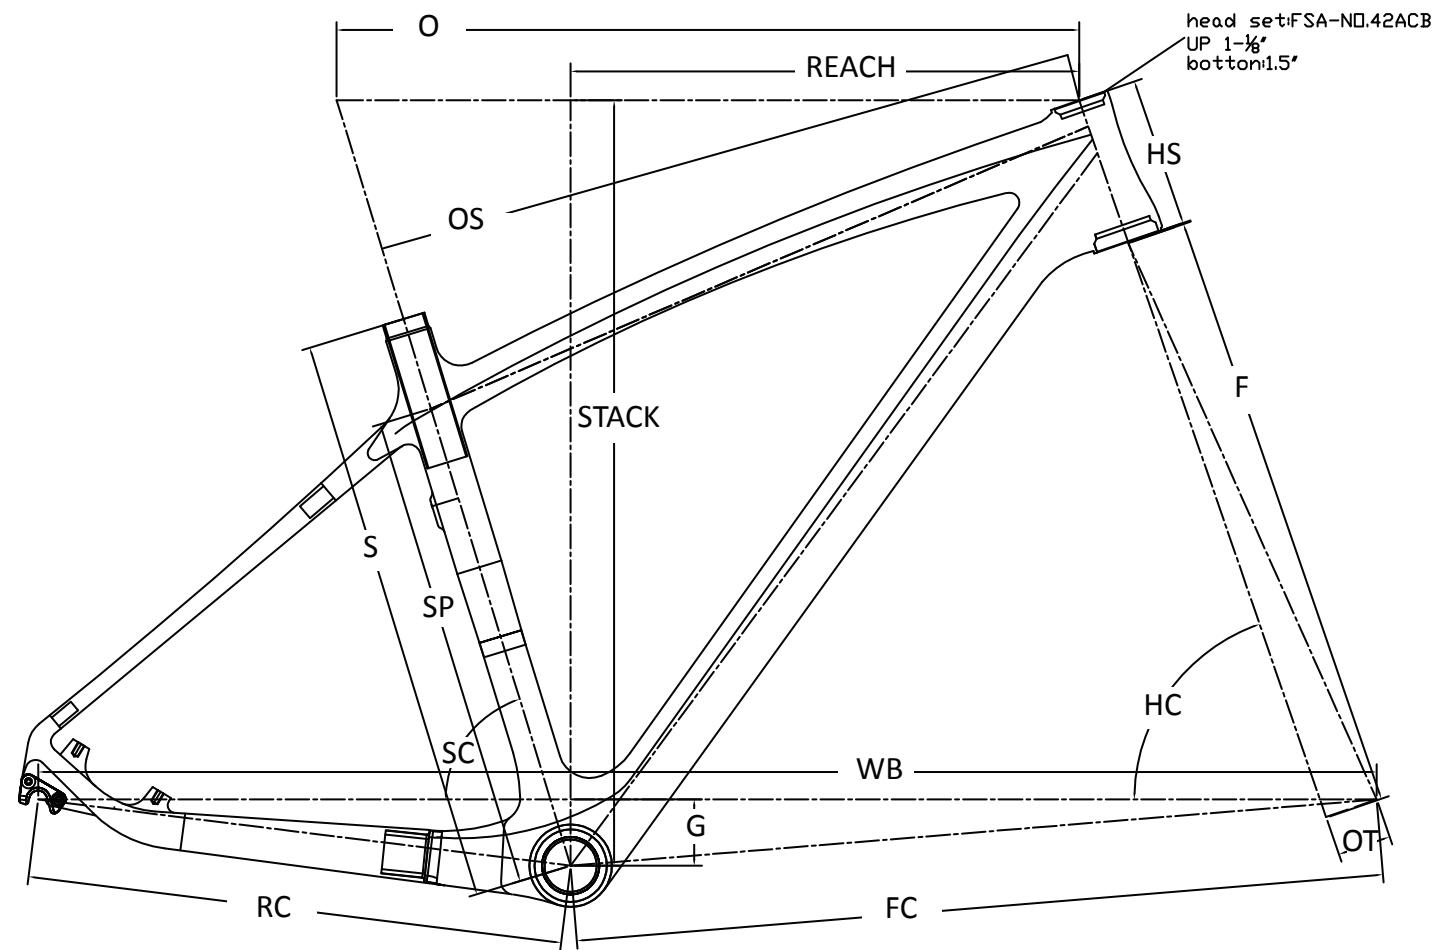
GRAVEL ALU (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
450	455	74.5°	515	100	70°	405	45	1027	580	450	70	368.6	527.7
490	495	73.5°	535	120	70.5°	405	45	1035	586	450	70	372.5	548.4
520	520	73°	550	140	70.5°	405	45	1045	592	450	70	376.6	567.3
540	540	73°	565	160	71.5°	405	45	1050	598	450	70	384.6	590.1
570	575	72.5°	580	185	72°	405	45	1055	604	450	70	385.8	615.8
600	605	72°	600	210	72°	405	45	1070	622	450	70	392.2	639.6

[Back to Index](#)

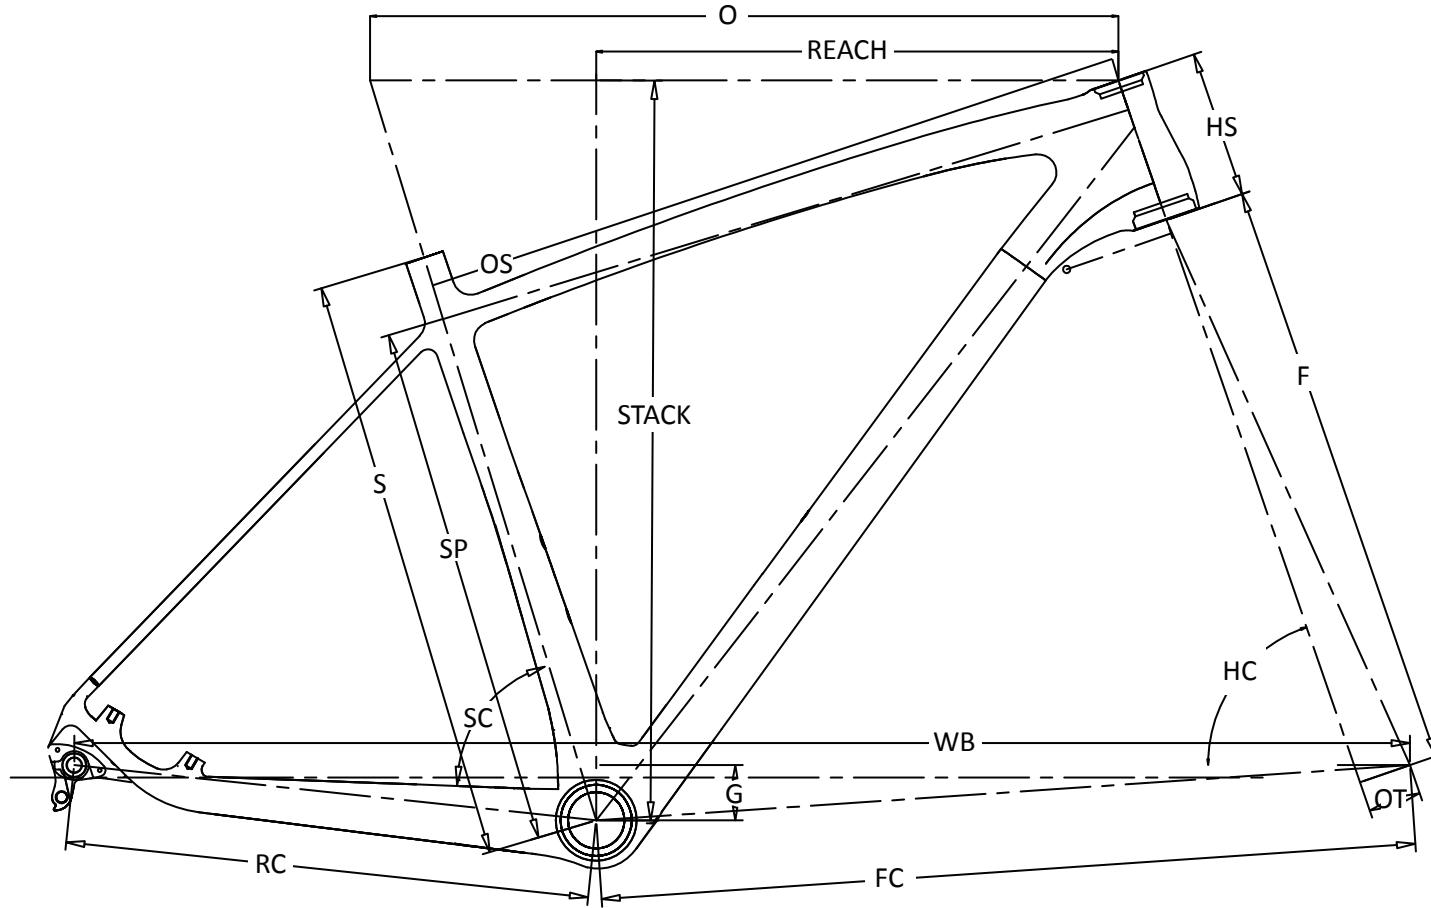
ASCETIC (Length: mm/ Angel: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
510	510	465	74°	520	516.1	102	72.5°	365	45	959.7	564.22	405	67	377.74	496.21
530	530	485	74°	535	530.9	120	73°	365	45	970.8	575.27	405	67	387.35	515
550	550	505	73.5°	550	545.1	140	73°	365	45	981.1	585.5	405	67	391.81	534.13
570	570	525	73.5°	565	560.15	160	73°	365	45	996.3	600.6	405	67	401.14	553.25
590	590	545	73°	575	569.31	180	73°	365	45	1003	605.29	407	67	400.01	572.37



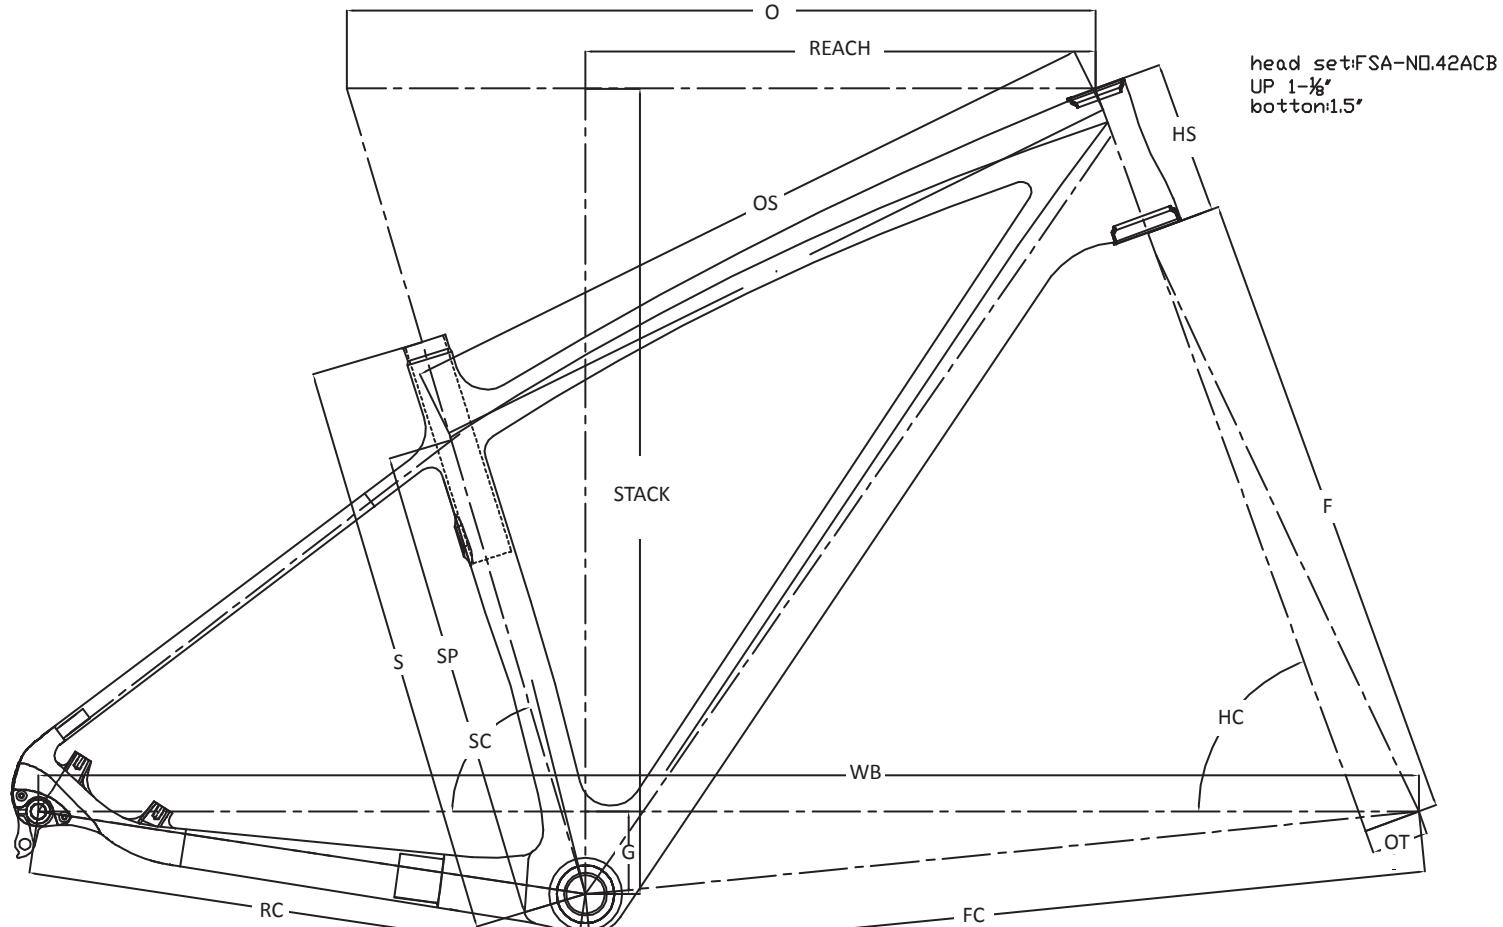
PICCOLO 650B (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
16"	412	348	73°	575	556.5	112	69°	485	43	1074	649.5	427	45	395.4	587.3
18"	450	374.5	73°	595	574	120	71°	485	43	1074.5	650	427	45	410	604.9
20"	500	423	73°	620	594	140	71°	485	43	1098	675.5	427	45	429.2	624.2

[Back to Index](#)

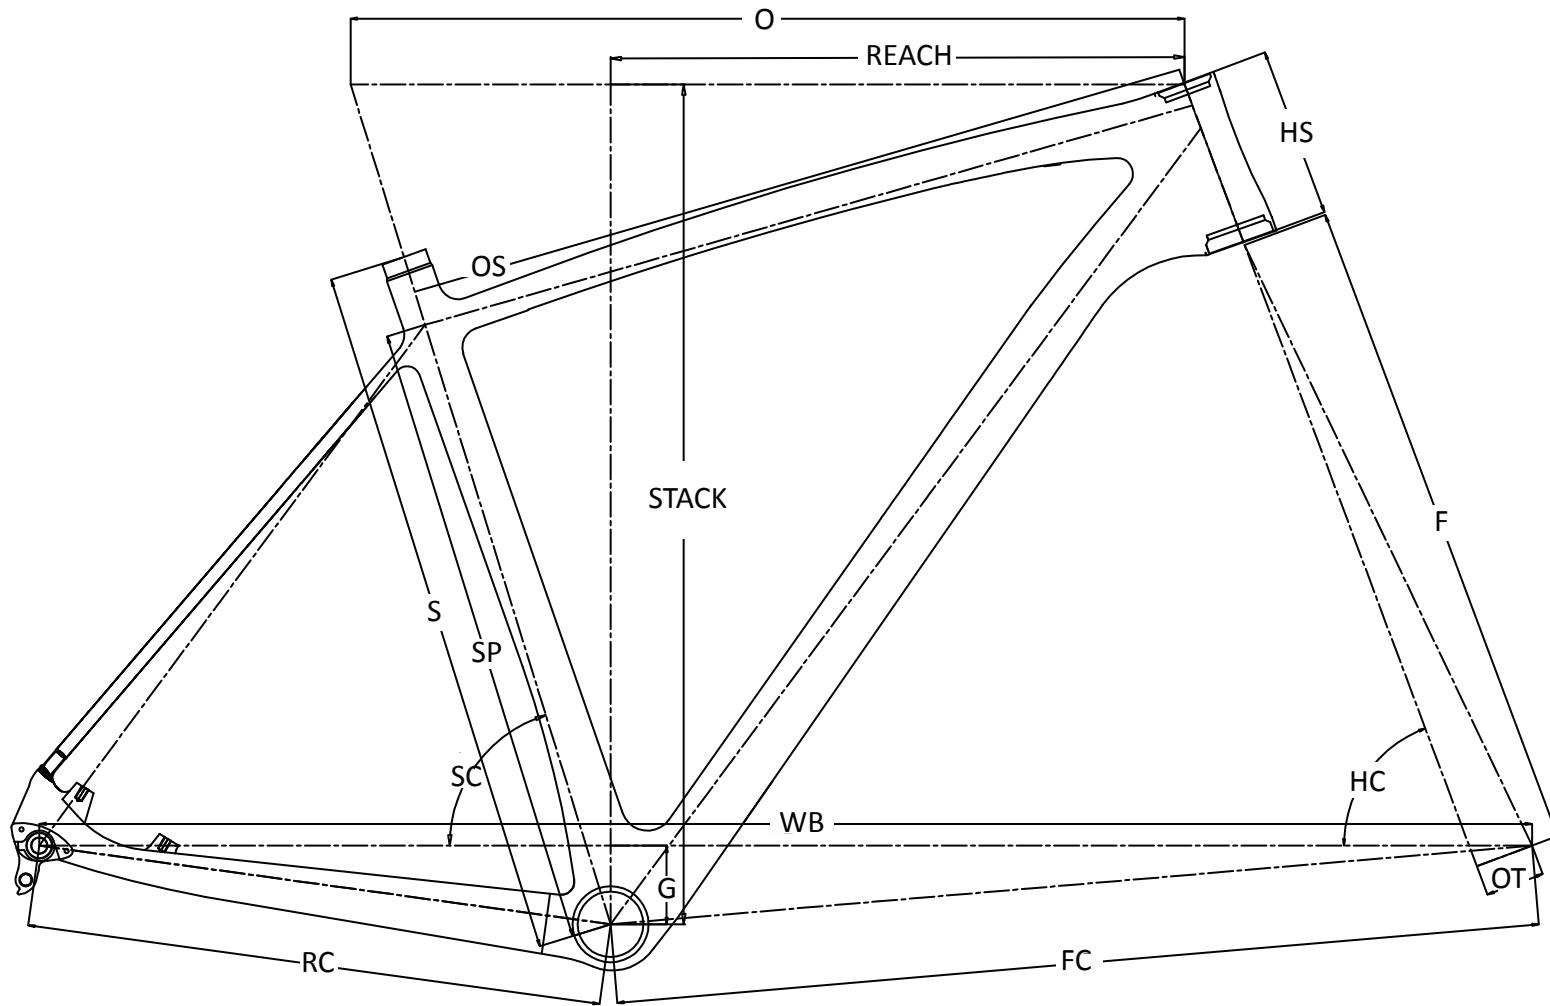
PICCOLO 650B SL (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15.5"	400	347.3	73.5°	570	555.9	101	70°	485	43	1064.4	640.3	428	45	398	581
17.5"	435	381.6	73°	595	570.8	115	70.5°	485	43	1078	654	428	45	410.1	598.1
19"	480	427.1	73°	610	584.2	120	71°	485	43	1089.1	665	428	45	425.7	603.4
20.5"	520	466.9	73°	625	599.1	130	71°	485	43	1104.5	680.3	428	45	437.8	618

[Back to Index](#)

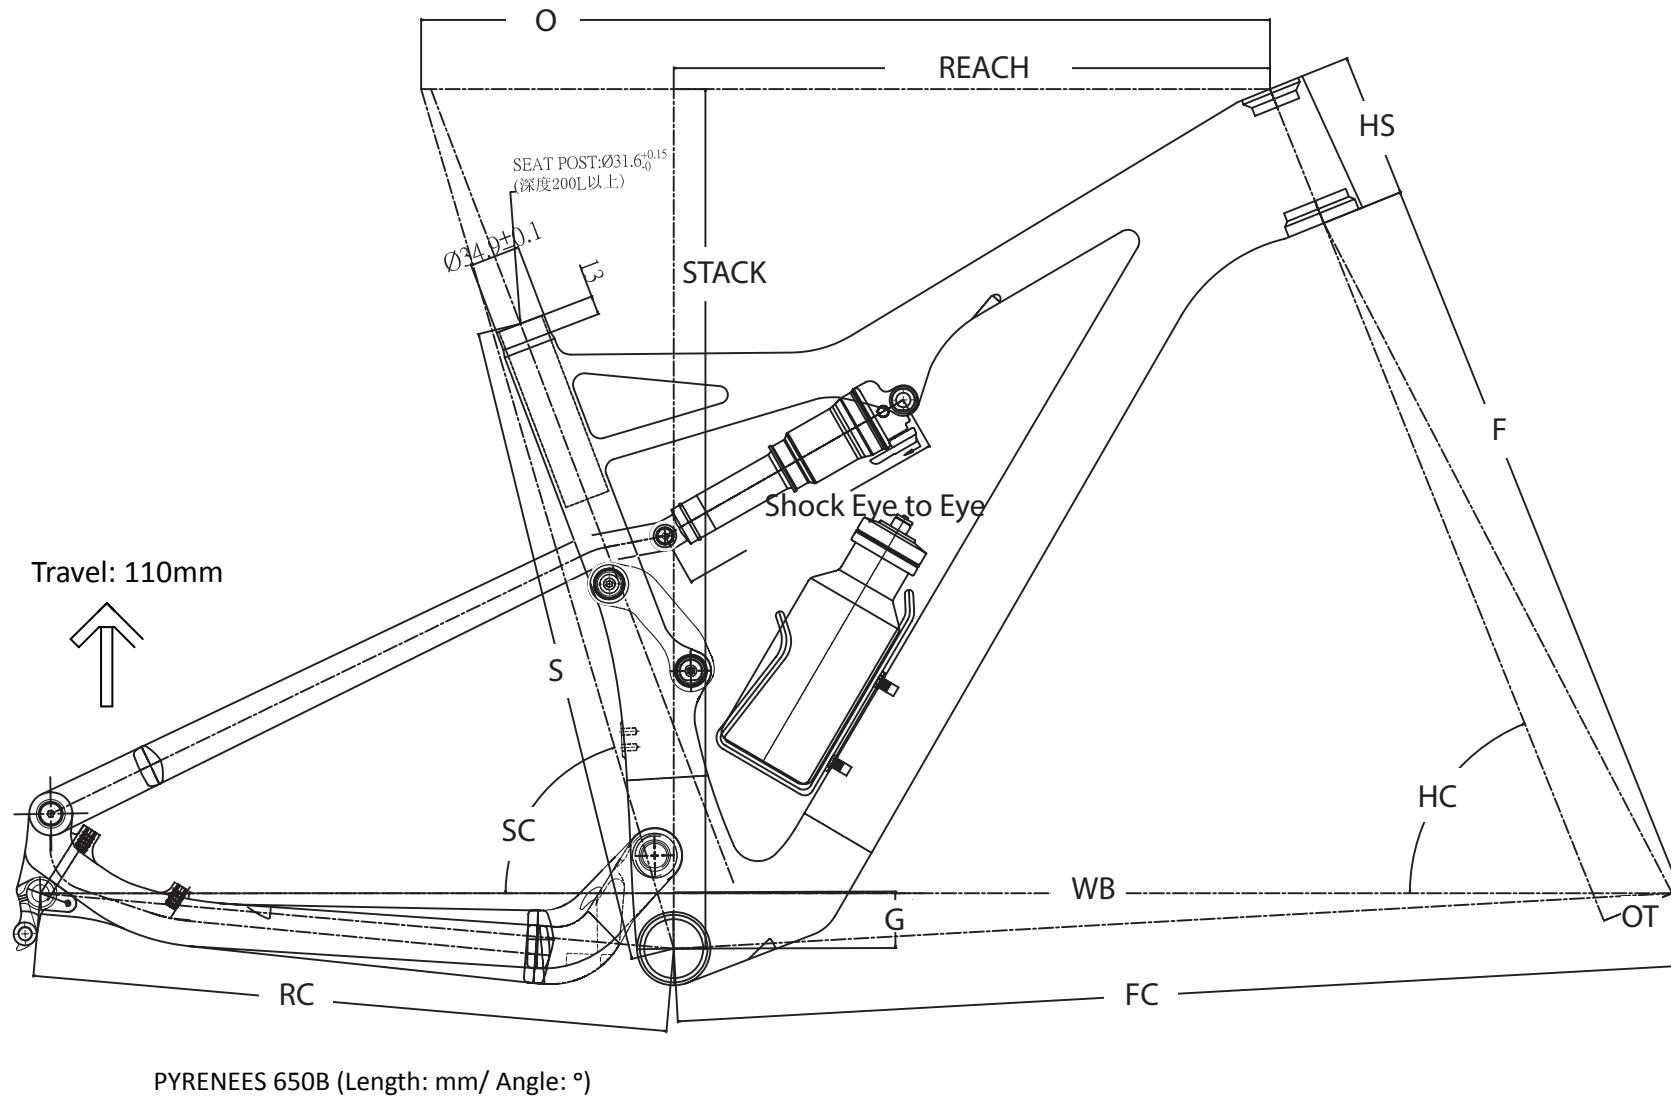
PICCOLO 29ER (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
16"	406.5	330.8	73.7°	570.8	567	105	70.7°	506	45	1066.7	635.1	440	65.5	387.3	627.5
18"	458	376.3	73.5°	594	578.5	120	71°	506	45	1084.6	652.8	440	65.5	403.2	643
20"	508	419.5	73.3°	615	590.3	130	72.7°	506	45	1103.9	672	440	65.5	419.3	652.4

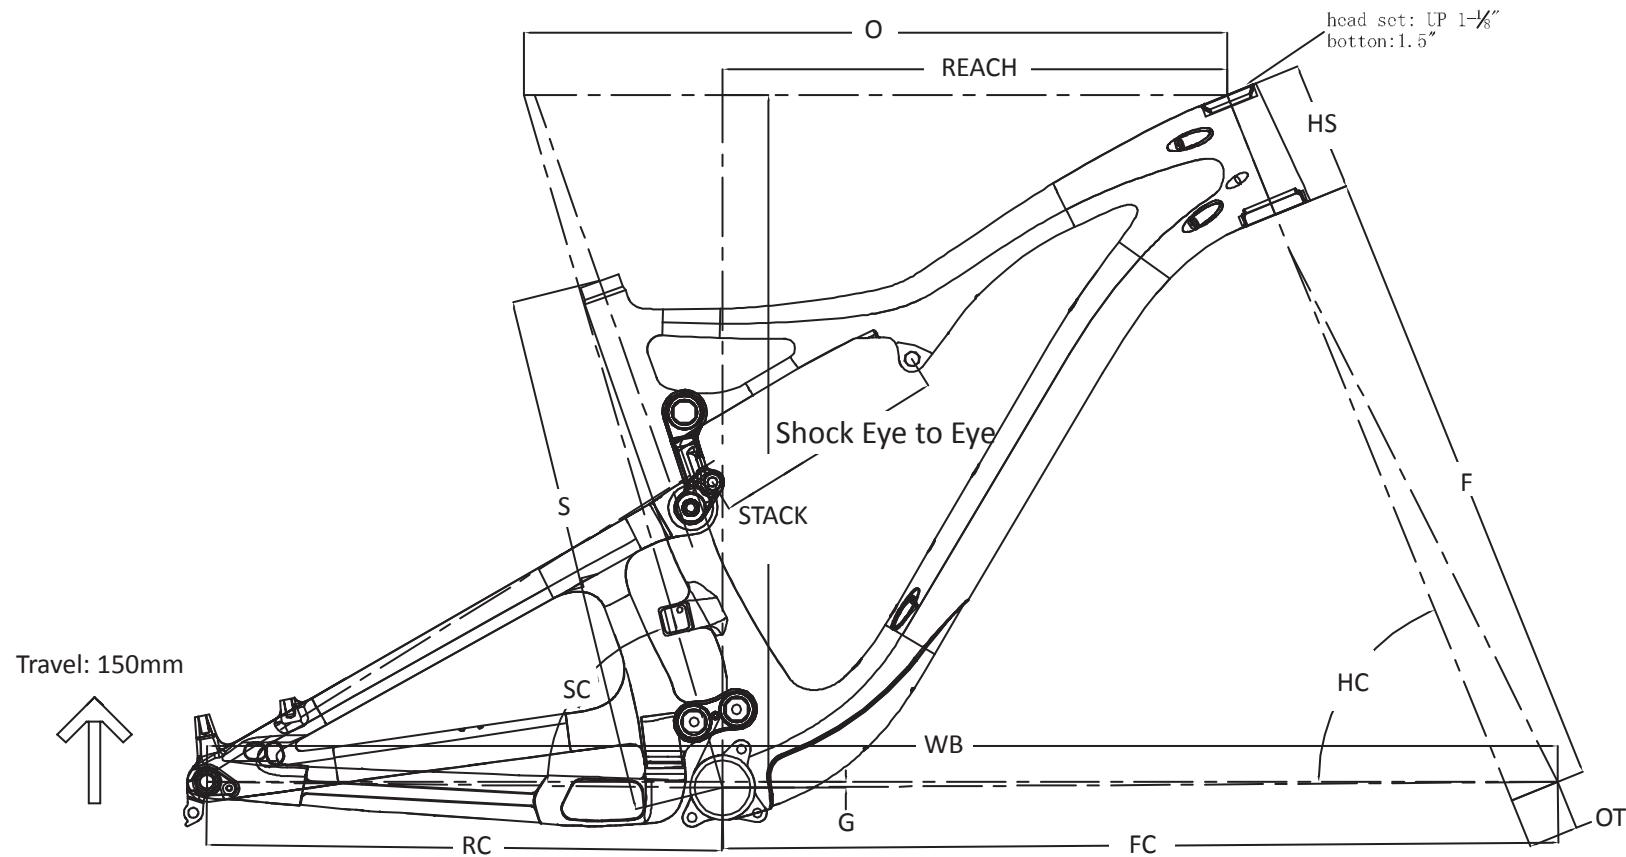
[Back to Index](#)

PICCOLO 29ER SL (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15.5"	395	341	72.5°	580	555	100	69.5°	506	45	1077.4	644.3	440	60	387.1	611.9
17.5"	440	385	72.5°	600	572	105	69.5°	506	45	1097.7	664.5	440	60	405	618
19"	483	431.3	72.5°	620	584.7	120	69.5°	506	45	1117.6	684.3	440	60	419.8	632.1
21"	533	478.2	72.5°	640	606.5	130	69.5°	506	45	1139.3	705.7	440	60	438	640.8

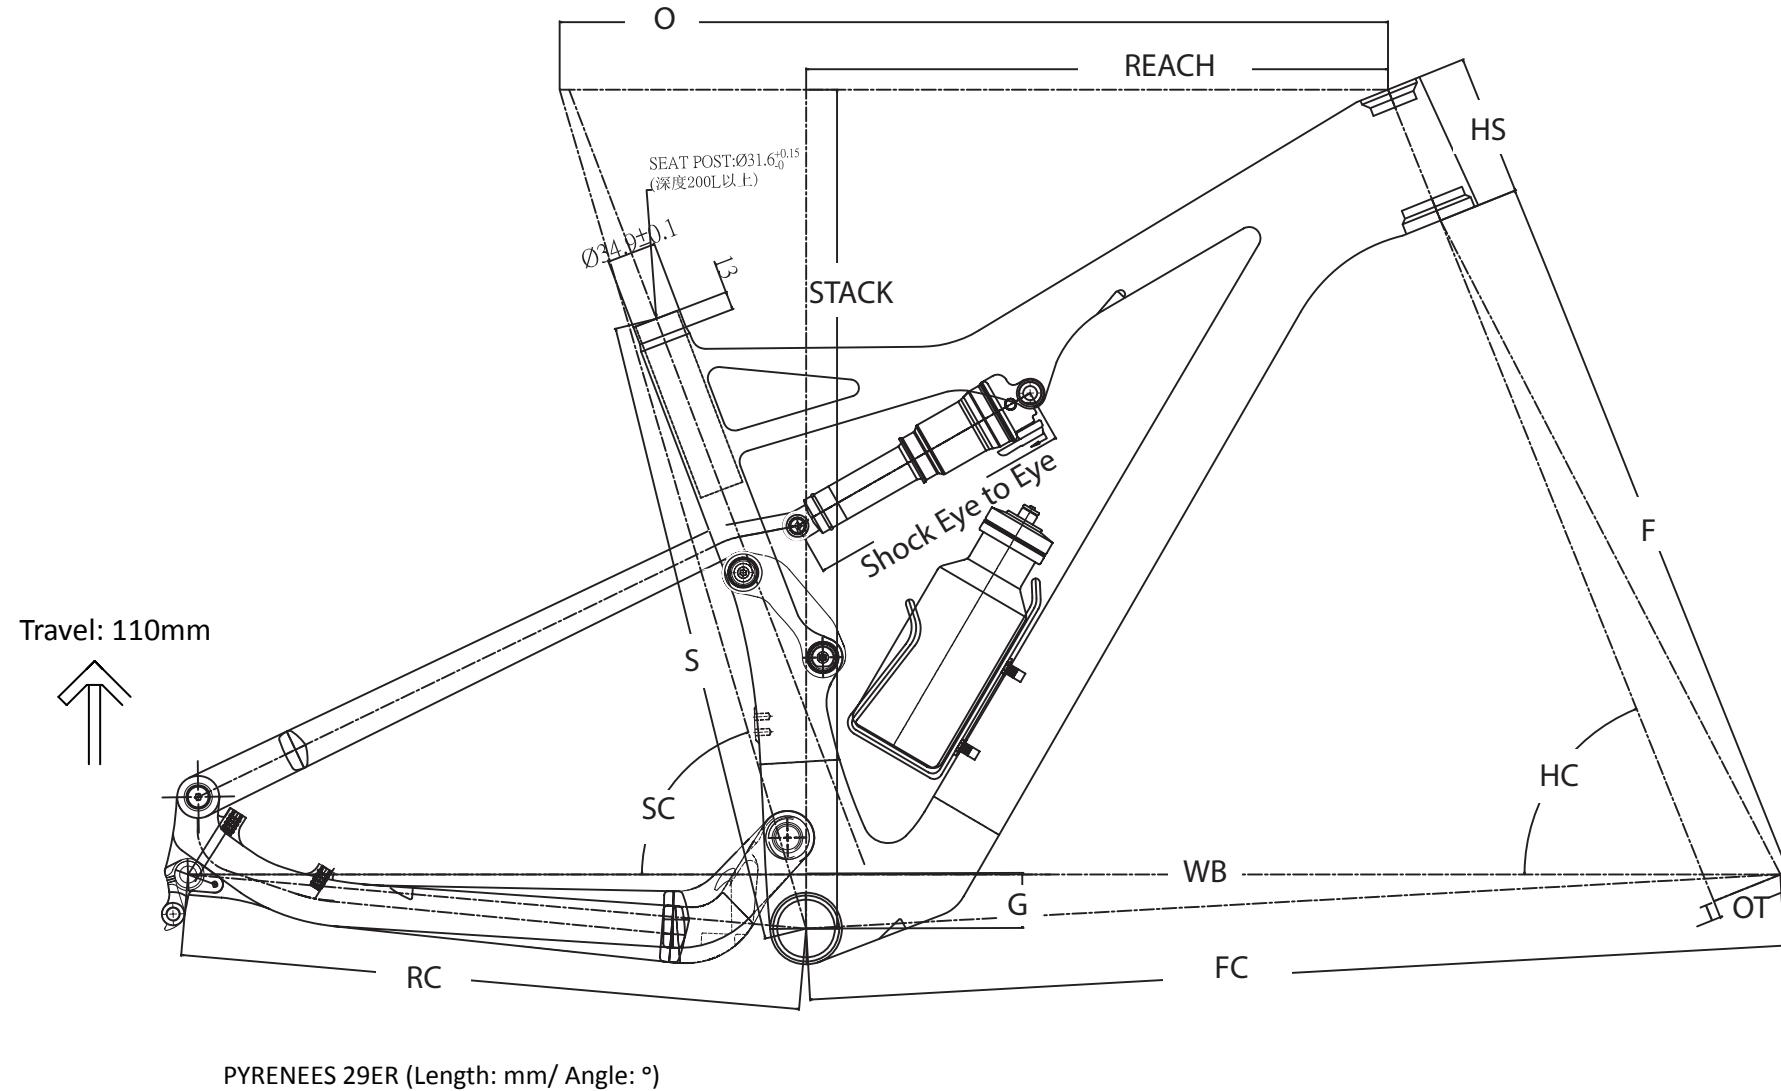
[Back to Index](#)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack	Travel	Shock Eye to Eye
15.5"	395	74.5°	559	95	69°	502	51	1098	662.1	435	45	397.6	582	110	190
17.5"	445	74.5°	585	100	69°	502	51	1117.7	686.6	435	45	412.7	588.7	110	190
19"	483	74.5°	600	115	69°	502	51	1141	705.1	435	45	433.4	600.7	110	190
20.5"	520	74.5°	630	125	69°	502	51	1172	736.1	435	45	460.8	610	110	190



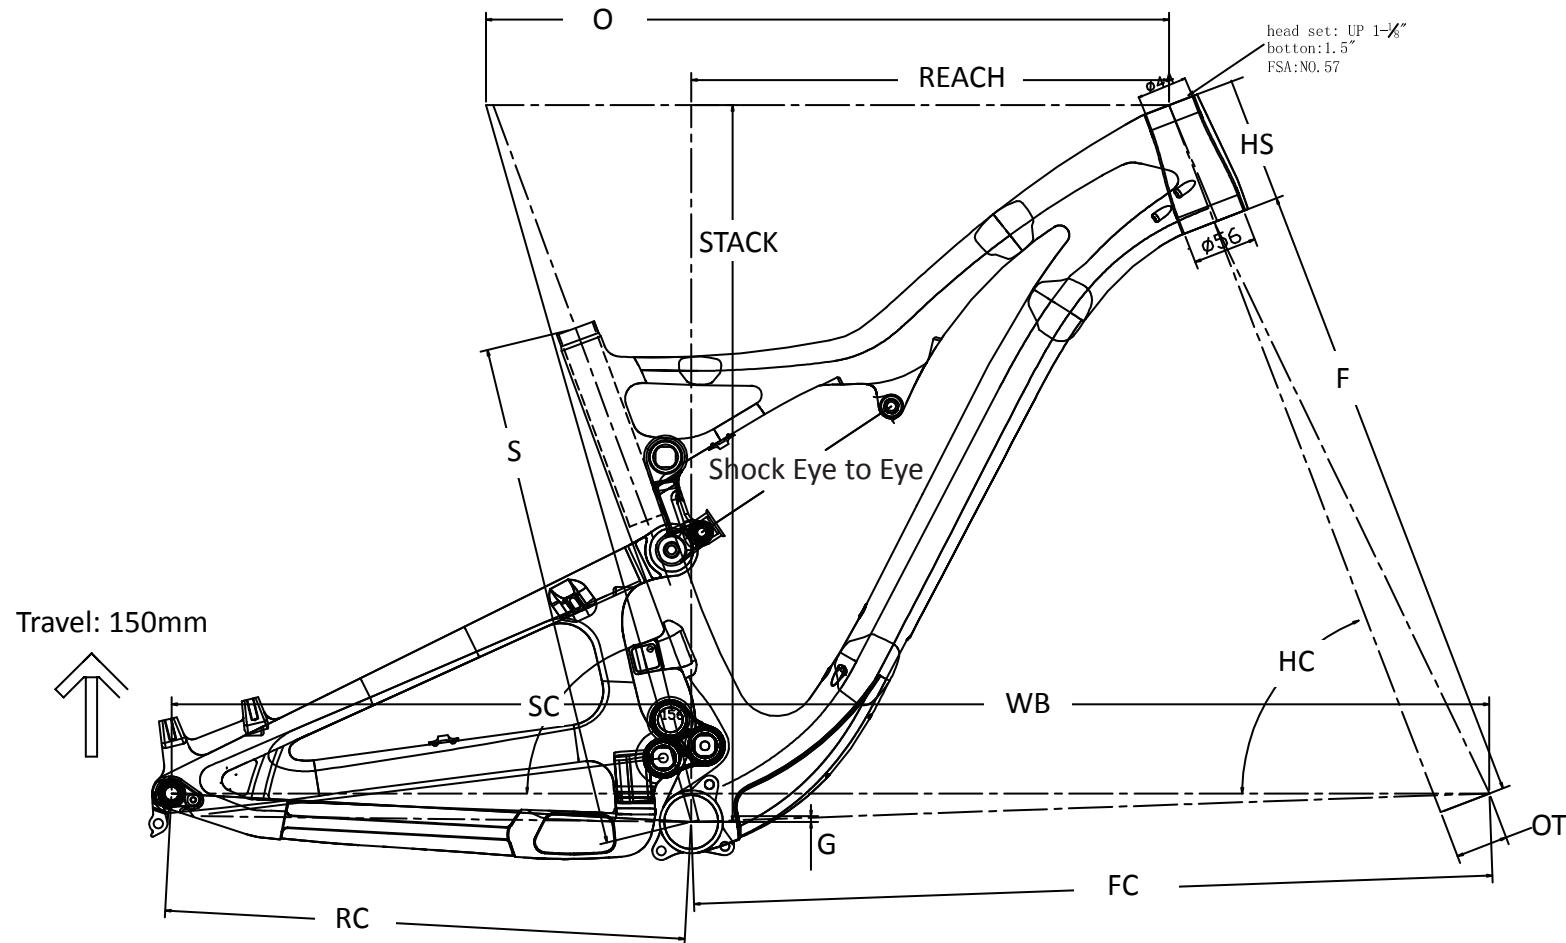
PYRENEES 650B AM PRO 150 (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack	Travel	Shock Eye to Eye
15.5"	400	74°	580	100	68°	540	45	1134.7	694.8	440	5	413.2	591	150	200
17.5"	445	74°	600	110	68°	540	45	1155.5	715.5	440	5	430.2	591	150	200
19"	483	74°	620	120	68.5°	540	45	1171	731	440	5	447.1	602.9	150	200

[Back to Index](#)

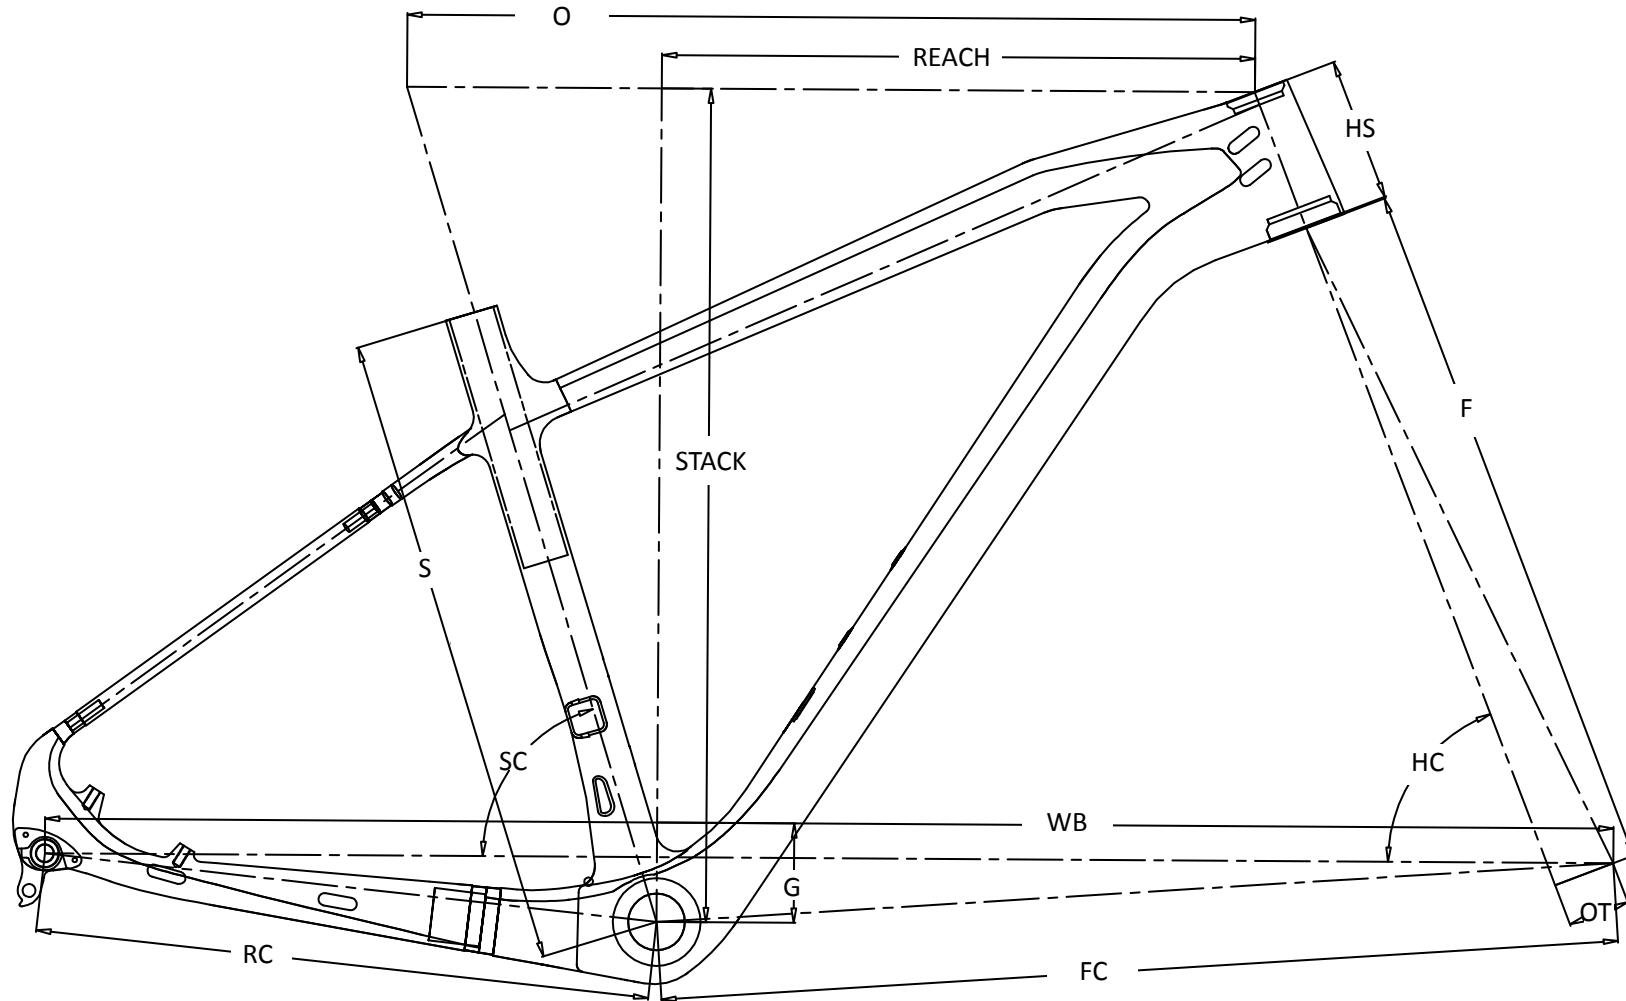
PYRENEES 29ER (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack	Travel	Shock Eye to Eye
15.5"	395	73.6°	560.5	95	68°	520	51	1105.5	668.1	440	38	386.9	589.2	110	190
17.5"	445	73.6°	587.5	100	68°	520	51	1129.5	692.1	440	38	412.7	595.1	110	190
19"	483	73.6°	602	115	68°	520	51	1149	711.4	440	38	422.4	608.5	110	190
20.5"	520	73.6°	632	125	68°	520	51	1180	742.6	440	38	449.6	618.3	110	190



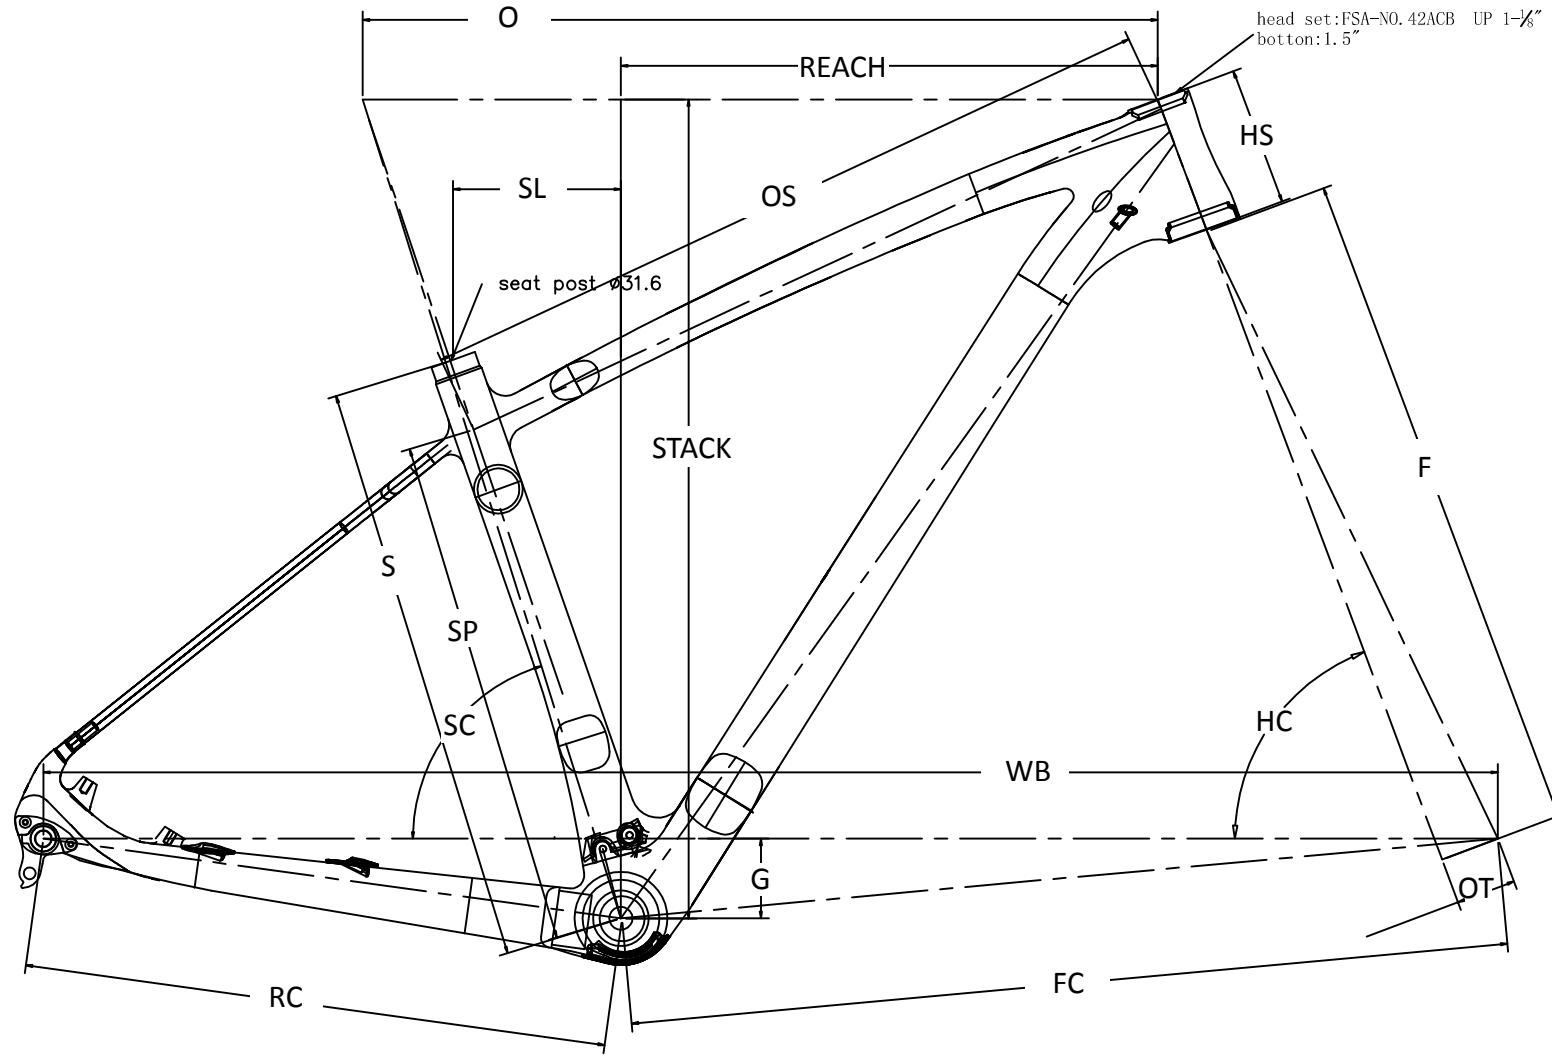
PYRENEES 29ER AM PRO 150 (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack	Travel	Shock Eye to Eye
15.5"	400	74°	580	100	69°	550	46	1136.2	680	457	25	402.2	620	150	200
17.5"	440	74°	600	110	69°	550	46	1157	701	457	25	419.5	629.3	150	200
19"	480	74°	620	120	69°	550	46	1178	722	457	25	436.8	638.7	150	200
21"	530	74°	640	135	69°	550	46	1198.9	743	457	25	454.2	648	150	200

[Back to Index](#)

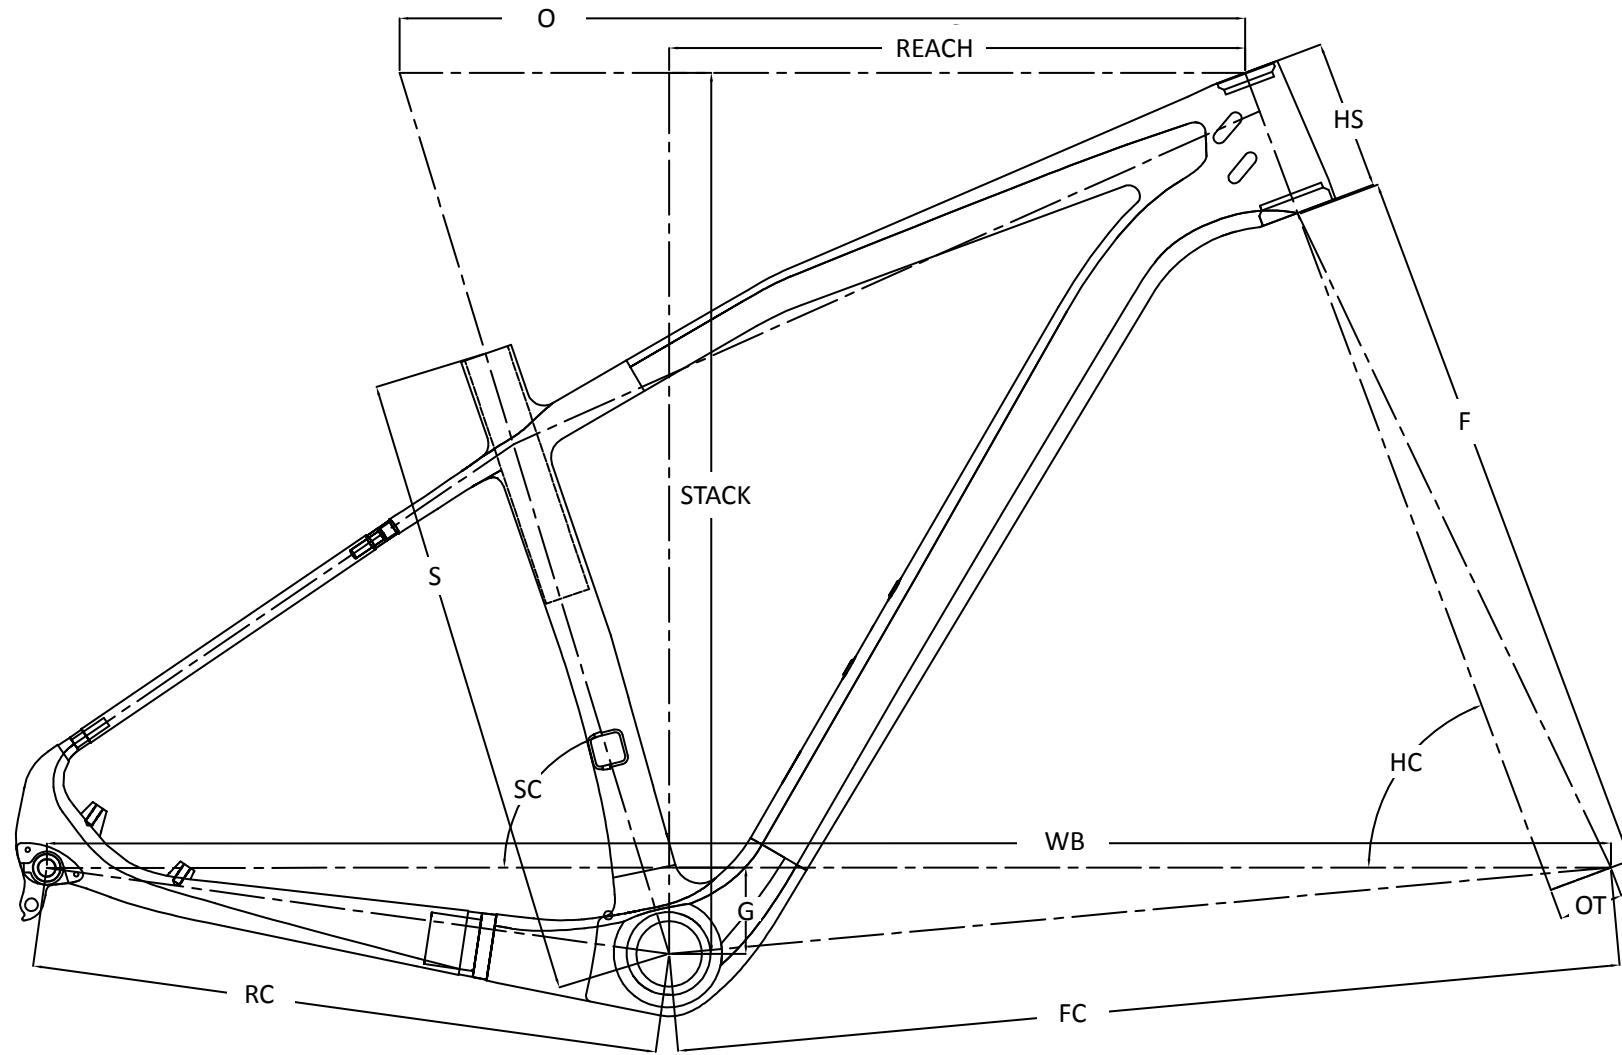
PHAETON 650B (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15.5"	400	73°	562	95	69°	485	43	1073.4	650.3	427	45	398	561
17.5"	440	73°	587.6	100	69°	485	43	1087.4	664.4	427	45	410.9	578.1
19"	480	73°	602	105	69°	485	43	1098.1	675	427	45	425.7	583.4
20.5"	520	73°	617	110	69°	485	43	1113.5	690.3	427	45	437.8	598

[Back to Index](#)

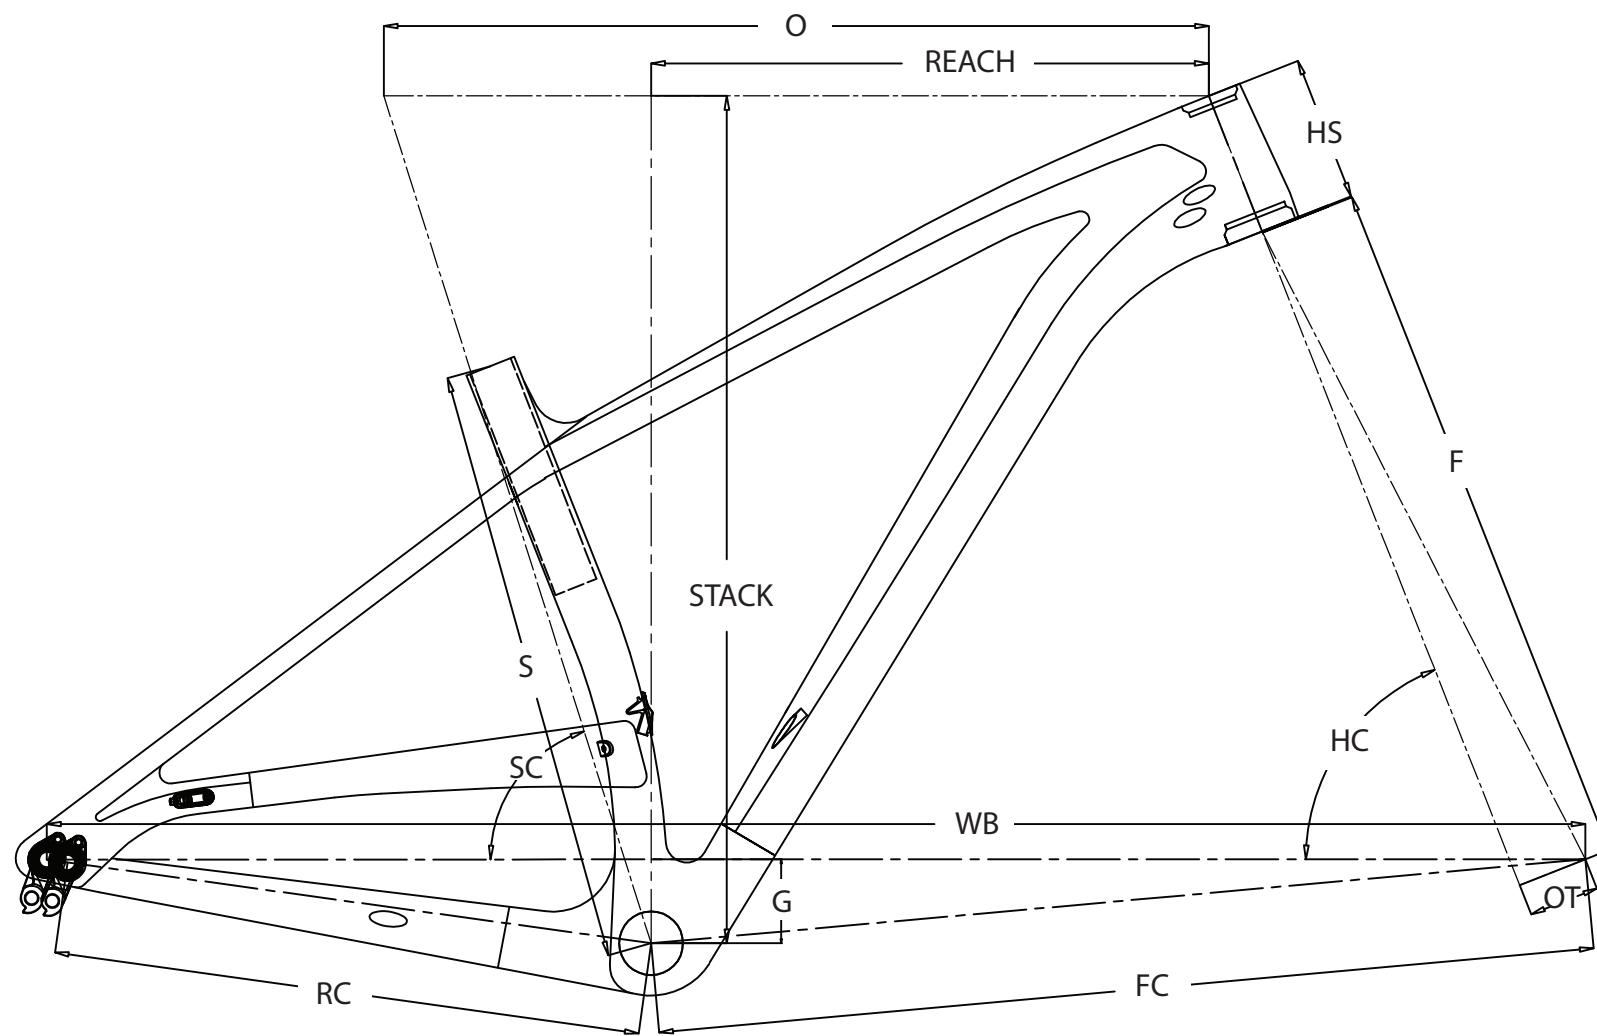
PHAETON 650B PLUS (Length: mm/ Angle: °)

SIZE	S	SP	SC	SL	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15.5"	395	341	72.5°	110.8	580	555	100	69.5°	506	45	1077.4	644.3	440	60	387	612
17.5"	440	385	72.5°	126.6	600	572	105	69.5°	506	45	1097.7	664.5	440	60	405	618
19"	483	431.3	72.5°	140.4	620	584.7	120	69.5°	506	45	1117.6	684.3	440	60	420	632
21"	533	478.2	72.5°	157.6	640	606.5	130	69.5°	506	45	1139.3	705.7	440	60	438	641

[Back to Index](#)

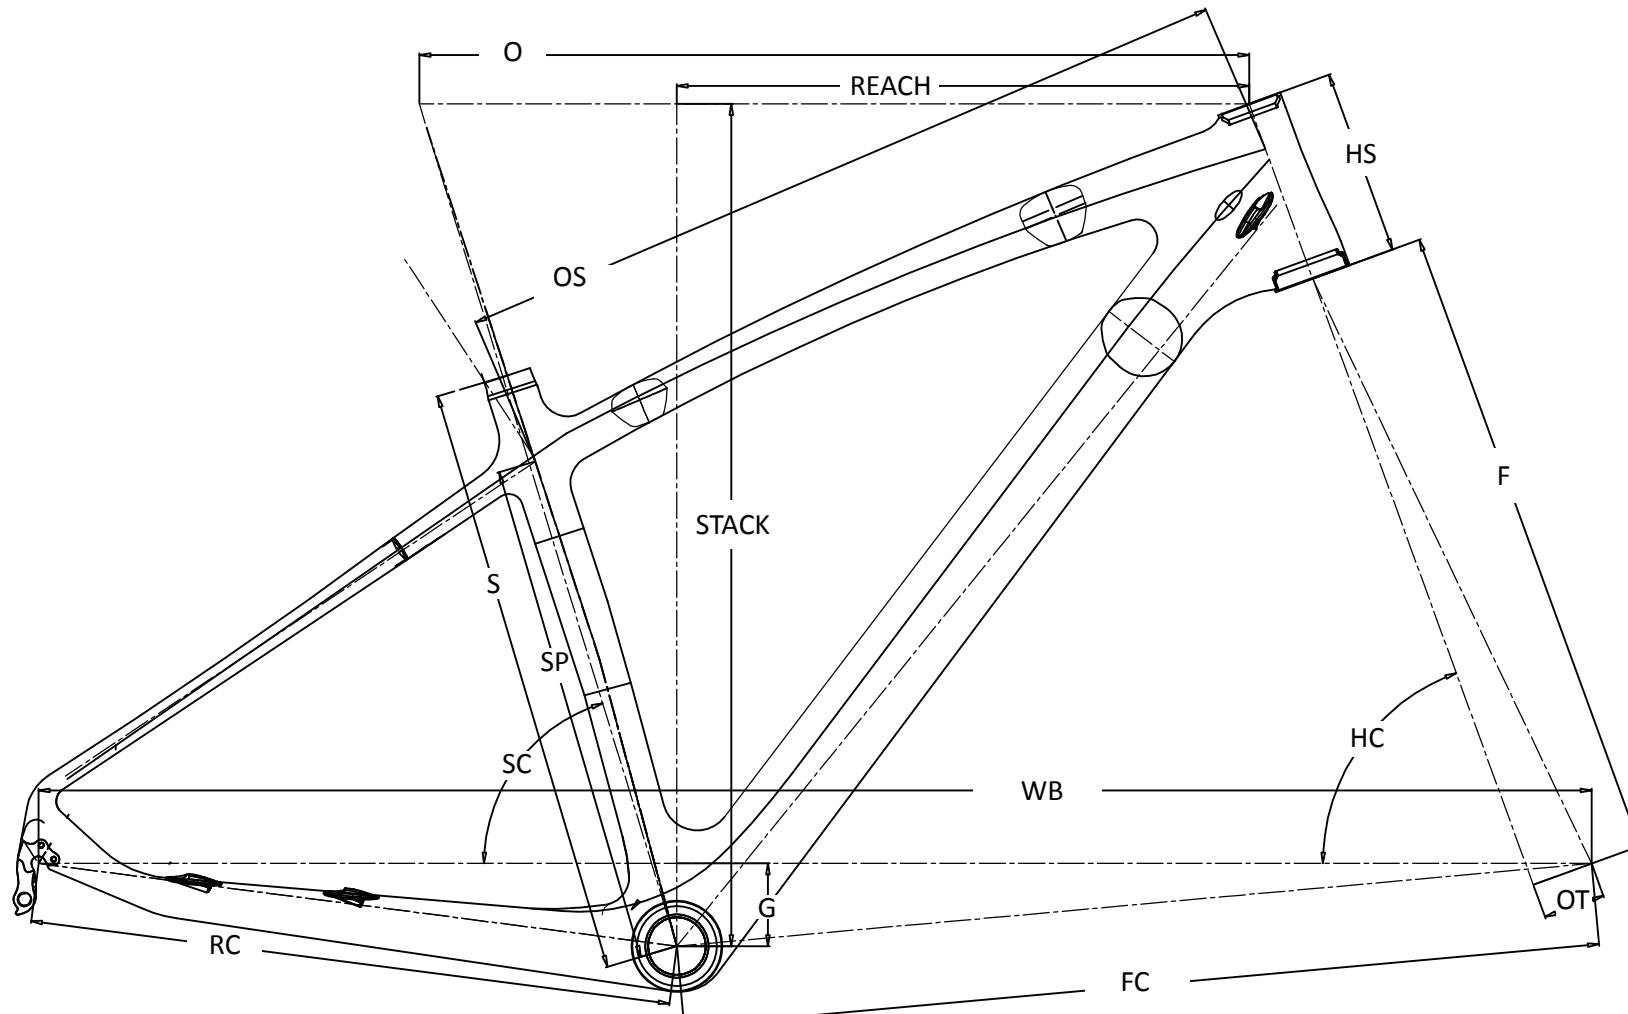
PHAETON 29ER (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15.5"	395	72.5°	580	100	69.5°	506	45	1087.7	644.5	440	60	387.1	612
17.5"	440	72.5°	600	105	69.5°	506	45	1097.7	663.6	440	60	404.3	618
19"	483	72.5°	620	110	69.5°	506	45	1107.7	684.5	440	60	419.8	632
21"	533	72.5°	640	115	69.5°	506	45	1117.7	704.5	440	60	438	640.8

[Back to Index](#)

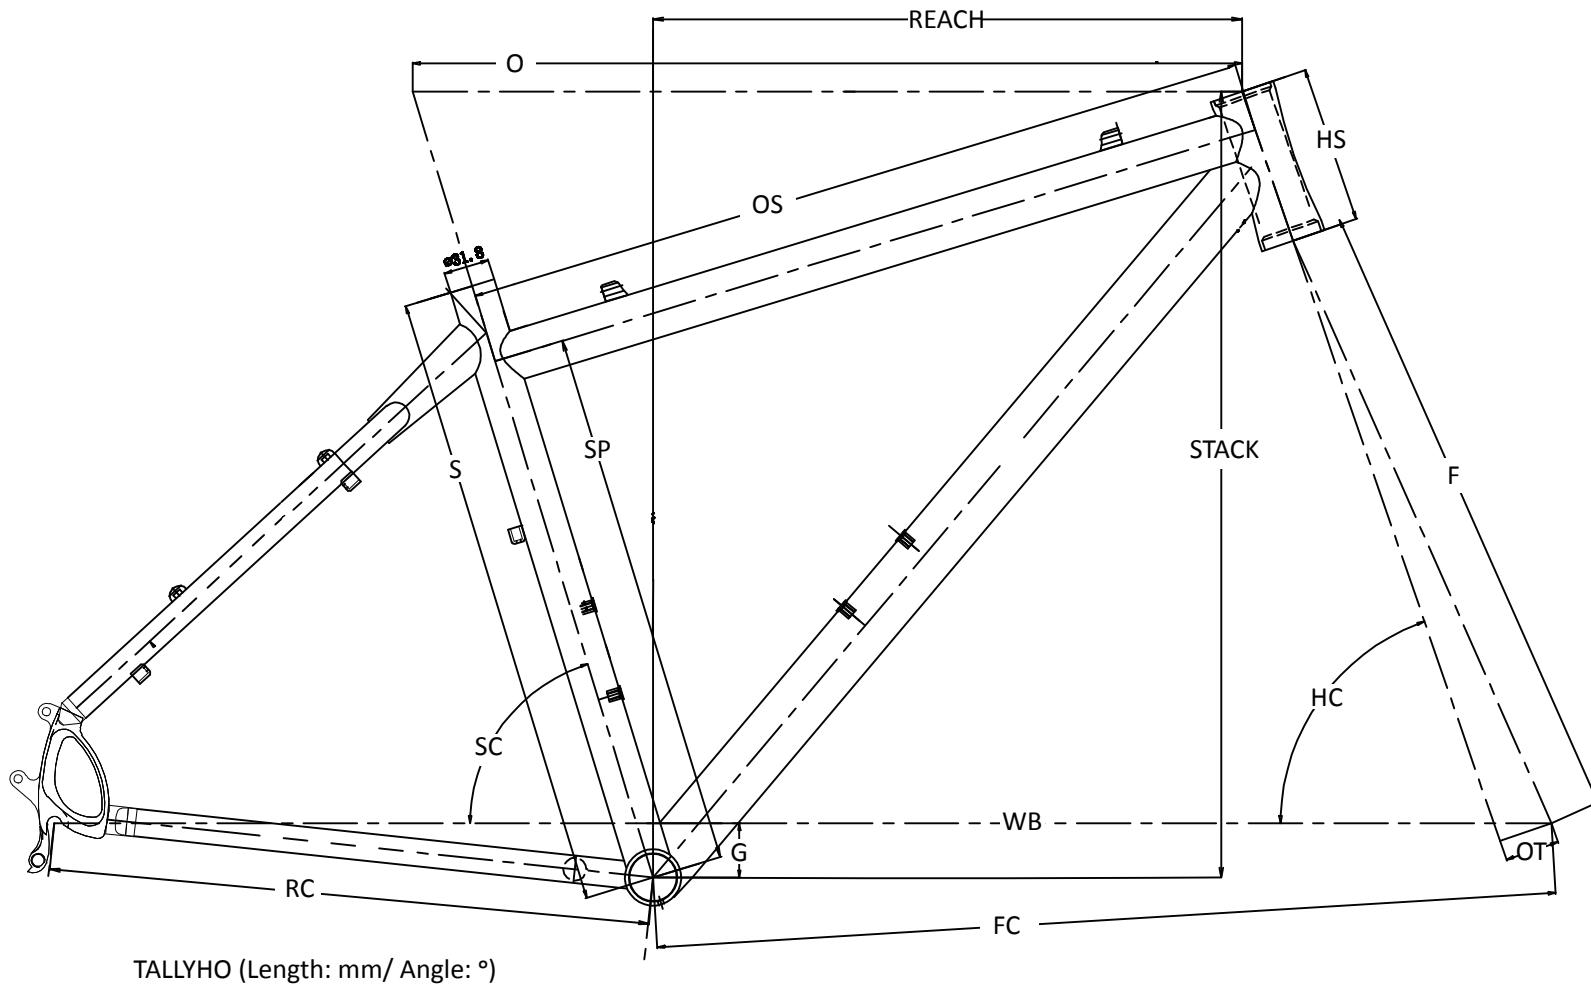
PHANTOM (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
17"	432	72.5°	595	105	68.5°	506	51	1109.8	676.7	425	60	402.3	611.3
19"	483	115°	617	110	68.5°	506	51	1131.8	698.6	425	60	422.4	616
21"	533	125°	639	115	68.5°	506	51	1154.6	721.3	425	60	443.3	620.7

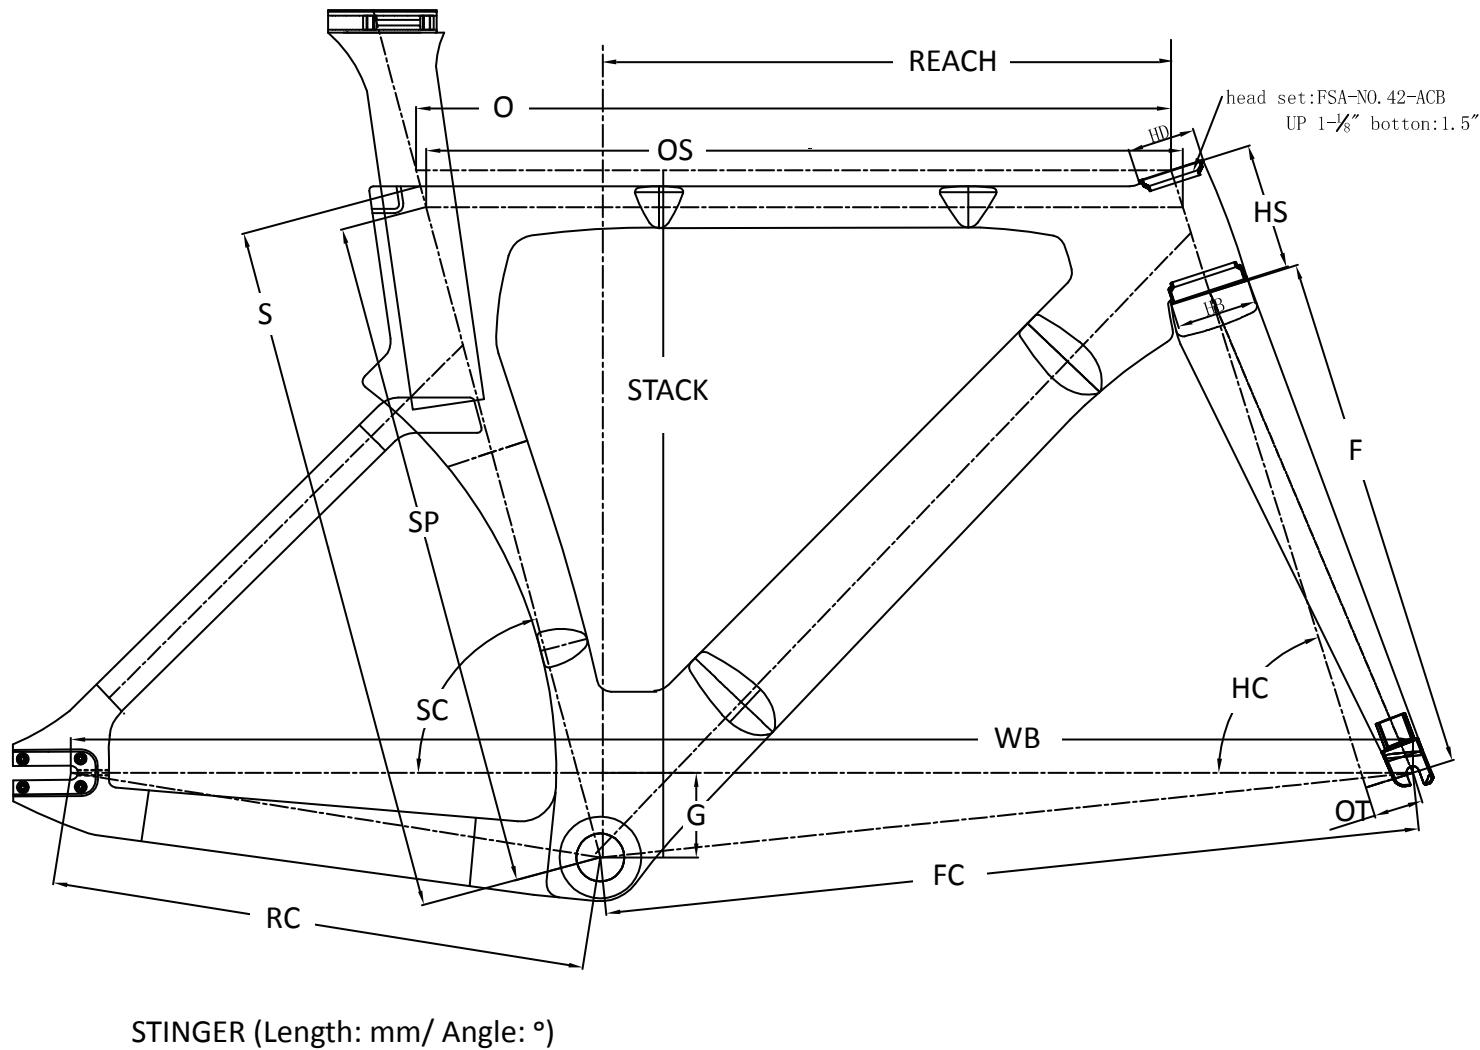


ARTIC (Length: mm/ Angle: °)

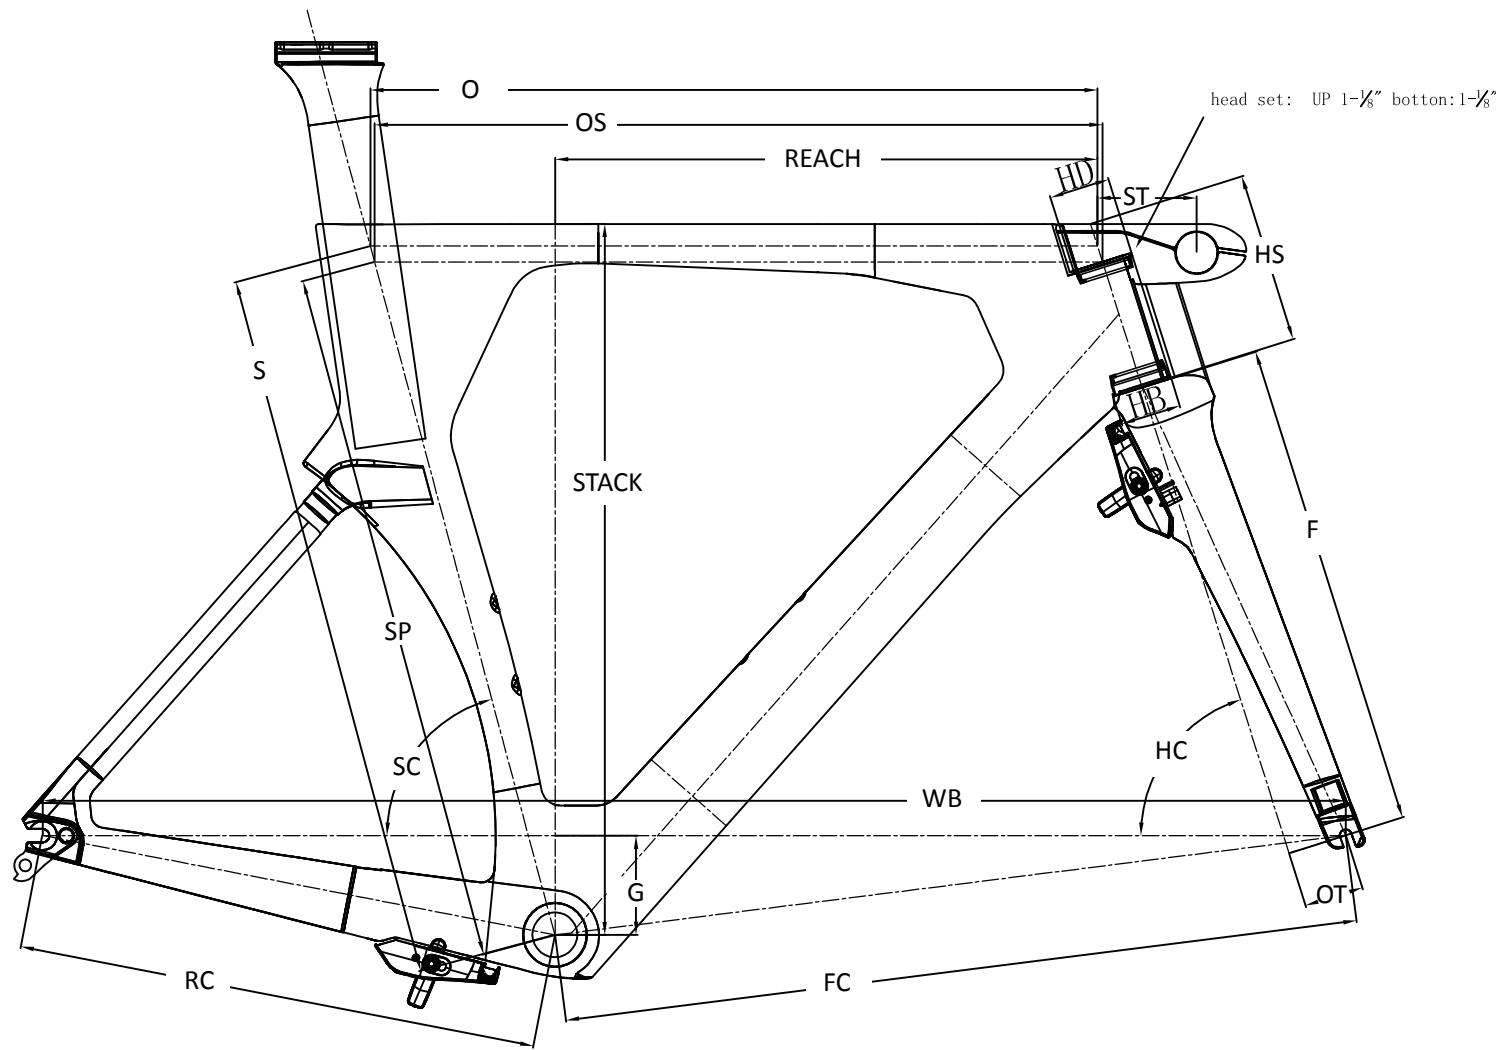
SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15"	381	316	67.5°	583	562.1	115	69.5°	468	45	1112	651.6	467	60	401.9	590.3
17"	432	366.4	67.5°	602	576.4	135	70°	468	45	1126.8	666.4	467	60	415.2	611.2
19"	483	416.5	67.5°	622	597	155	70°	468	45	1148	687.5	467	60	429.5	630
21"	533	466	67.5°	640	611.6	175	70°	468	45	1167	706.4	467	60	441.6	648.8

[Back to Index](#)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
15"	381	326	73°	538.6	520	110	71°	445	38	1005.1	588.1	420	38	370.8	548.9
17"	432	377	73°	579	554.7	110	71°	445	38	1045.5	628.4	420	38	411.2	548.9
19"	483	428	73°	598	576	110	71°	445	38	1064.5	647.4	420	38	430.2	548.9
21"	533	478	73°	608.3	591.3	125	71°	445	38	1075.3	658.2	420	38	436.1	563.1

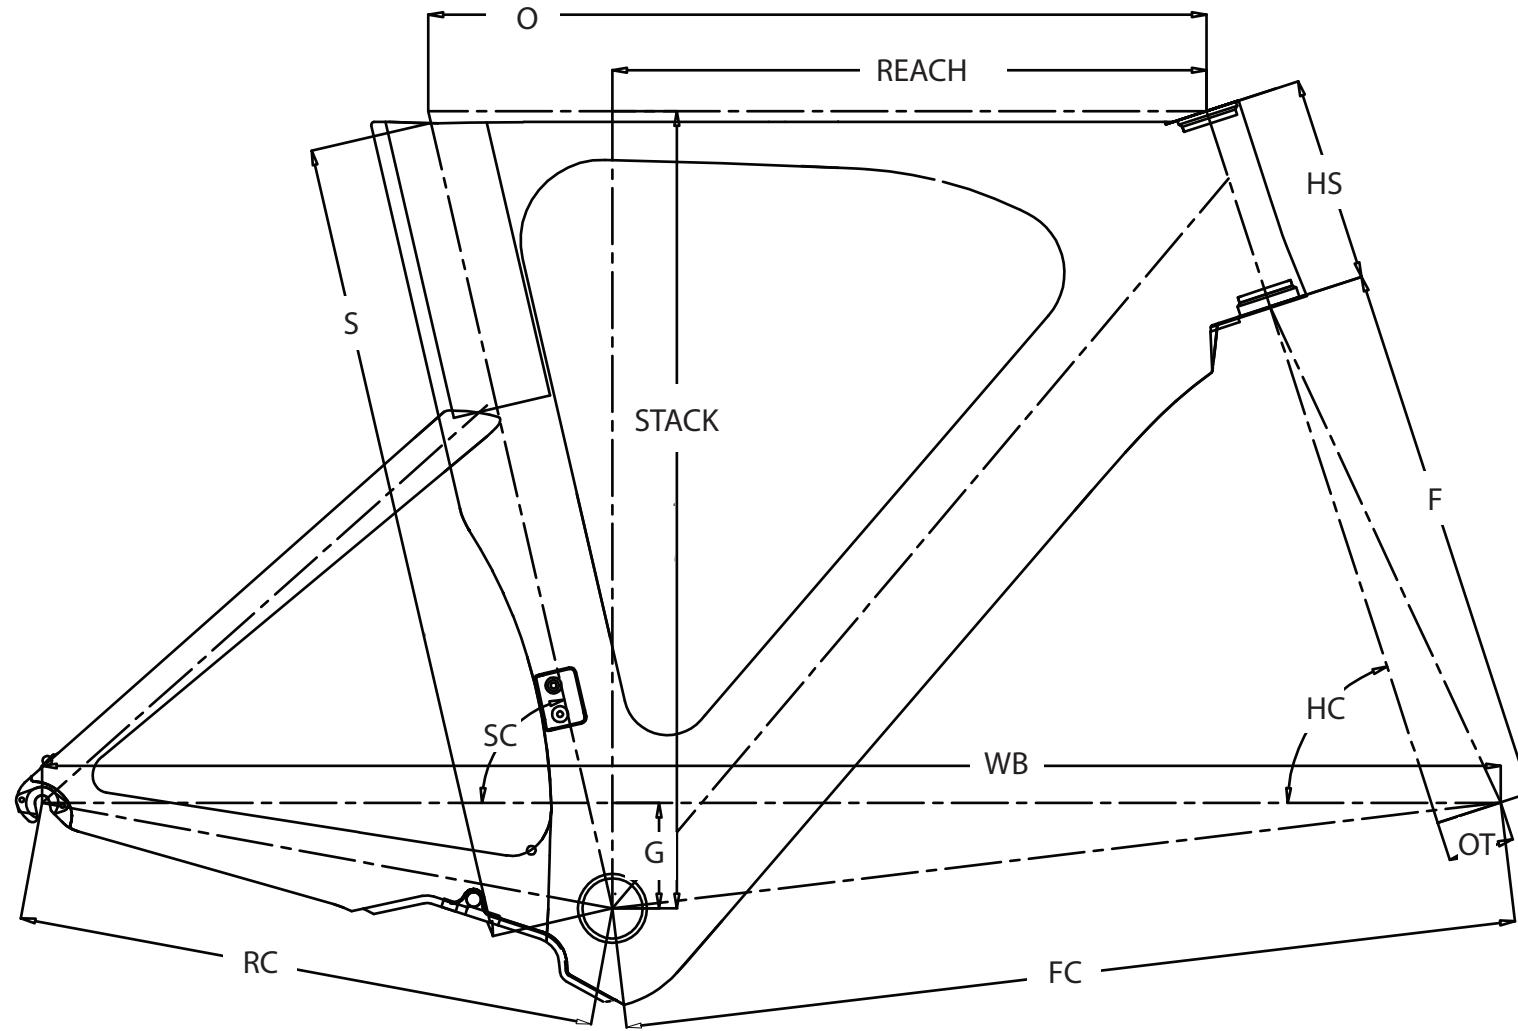


SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack	HD	HB
490	498	473	75°	516	517	85	72.5°	368	35	932	560	380	60	386.8	471.1	48	57
510	505	477.5	75°	535	536	90	72.5°	368	35	951	579	380	60	404.5	487.1	48	57
540	520	492	75°	557	558	105	72.5°	368	35	974	601.5	380	60	422.6	501.4	48	57
560	539	512	75°	573	574	125	72.5°	368	35	991	618	380	60	433.5	509.3	48	57

[Back to Index](#)

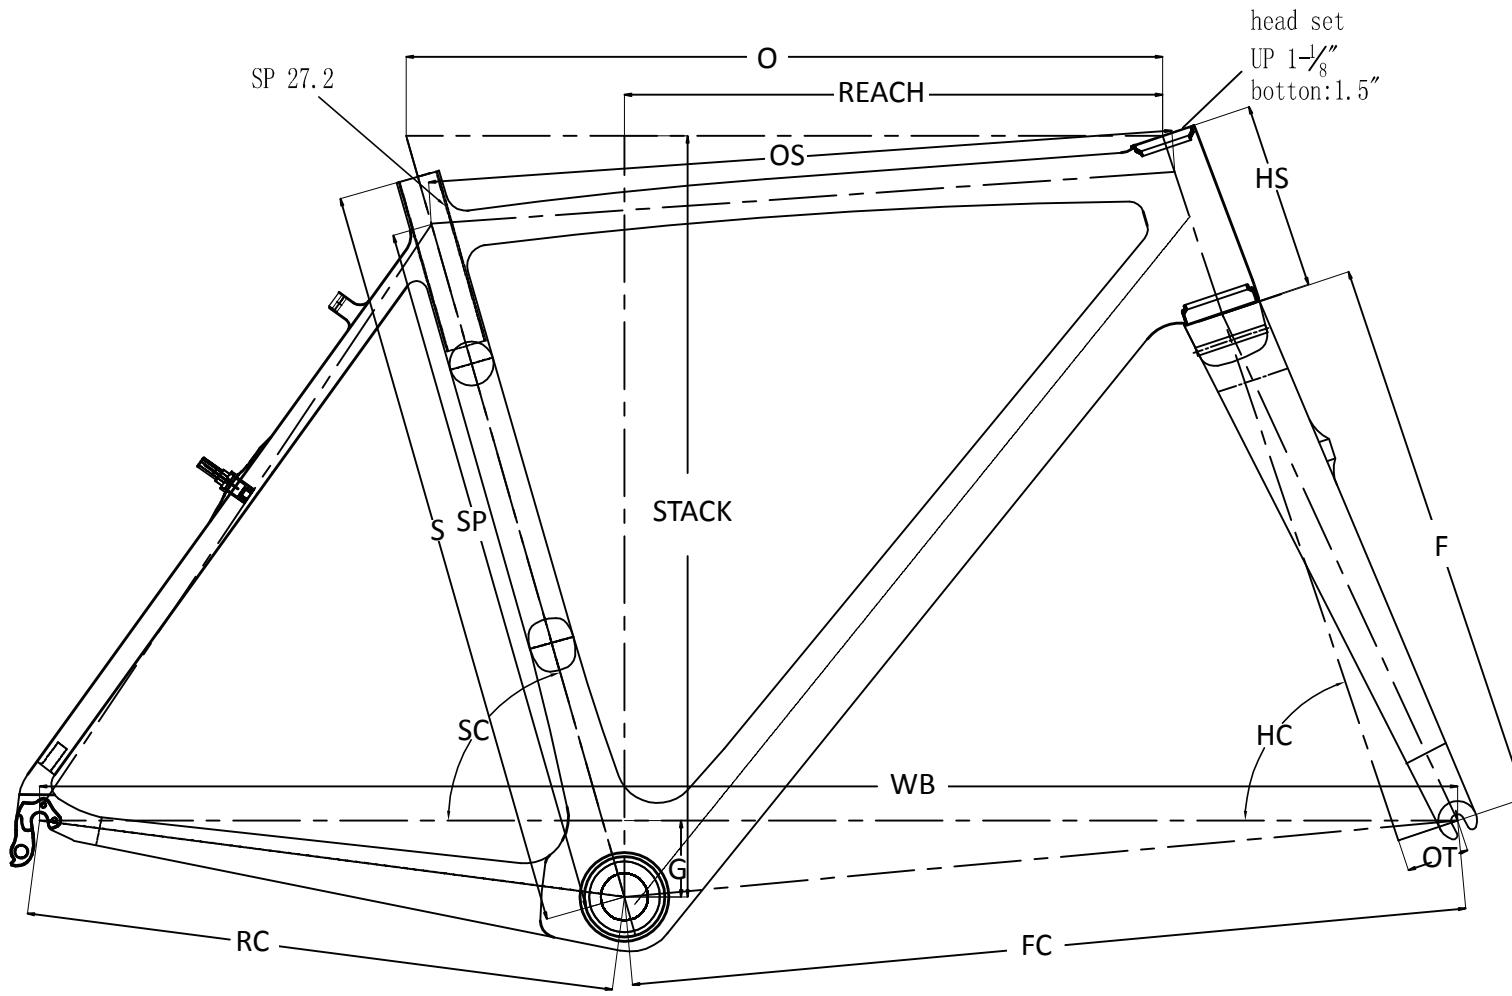
SPRINT-2 (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack	HD	HB	ST
450	450	435	75°	490	488	91.5	71°	370	45	945.5	562.5	395	75	372.5	453.5	46	46	75
490	515	500	75°	511	511.5	101.5	72.5°	370	45	945.5	562.8	395	75	378	512	46	46	75
520	525	510	75°	531.5	532	111.5	72.5°	370	45	967	584	395	75	396	521.5	46	46	75
540	542	527	75°	550.5	551	129.5	72.5°	370	45	986.5	603.5	395	75	410	538	46	46	75
560	561	546	75°	569	569.5	148	72.5°	370	45	1006	622.5	395	75	424	556	46	46	75

[Back to Index](#)

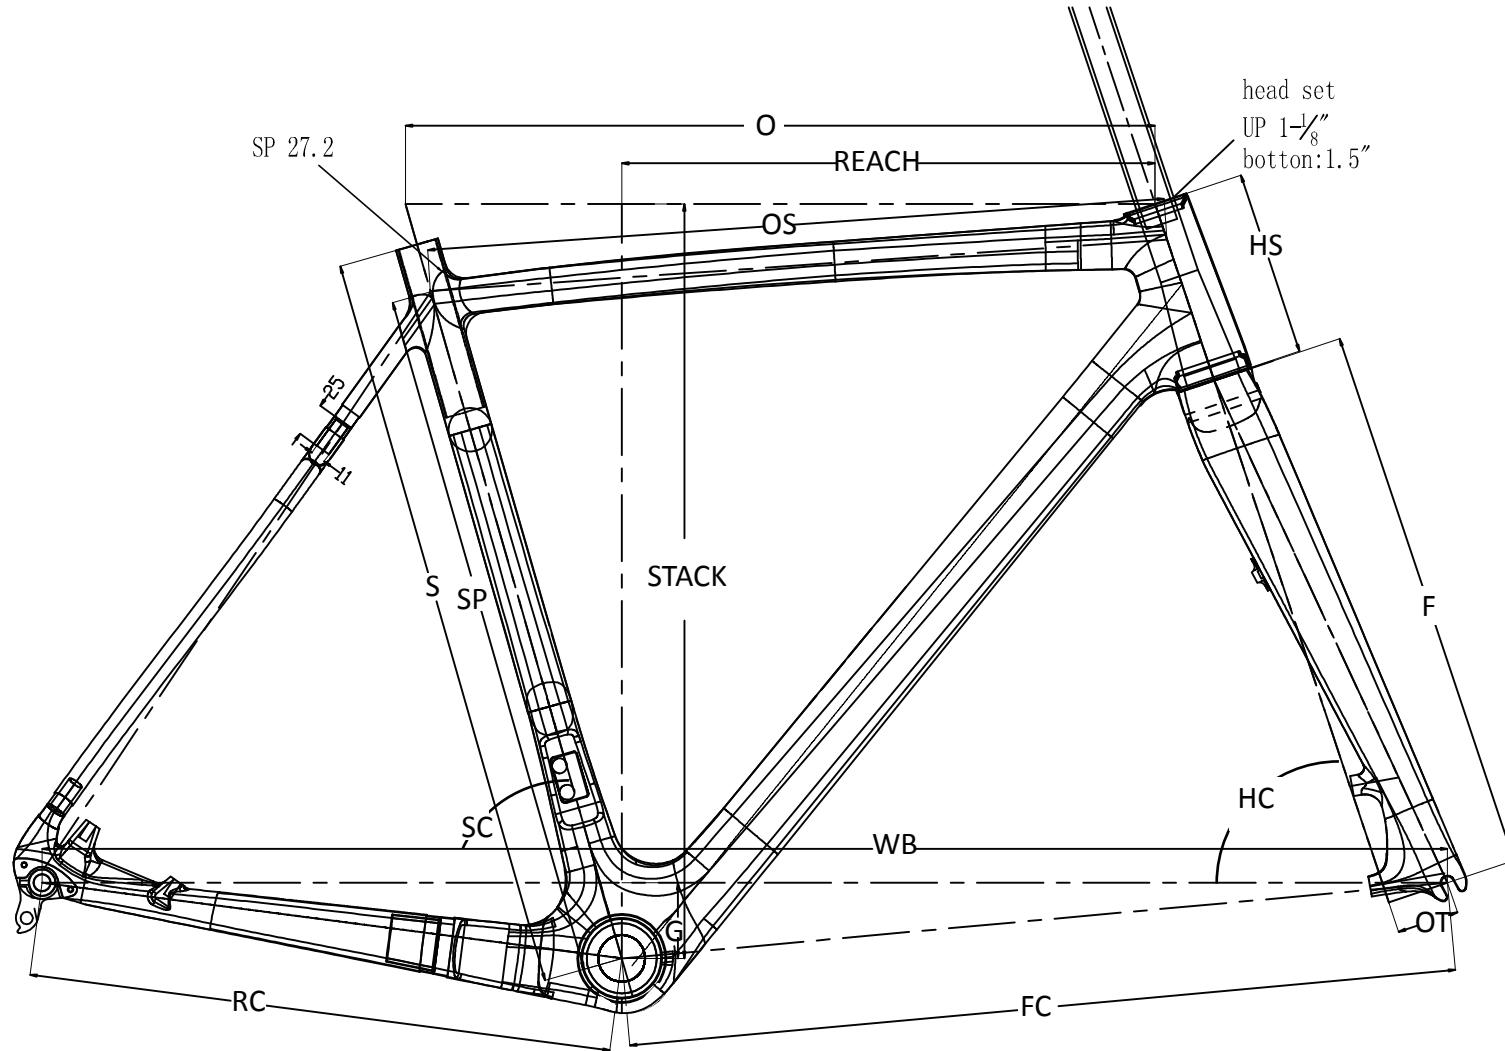
TRIDENT (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
505	505	77°	480	100	70.3°	370	45	954.3	570.5	395	72	364.8	499.2
525	525	77°	505	115	71.5°	370	45	970.4	586.5	395	72	385.5	517.7
549	549	77°	530	140	72°	370	45	993.3	609.2	395	72	404.6	543.1
577	577	77°	560	165	72.5°	370	45	1020.8	636.5	395	72	428.7	568.7
600	600	77°	585	190	72.5°	370	45	1048	663.5	395	72	448	592.6

[Back to Index](#)

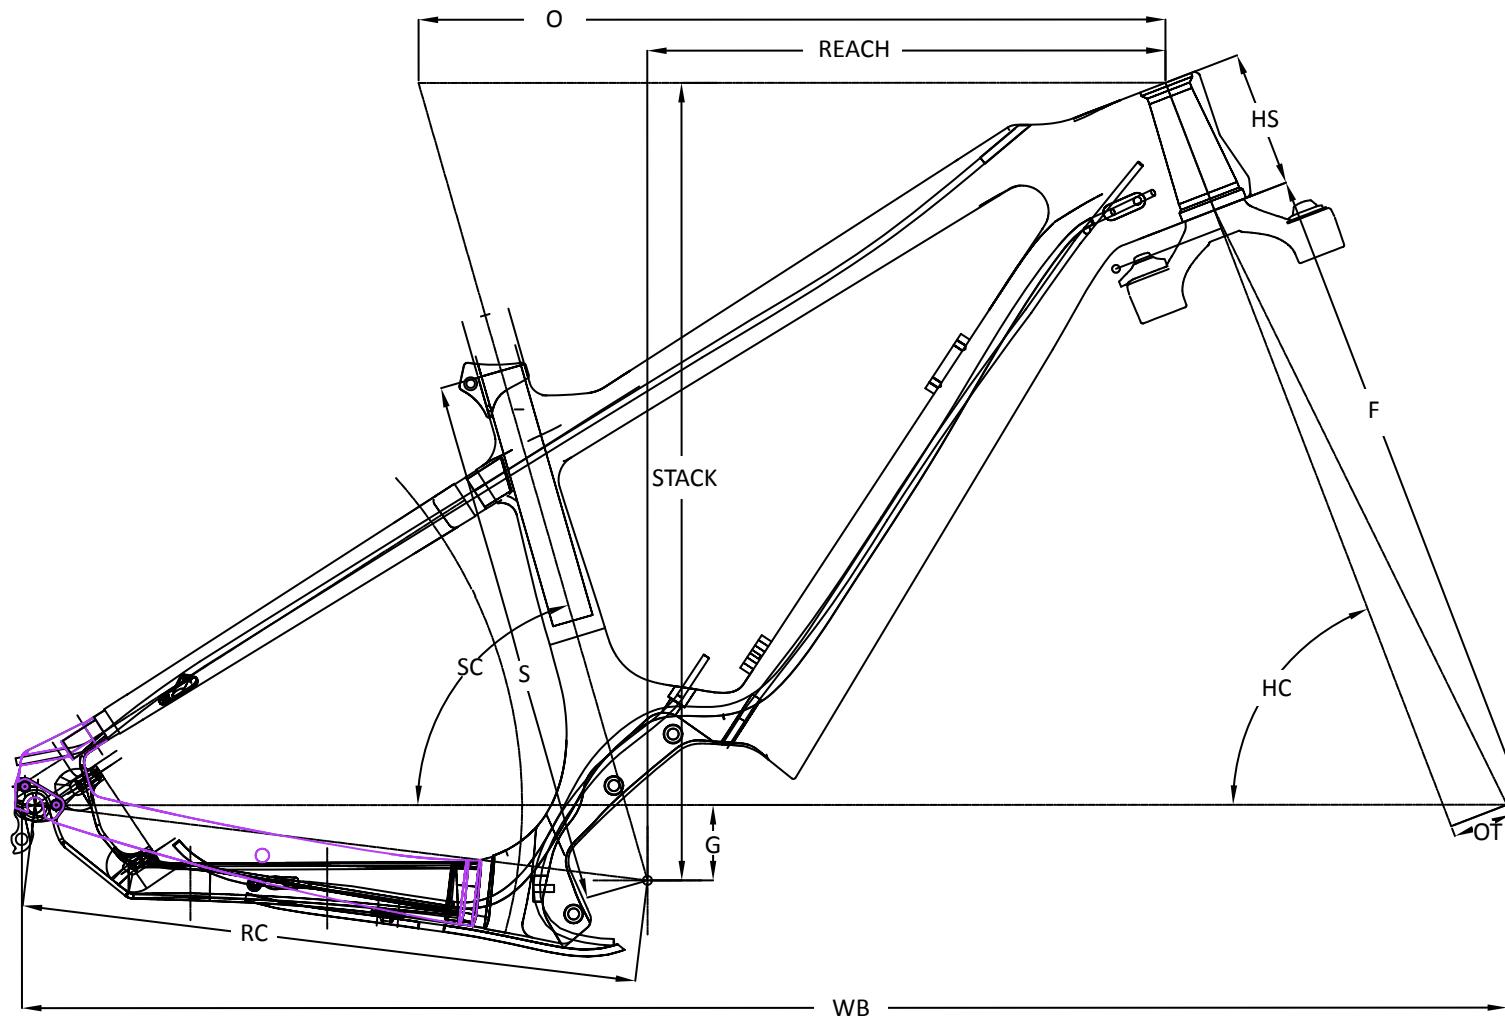
CCX PRO (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
480	480	445	75.5°	510	501.4	100	70.5°	400	45	1009.4	590	425	53	378	510
500	500	465	75°	525	516.3	115	70.5°	400	45	1020.8	601.5	425	53	384.5	524
520	520	485	74.5°	535	526.2	125	71°	400	45	1021.1	602.2	425	55	386	537.5
540	540	505	74°	545	536.8	135	71.5°	400	45	1021.7	602.8	425	55	387.5	548.5
560	560	525	73.5°	560	552.2	145	72°	400	45	1026.6	607.6	425	57	393.5	562.5
580	580	545	73°	575	566.8	160	72.5°	400	45	1030.9	612.4	425	57	398	578.5

[Back to Index](#)

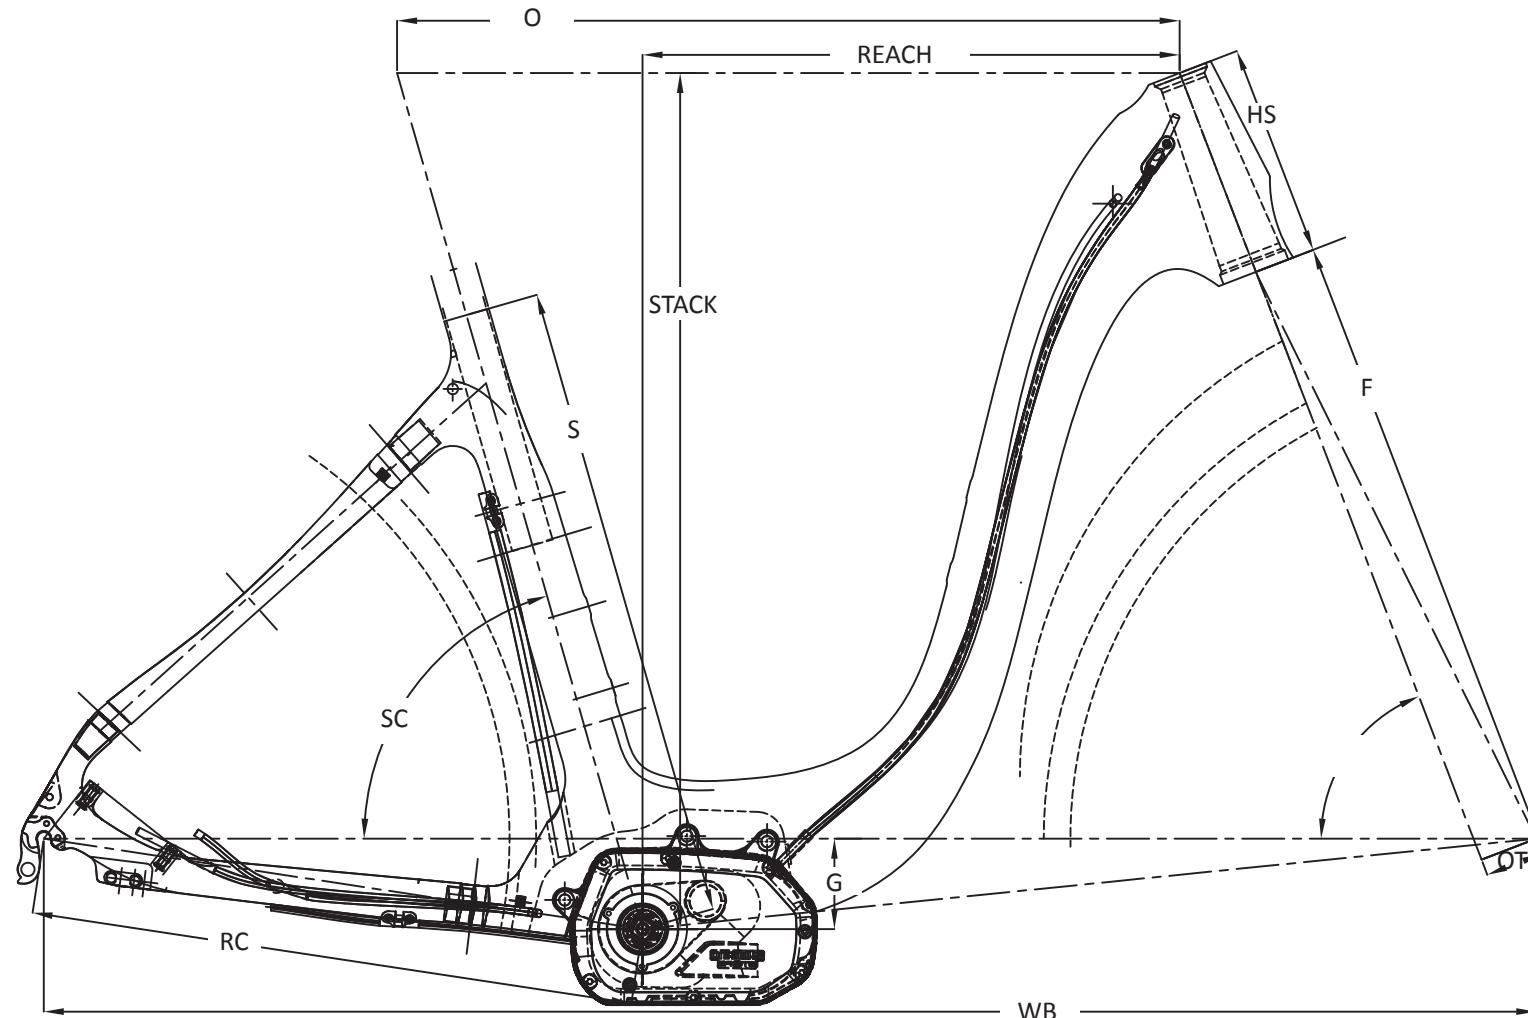
CCX PRO D (Length: mm/ Angle: °)

SIZE	S	SP	SC	O	OS	HS	HC	F	OT	WB	FC	RC	G	Reach	Stack
480	480	445	75.5°	510	501.4	100	70.5°	400	45	1009.4	590	425	53	378	510
500	500	465	75°	525	516.3	115	70.5°	400	45	1020.8	601.5	425	53	384.5	524
520	520	485	74.5°	535	526.2	125	71°	400	45	1021.1	602.2	425	55	386	537.5
540	540	505	74°	545	536.8	135	71.5°	400	45	1021.7	602.8	425	55	387.5	548.5
560	560	525	73.5°	560	552.2	145	72°	400	45	1026.6	607.6	425	57	393.5	562.5
580	580	545	73°	575	566.8	160	72.5°	400	45	1030.9	612.4	425	57	398	578.5

[Back to Index](#)

PINNACLE 29ER (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	RC	G	Reach	Stack
16"	408	74°	575	105	69°	508	46	1143	475	58	399	614
18"	457	73.5°	616	115	70°	508	46	1158	475	58	431	628
20"	508	73°	640	125	71°	508	46	1165	475	58	444	641



PINNACLE URBAN (Length: mm/ Angle: °)

SIZE	S	SC	O	HS	HC	F	OT	WB	RC	G	Reach	Stack
460	460	74.3°	560	150	68.5°	473	44	1101.6	455	68	382.5	631.5
480	480	74°	588	160	69°	473	44	1121	455	68	403.6	643.2
500	500	73.5°	580	170	69.5°	473	44	1102.3	455	68	386	654.9
520	520	73°	590	180	70°	473	44	1100.8	455	68	386.2	666.6

Legends:

S	Seat tube length
SP	Seat tube center to center length
SC	Seat tube angle
O	Horizontal (effective) top tube length
OS	Actual top tube length
HS	Head tube length
HC	Head tube angle
F	Fork length from crown
OT	Fork offset (rake)
WB	Wheelbase
FC	Fork axle to BB center
RC	Chain stay length
G	BB drop