

`

Project : 2 (14-10-2026)

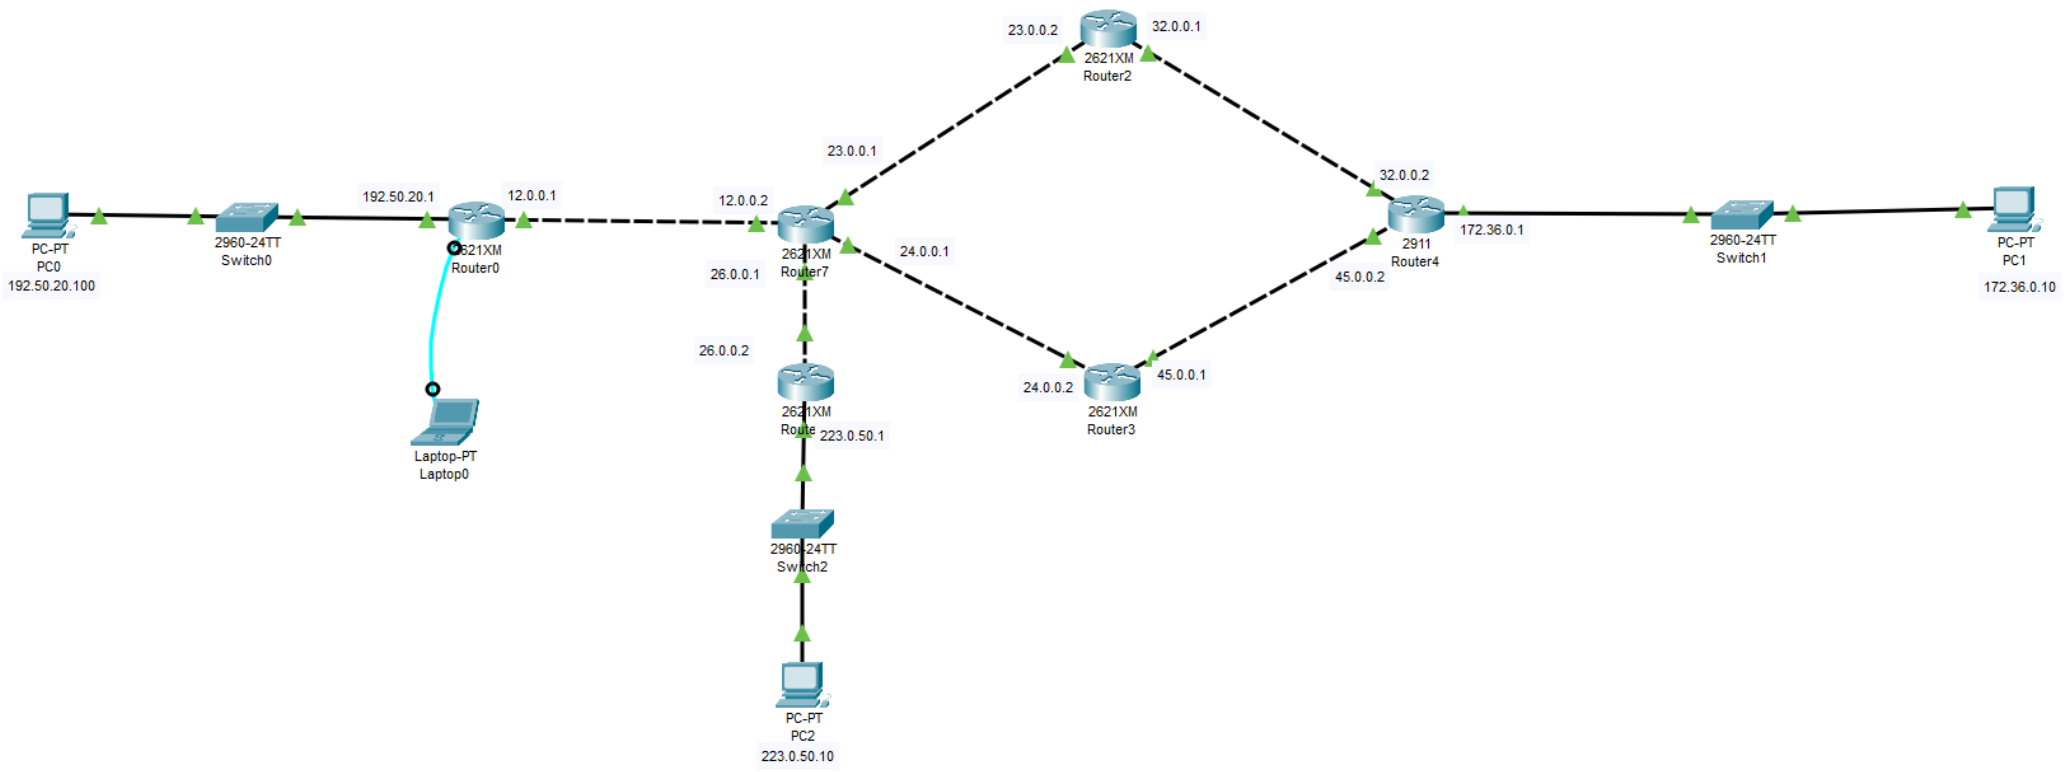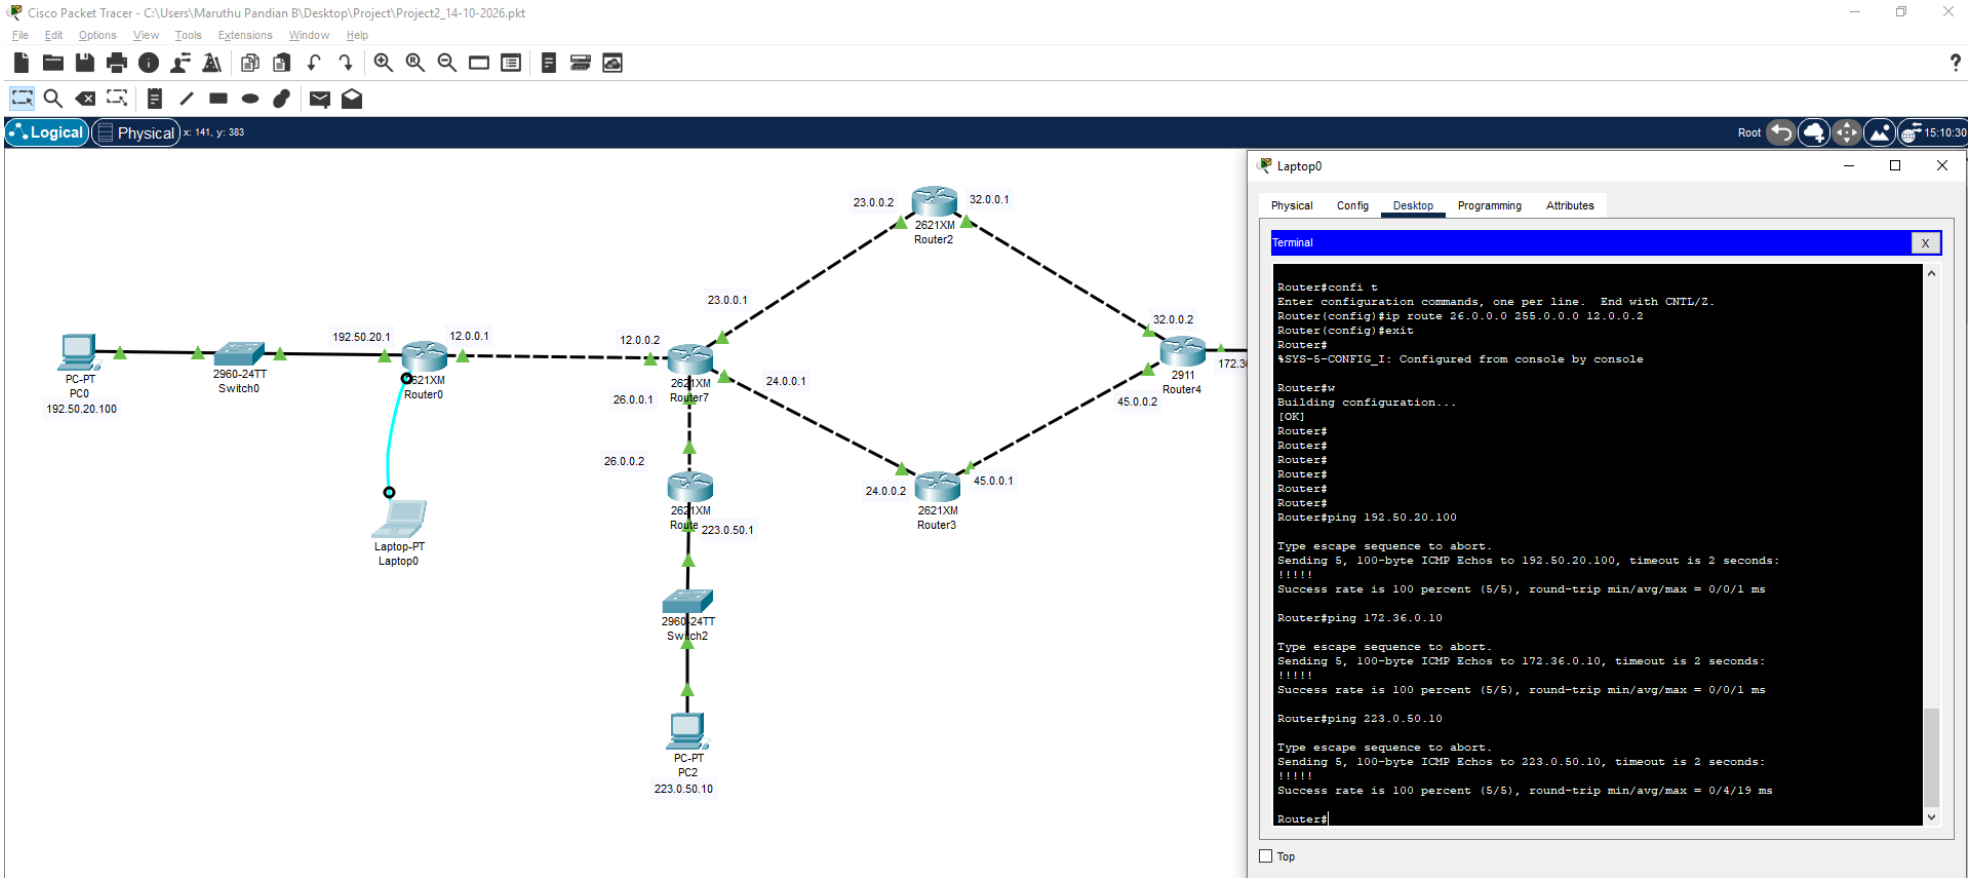


`

Router end:


Cisco Packet Tracer - C:\Users\Maruthu Pandian B\Desktop\Project\Project2_14-10-2026.pkt
File Edit Options View Tools Extensions Window Help
Logical Physical x: 141, y: 383
Root 15:10:30
PC-PT
PC0
192.50.20.100
2960-24TT
Switch0
192.50.20.1
12.0.0.1
2621XM
Router0
12.0.0.2
23.0.0.1
2621XM
Router7
26.0.0.1
24.0.0.1
26.0.0.2
23.0.0.2
2621XM
Router2
32.0.0.1
32.0.0.2
2911
Router4
45.0.0.2
24.0.0.2
2621XM
Router3
45.0.0.1
223.0.50.1
Laptop-PT
Laptop0
2960-24TT
Switch2
PC-PT
PC2
223.0.50.10
Laptop0
Physical Config Desktop Programming Attributes
Terminal
Router$confi t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)$ip route 26.0.0.0 255.0.0.0 12.0.0.2
Router(config)$exit
Router$
%SYS-5-CONFIG_I: Configured from console by console
Router$w
Building configuration...
[OK]
Router$
Router$
Router$
Router$
Router$
Router$
Router$
Router$ping 192.50.20.100
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.50.20.100, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/1 ms
Router$ping 172.36.0.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 172.36.0.10, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/1 ms
Router$ping 223.0.50.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 223.0.50.10, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/4/19 ms
Router$
Top


`

Machine 1 end:

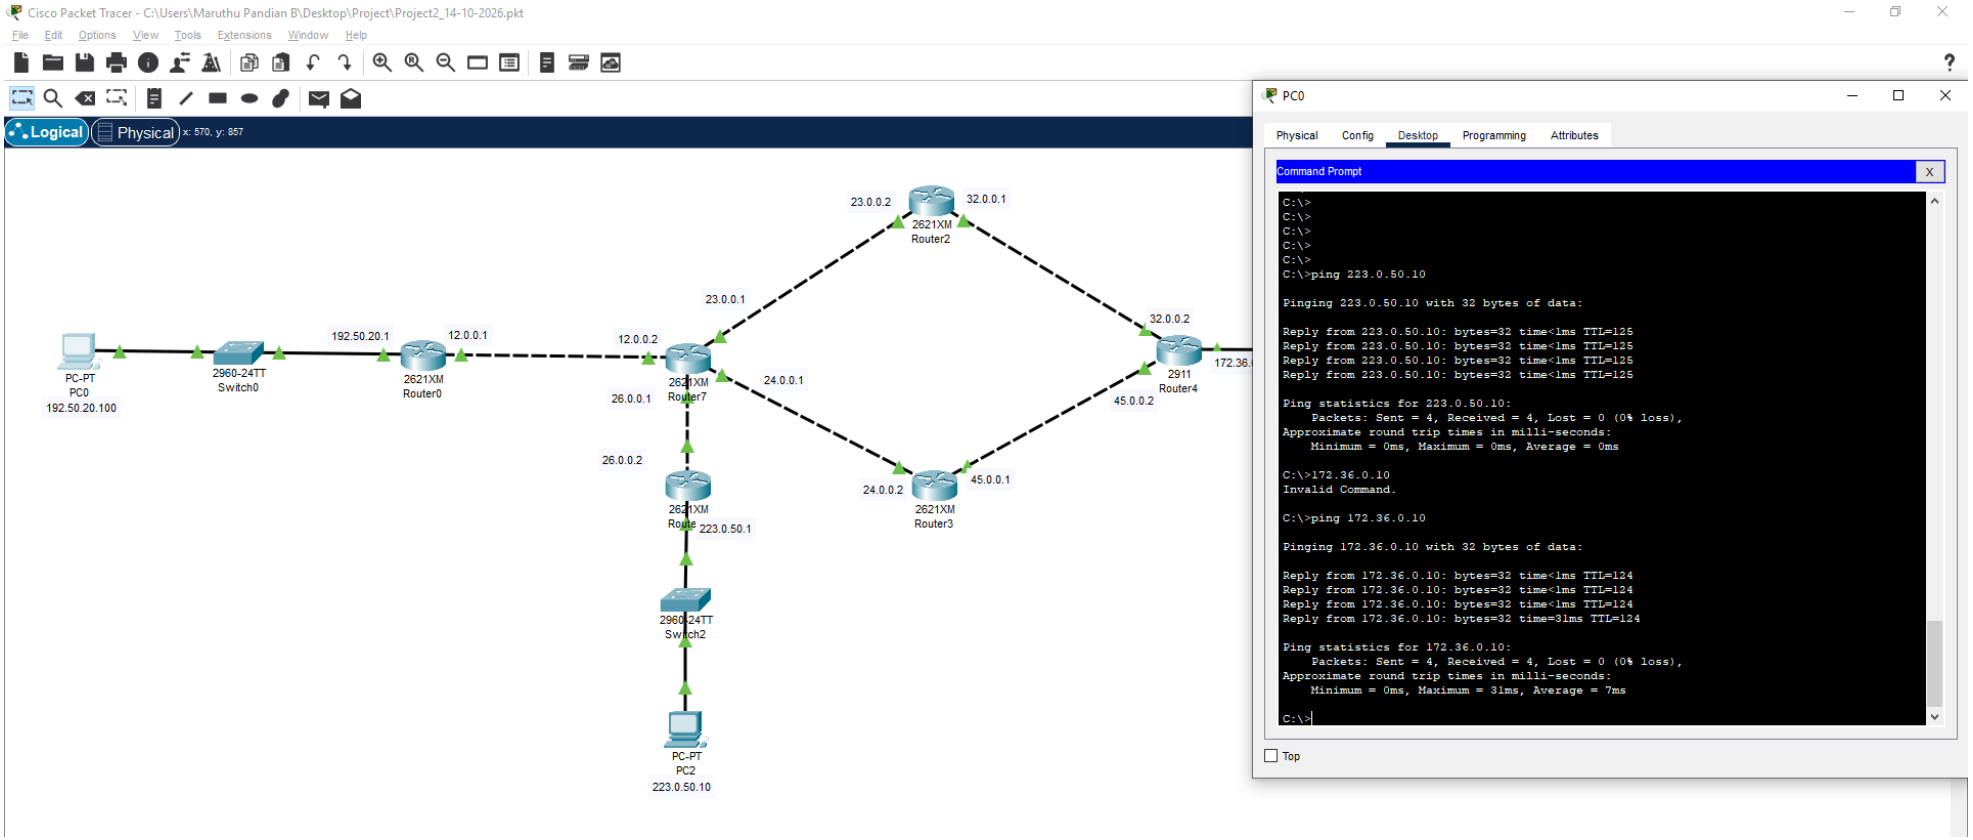

`

Machine 2 end :

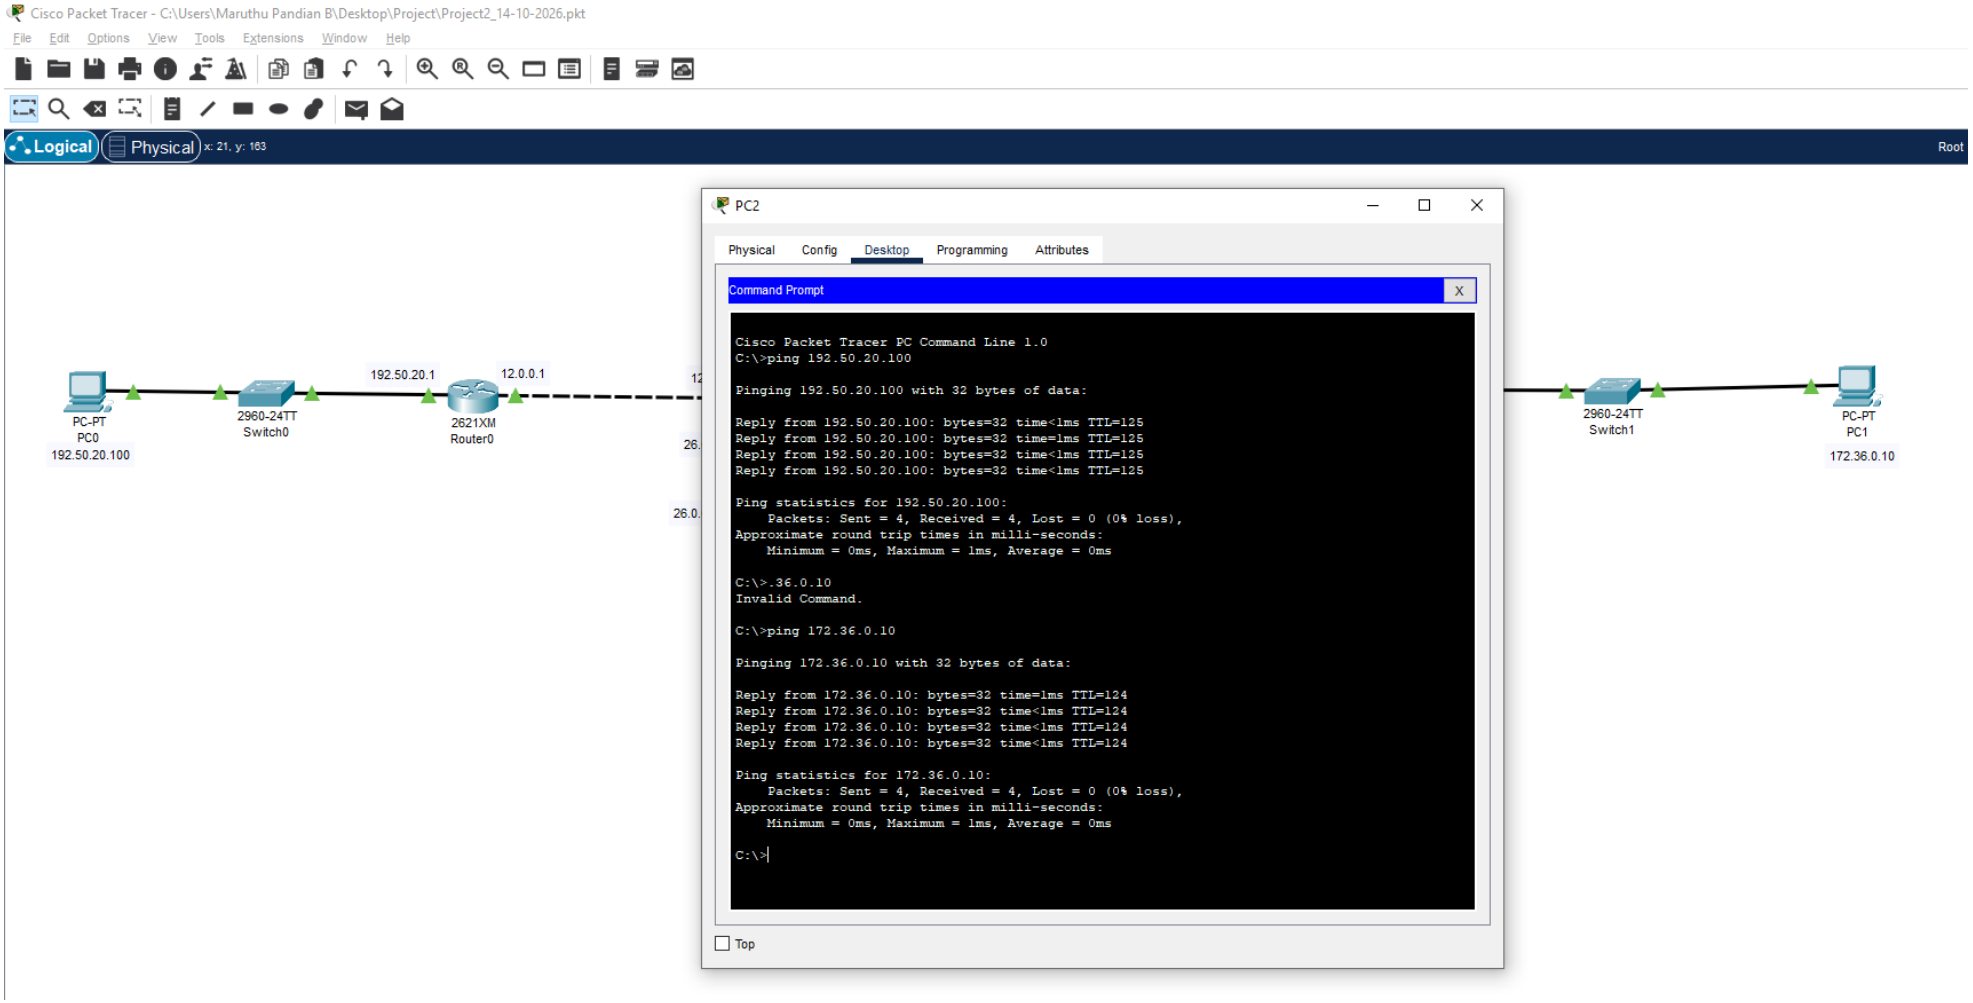

`

Machine 3 end :

