


CYLINDERS

CATALOGUE



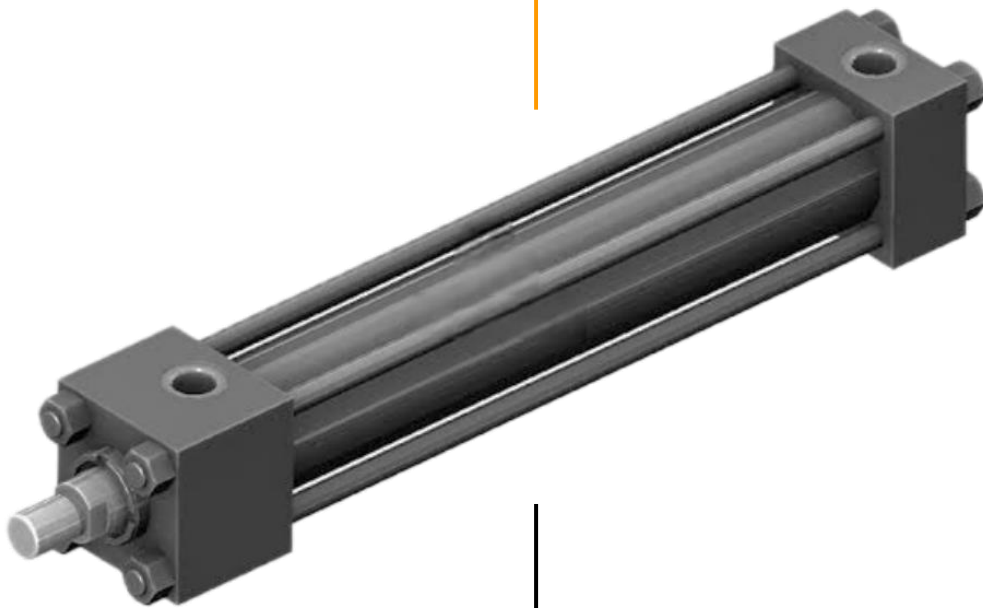

About Us

Maruti Hydraulics is a trusted manufacturer of precision-engineered hydraulic cylinders serving industries such as construction, agriculture, mining, and industrial automation. With years of experience, advanced facilities, and a commitment to quality, we provide reliable solutions for demanding applications.



VISION

“To be the most trusted and innovative provider of hydraulic solutions, driving industrial progress with reliability, sustainability, and excellence.”



MISSION

“To design and deliver world-class hydraulic systems that empower industries with efficiency, durability, and innovation, while building lasting partnerships based on trust and quality service.”



VALUES

Quality First – We are committed to delivering durable and high-performing hydraulic solutions.

Innovation – We continuously improve and adopt new technologies to stay ahead in the industry.

Customer Commitment – We listen, understand, and provide customized solutions that add real value.

Integrity & Trust – We believe in honest, transparent, and ethical business practices.

Sustainability – We strive to design solutions that are efficient, safe, and environmentally responsible.

Excellence in Service – We ensure timely support and long-term reliability for every client.

Teamwork – We grow stronger together by encouraging collaboration, respect, and shared success.

Features

- Cylinders with M.S. end caps in round and square profile and honed tube.
- Long established design, proven ruggedness and reliability.
- PTFE seals and bearing strips ensure perfect sealing and smooth movement.
- Externally removable bolt-on cartridge assembly
- Stroke length offered up to 3500 mm.
- Working pressure up to 200 bar.
- Specials: Bore above dia. 300 mm, LVDT, double ended, stroke adjustable, large ports, working pressure up to 345 bar.

Industrial Application

- **Construction** – used for equipment like excavators, cranes and bulldozers to perform action such as lifting, digging and pushing also used in road equipment and bricks making machinery.
- **Agriculture** – used in tractors, loaders, balers and harvesters to manage farm machinery.
- **Manufacturing** – used in industrial presses for metal forming and punching, injection molding machine for plastic and various automated assembly lines.
- **Material handling** – used in forklift and conveyors systems for lifting and moving goods.
- **Automotive** – Power car lifts in garages and used in manufacturing of vehicles.

Product Range

- Tie-rod Cylinders
- Welded Cylinders
- Telescopic Cylinders
- Mill-type Cylinders
- Custom-designed Cylinders

Specifications

Bore Dia.	40 mm to 300 mm
Rode Dia.	25 mm to 200 mm
Stroke Length	Up to 2000 mm
Medium	Mineral oil (ISO VG 68), water-glycol, fire-resistant fluids
Design	Piston cylinder with cushion/non-cushion version
Pressure range	Up to 3000 psi (200 bar), 345 bar on request
Temperature range	-10 °C to 60 °C, up to 150 °C with Viton seals
Seals	PTFE, NBR, PU, VITON
Construction	End caps - mild steel, Tube – ST-52 seamless honed, Piston rod- EN-8D hard chrome plated, stainless steel (optional), Piston- mild steel, Mountings- mild steel/cast iron

Ordering Code


[MH-WL-100/50-500-200-A-1]

MH-	WL-	100/	50-	500-	200-	A-	1
Company code							
Cylinder Type TR – Tie-rod type WL – Welded type MT – Mill type TL – Telescopic type CS – Custom design							
Bore size From 40 to 300 mm							
Rod size From 25 to 200 mm							
Stroke length Up to 2000 mm							
Max operating pressure 200 Bar (20 Mpa) / [345 Bar (34.5 Mpa) *Special case]							
Mounting style A – Front flange B – Rear flange X – Basic mounting C – Fixed clevis D – Fixed eye E – Fixed eye + spherical bearing/gunmetal bush							
Cushioning 0 – None 1 – Front only 2 – Rear only 3 – Front and rear							

Cylinder Type

TR – Tie-rod type (ISO 6020/2)

Both caps connected with four tie rods it gives more strength and pressure sustainability.

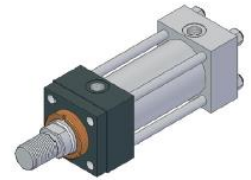

WL – Welded type

In which the tube and end caps are joined permanently with welding. This construction method eliminates the need for tie rods, making it robust and capable of withstanding higher pressures and heavier loads.



MT – Mill type

In which bolted flange construction that is built to withstand extreme shock loads, high temperatures, and continuous operation.



TL – Telescopic type

A telescopic hydraulic cylinder, also called a multi-stage cylinder, is a linear actuator with a series of nested steel tubes, or "stages," that extend sequentially to provide a much longer stroke than a conventional single-stage cylinder.




CS – Custom design

We specialize in the design and manufacturing of custom hydraulic cylinders for a wide range of industrial application.

Mounting style


A – Front flange

Cylinder mounting on front flange with bolting as per your requirement and this is only available in tie-rod type and mill type cylinder.

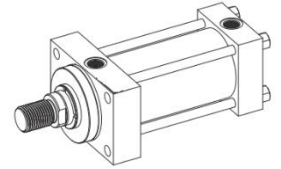


B – Rear flange

Cylinder mounting on rear flange with bolting as per your requirement and this is only available in tie-rod type cylinder and mill type cylinder.

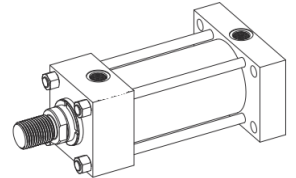


C – fixed clevis

Cylinder mounting on clevis with pivot pin and this is available in all type of cylinder.

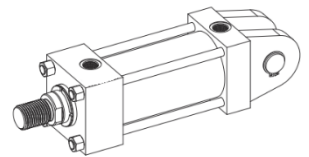


D – fixed eye

Cylinder mounting on eye with pivot pin same as clevis and this is available in all type of cylinder.

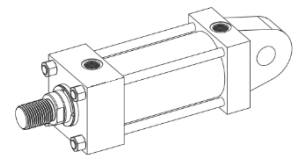

E – fixed eye + spherical bearing/gunmetal bush

Cylinder mounting on eye with pivot pin in between spherical bearing/gunmetal bush to be used as per customer requirement and this is available in all type of cylinder.

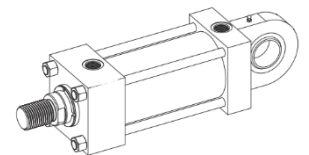

Call - +91 97371 13699 / +91 90165 26446

E-mail - marutihydraulics09@gmail.com

Visit - www.marutihydraulics.in

Corporate office - 5thf. Office no. B-524, Pushpak corner opp. navyug school, Naroda Ahmedabad-382345

MH MARUTI HYDRAULICS