

Pinout & Configuration

Clock Configuration

Pr

Software Packs

Pinout

Q



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

✓ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

▲ TIM3

TIM4

Connectivity

CAN

I2C1

✓ I2C2

SPI1

SPI2

GPIO Mode and Configuration

Configuration

Group By Peripherals

● GPIO

● I2C

● RCC

● SYS

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin N...	Signal o...	GPIO ou...	GPIO m...	GPIO Pu...	Maximu...	User Label	Modified
PA4	n/a	n/a	Input mo...	Pull-up	n/a		✓
PA5	n/a	n/a	Input mo...	Pull-up	n/a		✓
PA6	n/a	n/a	Input mo...	Pull-up	n/a		✓
PB0	n/a	Low	Output ...	No pull-u...	Low		✓

PB0 Configuration :

GPIO output level

Low

GPIO mode

Output Push Pull

GPIO Pull-up/Pull-down

No pull-up and no pull-down

Maximum output speed

Low

User Label

مروة الشعير

Pinout & Configuration

Clock Configuration

Software Packs

Pinout

Q 

Categories

A->Z

System Core



DMA

GPIO

IWDG

NVIC

RCC

✓ SYS

WWDG

Analog



Timers



Connectivity



Computing



Middleware and Software Packs



SYS Mode and Configuration

Mode

Debug Serial Wire

☐ System Wake-Up

Timebase Source SysTick



Configuration

Warning: This peripheral has no parameters to be configured.

مروة الشعير

STM32CubeMX Untitled*: STM32F103C8Tx

File Window Help

Home > STM32F103C8Tx > Untitled - Pinout & Configuration

Pinout & Configuration

Categories A-Z

- System Core
 - DMA
 - GPIO
 - IWDG
 - NVIC
 - RCC**
 - SYS
 - WWDG
- Analog >
- Timers >
- Connectivity >
- Computing >
- Middleware and Software Packs >

Clock Configuration

Software Packs Pinout

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Crystal/Ceramic Resonator

Low Speed Clock (LSE) Disable

☐ Master Clock Output

Configuration

Reset Configuration

User Constants NVC Settings GPIO Settings

Parameter Settings

Configure the below parameters :

Search (Ctrl+F)

System Parameters

- VDD voltage (V) 3.3 V
- Prefetch Buffer Enabled
- Flash Latency (WS) 0 WS (1 CPU cycle)

RCC Parameters

- HSI Calibration Value 16
- HSE Startup Timeout Value (ms) 100

مروة الشعير

Pinout & Configuration

Clock Configuration

Software Packs

Pinout

Q



Categories

A->Z

System Core

DMA
GPIO
IWDG
NVIC
✓ RCC
✓ SYS
WWDG

Analog

Timers

RTC
TIM1
TIM2
✓ TIM3
TIM4

Connectivity

Computing

Middleware and Software Packs

TIM3 Mode and Configuration

Mode

Slave Mode

Trigger Source

☒ Internal Clock

Channel1

Channel2

Channel3

Channel4

Combined Channels

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

User Constants

NVIC Settings

DMA Settings

Parameter Settings

Configure the below parameters :

Q Search (Ctrl+F)



Counter Settings

Prescaler (PSC - 16 bits value) 0

Counter Mode Up

Counter Period (AutoReload ...) 65535

Internal Clock Division (CKD) No Division

auto-reload preload Disable

Trigger Output (TRGO) Parameters

مروة الشعير



Pinout & Configuration

Clock Configuration

Software Packs

Pinout

Q



Categories

A->Z

System Core

DMA
GPIO
IWDG
NVIC
✓ RCC
✓ SYS
WWDG

Analog

Timers

RTC
TIM1
TIM2
✓ TIM3
TIM4

Connectivity

Computing

Middleware and Software Packs

TIM3 Mode and Configuration

Mode

Slave Mode

Trigger Source

☒ Internal Clock

Channel1

Channel2

Channel3

Channel4

Combined Channels

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

User Constants

NVIC Settings

DMA Settings

Parameter Settings

Configure the below parameters :

Q Search (Ctrl+F)



Counter Settings

Prescaler (PSC - 16 bits value) 7900

Counter Mode Up

Counter Period (AutoReload ...) 4999

Internal Clock Division (CKD) No Division

auto-reload preload Disable

Trigger Output (TRGO) Parameters



مروة الشعير

Pinout & Configuration

Clock Configuration

Software Packs

Pinout

Q

Categories

A->Z

System Core

DMA
GPIO
IWDG
NVIC
✓ RCC
✓ SYS
WWDG

Analog

Timers

RTC
TIM1
TIM2
✓ TIM3
TIM4

Connectivity

Computing

Middleware and Software Packs

TIM3 Mode and Configuration

Mode

Slave Mode

Trigger Source

☒ Internal Clock

Channel1

Channel2

Channel3

Channel4

Combined Channels

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

User Constants

NVIC Settings

DMA Settings

Parameter Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

مروة الشعير

STM32CubeMX File Window Help

Home > STM32F103C8Tx > Untitled - Pinout & Configuration

Pinout & Configuration

Categories A-Z

System Core

- DMA
- GPIO**
- IWDG
- NVIC
- ✓ RCC
- ✓ SYS
- WWDG

Analog >

Timers

- RTC
- TIM1
- TIM2
- ✓ **TIM3**
- TIM4

Connectivity

- CAN
- I2C1
- ✓ **I2C2**
- SPI1
- SPI2

Clock Configuration

Software Packs Pinout

I2C Mode and Configuration

Mode

I2C I2C

Configuration

Reset Configuration

• NVIC Settings • DMA Settings • GPIO Settings

• **Parameter Settings** • User Constants

Configure the below parameters :

Search (Ctrl+F)


Master Features

- I2C Speed Mode Standard Mode
- I2C Clock Speed (Hz) 100000

Slave Features

- Clock No Stretch Mode Disabled
- Primary Address Length sele... 7-bit
- Dual Address Acknowledged Disabled

مروة الشعير

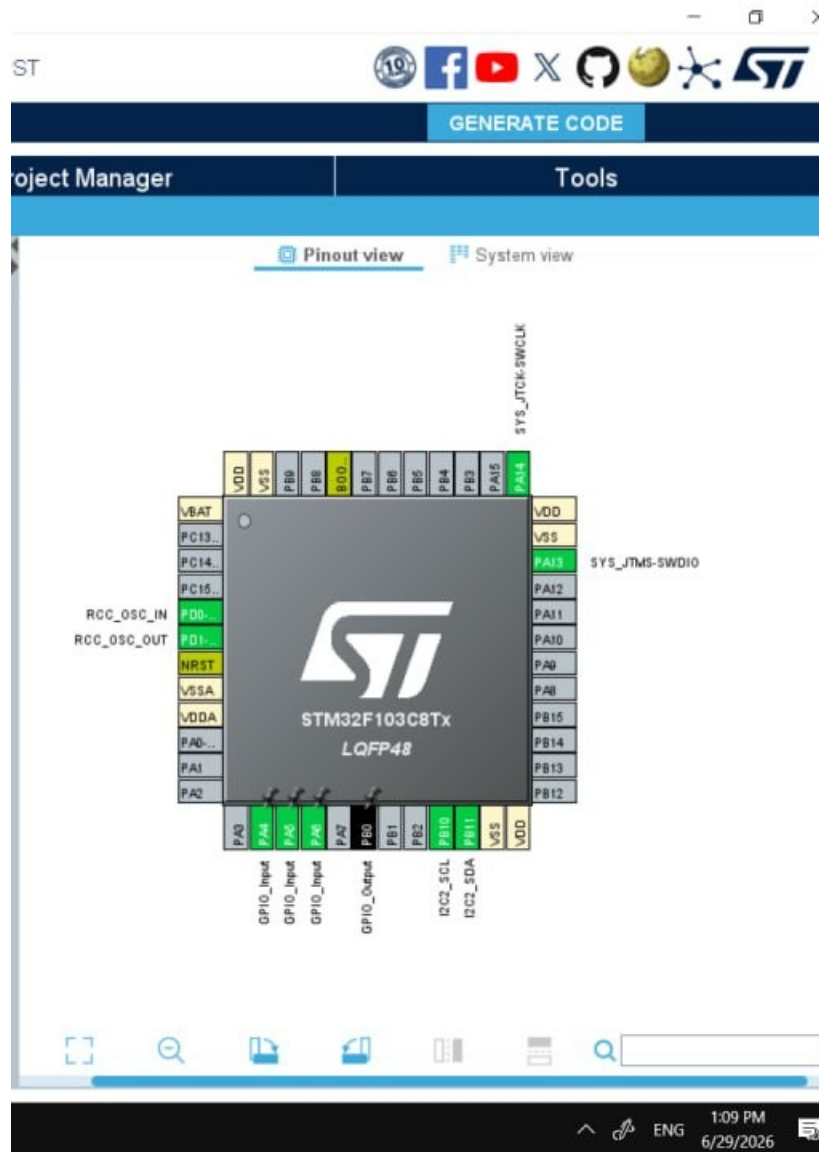


مروة الشعير

Pinout & Configuration

Clock Configuration

Project Manager

Tools

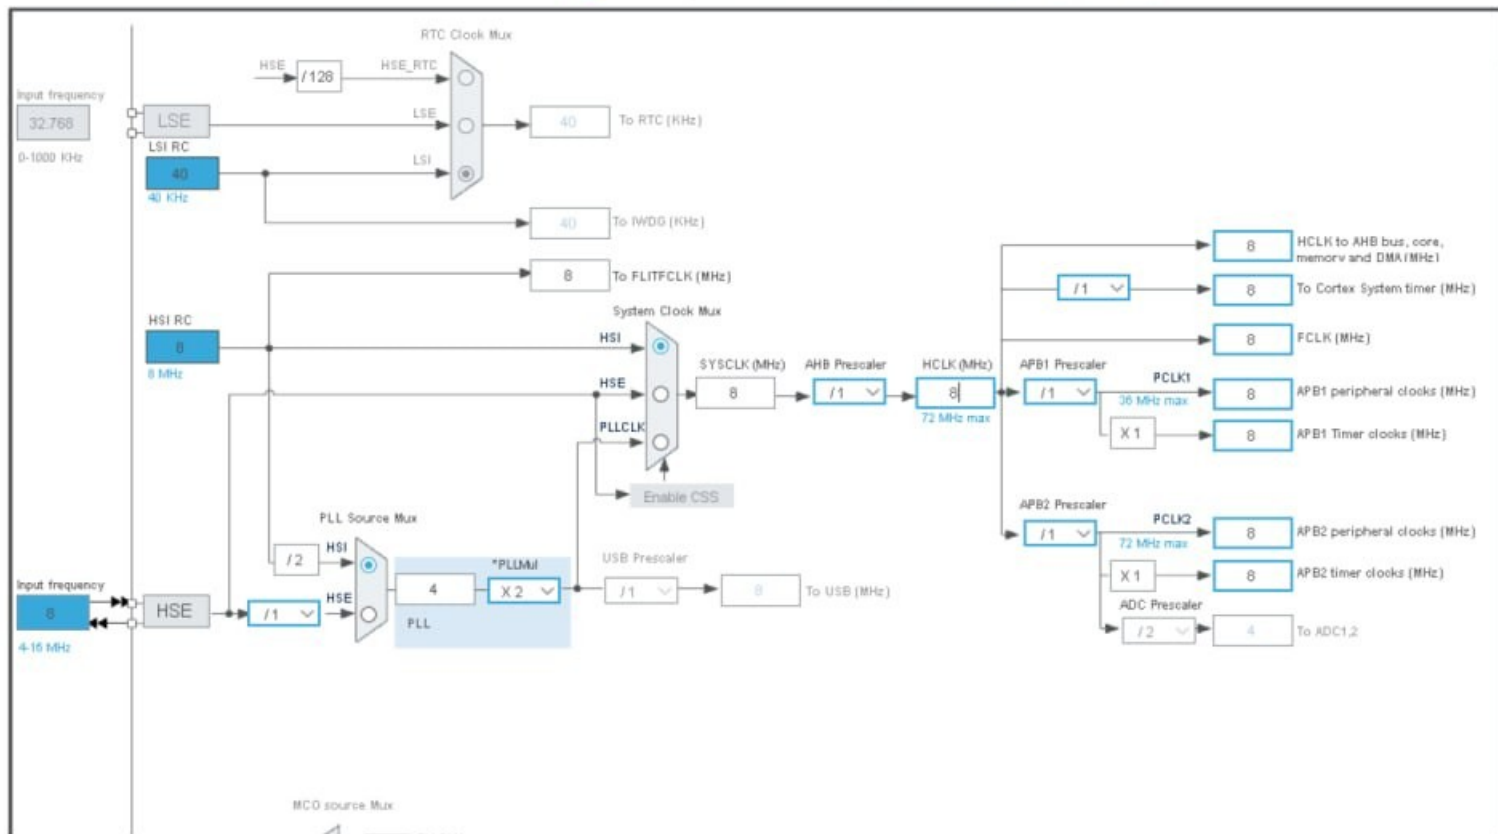

Pinout & Configuration

Clock Configuration

Project Manager

Tools

