


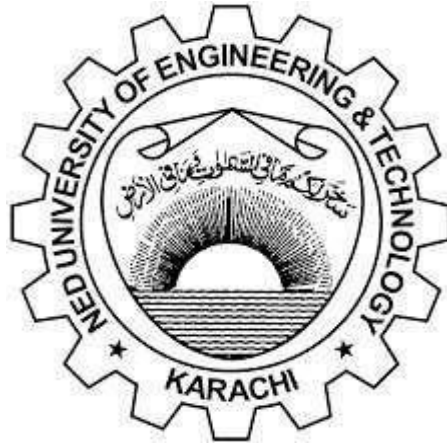

Computer Communication Networks (CT-376)

[REDACTED]

[REDACTED]


[REDACTED] CT-376

[REDACTED] CT-376/0001

Submitted to: [REDACTED]

Question:

in eNSP simulator, use a network switch of 24 ports and connect 24 PCs with it. Then assign the IP addresses (using VLSM) to each PCs and then insert label/caption in the topology.

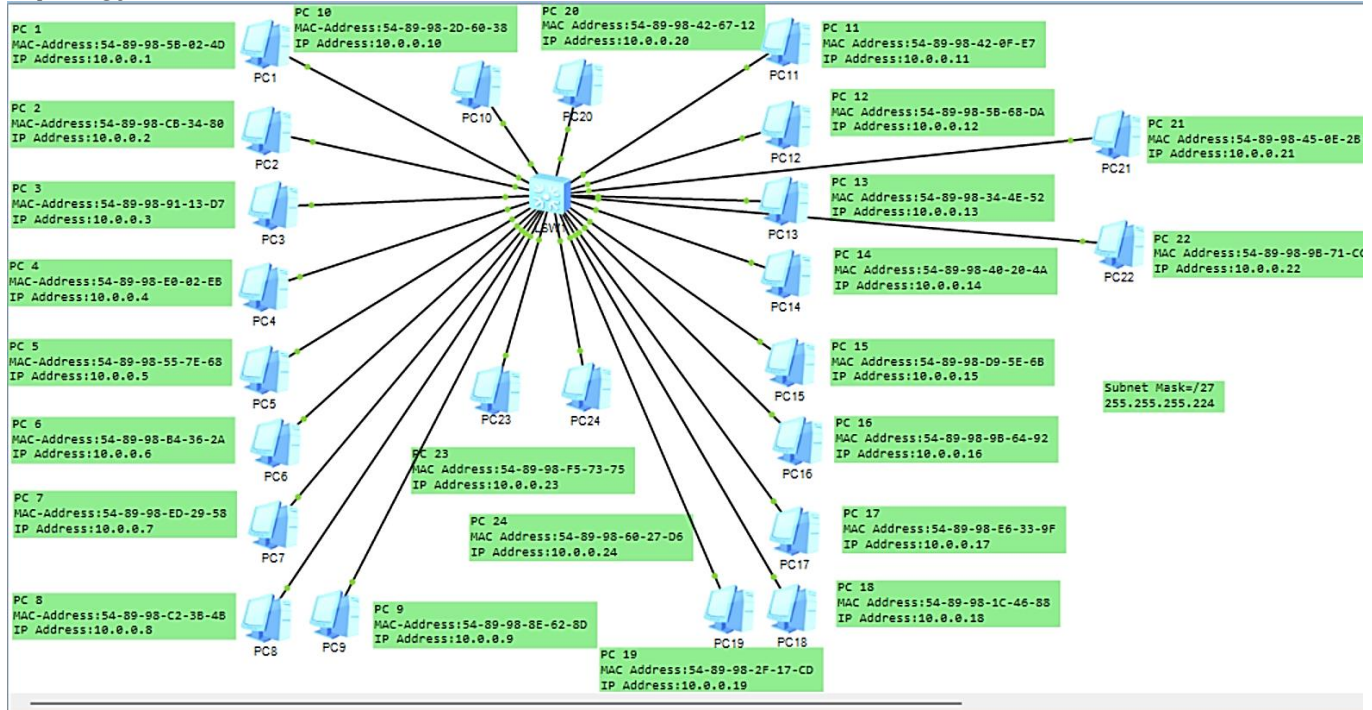**Subnet Mask=255.255.255.224**

PC	MAC-Address	IP Address
PC-1	54-89-98-5B-02-4D	10.0.0.1
PC-2	54-89-98-CB-34-80	10.0.0.2
PC-3	54-89-98-91-13-D7	10.0.0.3
PC-4	54-89-98-E0-02-EB	10.0.0.4
PC-5	54-89-98-55-7E-68	10.0.0.5
PC-6	54-89-98-B4-36-2A	10.0.0.6
PC7	54-89-98-ED-29-58	10.0.0.7
PC-8	54-89-98-C2-3B-4B	10.0.0.8
PC-9	54-89-98-8E-62-8D	10.0.0.9
PC-10	54-89-98-2D-60-38	10.0.0.10
PC-11	54-89-98-42-0F-E7	10.0.0.11
PC-12	54-89-98-5B-68-DA	10.0.0.12
PC-13	54-89-98-34-4E-52	10.0.0.13
PC-14	54-89-98-40-20-4A	10.0.0.14
PC-15	54-89-98-D9-5E-6B	10.0.0.15
PC-16	54-89-98-9B-64-92	10.0.0.16
PC-17	54-89-98-E6-33-9F	10.0.0.17
PC-18	54-89-98-1C-46-88	10.0.0.18
PC-19	54-89-98-2F-17-CD	10.0.0.19

PC-20	54-89-98-42-67-12	10.0.0.20
PC-21	54-89-98-45-0E-2B	10.0.0.21
PC-22	54-89-98-9B-71-CC	10.0.0.22
PC-23	54-89-98-F5-73-75	10.0.0.23
PC-24	54-89-98-60-27-D6	10.0.0.24