


eBox-3300MX

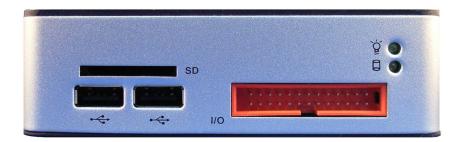

eBox-3300MX-JSK

Specification:

- VESA mounting hole support
- MSTI PMX-1000
- Onboard 512 MB DDR2
- SD boot
- 3 X USB V2.0 port (2 in front)
- 10/100Mbps LAN
- Audio
- PXE diskless boot
- 3 x RS-232 (optional)
- 1 x RS-422 (optional)
- 1 x RS-485 (optional)
- 24 bit GPIO (optional)
- Mini PCI socket (optional)
- Wireless LAN (optional)
- 2.5" SATA Hard Disk installation support (option)
- Ultra Low Power

Model Name	3300MX-3300MX-3300MX-3300MX- 3300MX- 3300MX- 3300MX- 3300MX- TM 3300MX-TH 3300MX-TC								
Processor	MSTI PMX-1000 (1GHz)								
Memory	Onboard 512MB DDR2								
VGA	Integrated Graphics Chip / D-Sub 15-pin Integrated Graphics Chip / RCA Jack								
Ethernet	10/100 Mbps LAN (RJ-45 connector) Built-in PXE diskless boot function								
USB	External : 3 ports (2 in the front) Internal : 1 port (reserve for USB Dongle)								
Audio	Mic in and Line out								
GPIO	N/A								
SD Slot	1X								
MIO SATA**	1x N/A 1x N/A N/A 1x N/A 1x N/A								
PS2	PS/2 for Keyboard/Mouse x 1								

Serial	RS-232	3x	N/A	N/A	3x	2x	2x	3x	N/A	N/A	3x
	RS-422		N/A	N/A		1x			N/A	N/A	
	RS-485		N/A	N/A			1x		N/A	N/A	
Р	ower	DC +8V ~ +15V									
Dimensions 115 x 115 x 3						x 115 x 35	mm				
Weight 500g											
Operation Temp. 5 ~ 50 °C											

Opolo		۱۳۰			- 0			
Model Name		3300MX-G	3300MX- GC22	3300MX- GC85	3300MX-JSK			
Pro	cessor	MSTI PMX-1000 (1GHz)						
Memory		Onboard 512MB DDR2						
VGA		Integrated Graphics Chip / D-Sub 15-pin						
Ethernet		10/100 Mbps LAN (RJ-45 connector) Built-in PXE diskless boot function						
USB		External : 3 ports (2 in the front) Internal : 1 port (reserve for USB Dongle)						
Audio		N/A						
GPIO		24-bit GPIO						
	SD Slot	1X						
MIO	SATA**	N/A	N/A	N/A	1x			
	PS2	PS/2 for Keyboard/Mouse x 1						
	RS-232	N/A	2x	2x	3x			
Serial	RS-422	N/A	1x					
	RS-485	N/A		1x				
Power		DC +8V ~ +15V						
Dimensions		115 x 115 x 35 mm						
W	eight	500g						
Operation Temp.		5 ~ 50 ℃						

Ordering Information:

eBox-3300MX: Standard Version with SATA and 3 x RS-232 ports

eBox-3300MX-M: Standard Version

eBox-3300MX-H: Standard Version with SATA support eBox-3300MX-C: Standard Version with 3 x RS-232 ports

eBox-3300MX-C22: Standard Version with 2 x RS-232 ports, and 1x RS-422 port eBox-3300MX-C85: Standard Version with 2 x RS-232 ports, and 1x RS-485 port

eBox-3300MX-G: GPIO Version

eBox-3300MX-GC22: GPIO Version with 2 x RS-232, and 1 x RS-422 port eBox-3300MX-GC85: GPIO Version with 2 x RS-232, and 1 x RS-485 port

eBox-3300MX-JSK: GPIO Version with 3 x RS-232 ports

eBox-3300MXT: Standard Version with SATA, TV-Out, and 3 x RS-232 ports

eBox-3300MX-TM: Standard Version with TV-Out

eBox-3300MX-TH: Standard Version with SATA support, and TV-Out eBox-3300MX-TC: Standard Version with 3 x RS-232 ports, and TV-Out