


# ***Sipeed M0S DataSheet***

## ***V1.0***

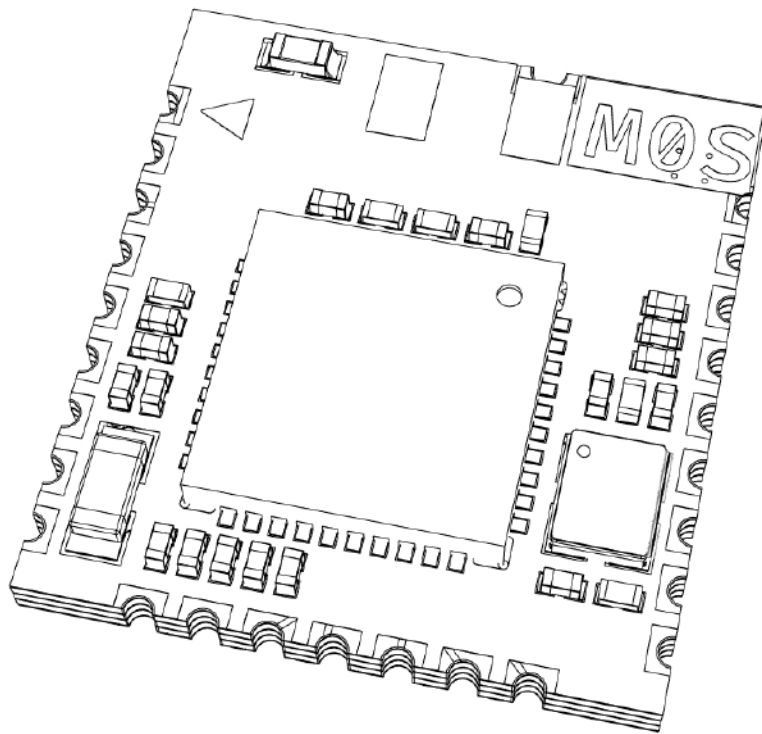

## Revision History

Date	Revision	Description
2023-01-12	1.0	Initial Release
2023-01-30	1.1	Modify the pin number

# Warranty Disclaimer

SIPEED Co., Ltd makes no warranty, representation or guarantee (expressed, implied, statutory, or otherwise) by or with respect to anything in this document, and shall not be liable for any implied warranties of non-infringement, merchantability or fitness for a particular purpose or for any indirect, special or consequential damages.

Information furnished is believed to be accurate and reliable. However, SIPEED Co., Ltd assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use.

SIPEED Co., Ltd' s products are not designed, intended, or authorized for using as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SIPEED Co., Ltd' s product could create a situation where personal injury or death may occur, should buyer purchase or use SIPEED Co., Ltd' s products for any such unintended or unauthorized application, buyers shall indemnify and hold SIPEED Co., Ltd and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, expenses, and reasonable attorney fees arising out of, either directly or indirectly, any claim of personal injury or death that may be associated with such unintended or unauthorized use, even if such claim alleges that SIPEED Co., Ltd was negligent regarding the design or manufacture of the part.

## Copyright and Patent Right

Information in this document is provided solely to enable system and software implementers to use SIPEED Co., Ltd' s products. There are no expressed or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

**SIPEED Co., Ltd does not convey any license under its patent rights nor the rights of others.**

**All copyright and patent rights referenced in this document belong to their respective owners and shall be subject to corresponding copyright and patent licensing requirements.**

## Trademarks

SIPEED and SIPEED™ logo and the name of SIPEED Co., Ltd' s products are trademarks of SIPEED Co., Ltd. and are exclusively owned by SIPEED Co., Ltd. References to other companies and their products use trademarks owned by the respective companies and are for reference purpose only.

## Confidentiality

The information contained herein (including any attachments) is confidential. The recipient hereby acknowledges the confidentiality of this document, and except for the specific purpose, this document shall not be disclosed to any third party.

## Reverse engineering or disassembly is prohibited.

SIPEED CO.,LTD. RESERVES THE RIGHT TO MAKE CHANGES IN ITS PRODUCTS OR PRODUCT SPECIFICATIONS WITH THE INTENT TO IMPROVE FUNCTION OR DESIGN AT ANY TIME AND WITHOUT NOTICE AND IS NOT REQUIRED TO UNDATE THIS DOCUMENTATION TO REFLECT SUCH CHANGES.

## Copyright © 2023 SIPEED Co., Ltd.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electric or mechanical, by photocopying, recording, or otherwise, without the prior written consent of SIPEED Co., Ltd.

# Contents

Revision History	2
Warranty Disclaimer	3
Contents	4
Overview	5
1 Key Specifications	6
2 Technical Specifications	7
3 Software Overview	7
4 Dimensions and interfaces	8
4.1 Module size and structure	8
4.2 Physical picture of camera	9
4.3 Pin description	10
5 Product related Executive Standards	11
6 Operating precautions	12
7 Related Information	13

# Overview

The M0S is a very small module measuring 10x11 mm using the BL616 as the main control chip, with the following excellent features.

1. tri-mode wireless: WiFi6 / Bluetooth 5.2 / Zigbee
2. high mains frequency: 320MHz silent, up to 384MHz
3. Low power consumption: WiFi6 low power consumption on network current down to 100uA or less (DTIM10)
4. DSP acceleration: support for RISC-V P extended instruction set for nearly double acceleration in the TinyMaix inference framework
5. High-speed USB: Supports USB2.0 HS OTG up to 480Mbps
6. Rich peripheral interfaces: RGB LCD, DVP Camera, Ethernet RMII, SDIO, etc.
7. Small footprint: integrated ceramic antenna on 10x11mm area with full pin-out.

# 1 Key Specifications

Parameter	Description
BL616 Chip	<b>CPU:</b> Single-Core 32-bit RISC-V CPU, Up to 320MHz With FPU, DSP, High Speed Cache and Memory 2 x 32-bit universal timers 4 x DMA channels JTAG Support
	<b>Memory:</b> 480KB SRAM 4MB Flash
	<b>Wireless:</b> 2.4G RF transceiver Wi-Fi 6 (IEEE 802.11 b/g/n/ax) Bluetooth® 5.2 Dual-Mode (BT+BLE) Zigbee / IEEE 802.15.4
	<b>Audio codec:</b> 1 x Audio ADC(MIC, SNR>92dB) 1 x Audio DAC(Speaker, SNR>95dB) Support 8/12/16/22.05/24/32/44.1/48KHz
	<b>Video/Image:</b> Camera Sensor DVP Video Codec MJPEG encoding LCD display (QSPI, DBI interface)
	<b>Peripheral:</b> USB 2.0 HS OTG (High-Speed 480MHz) SD Card Interface and SDIO 2.0 Slave 2 x UARTs (Support 5V IO) 2 x I2C, Host Mode Support SPI Master/Slave I2S master/slave 1 x PWM controller (4-channel with complementary outputs) 12-bit~16-bit general-purpose ADC 10-bit general-purpose DAC General-purpose analog comparator (ACOMP)
Parameter	Description
OnBoard Components	On-board 2.4G Antenna
	Elicit all GPIOs
PCBA Size	10*11*1.8mm

## 2 Technical Specifications

(Scenario: TA = 25°C, object reflectivity 90% if not otherwise specified)


Parameter	Description	Min	Typ	Max	Unit
Module Supply Voltage		3.0	3.3	3.4	V
Supply Electric Current		-	-	-	A
Operating Electric Current		-	-	-	A
Temperature Rise		-	--	30K	
Operating Temperature		-10	-	65	°C

## 3 Software Overview

Parameter	Description
Operating System	FreeRTOS
Firmware download method	USB virtual serial port download, or USB virtual disk drag and drop update
Development method	Development method C SDK, pikascript scripted programming


## 4 Dimensions and interfaces

### 4.1 Module size and structure

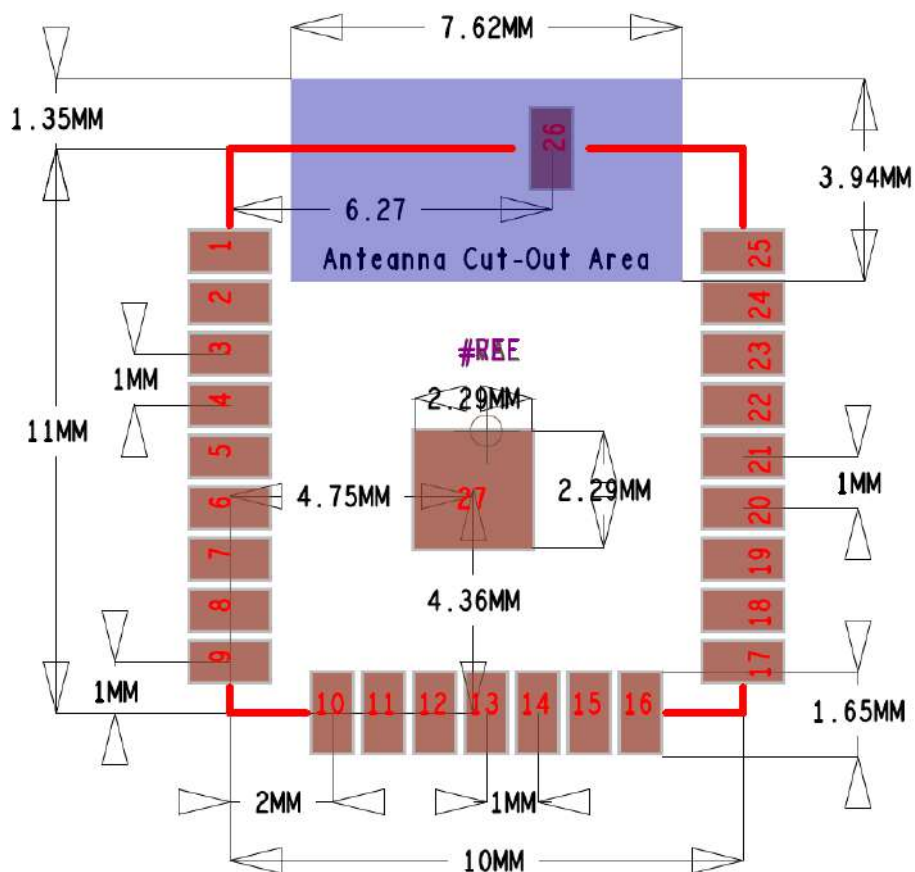




## 4.2 Physical picture of camera

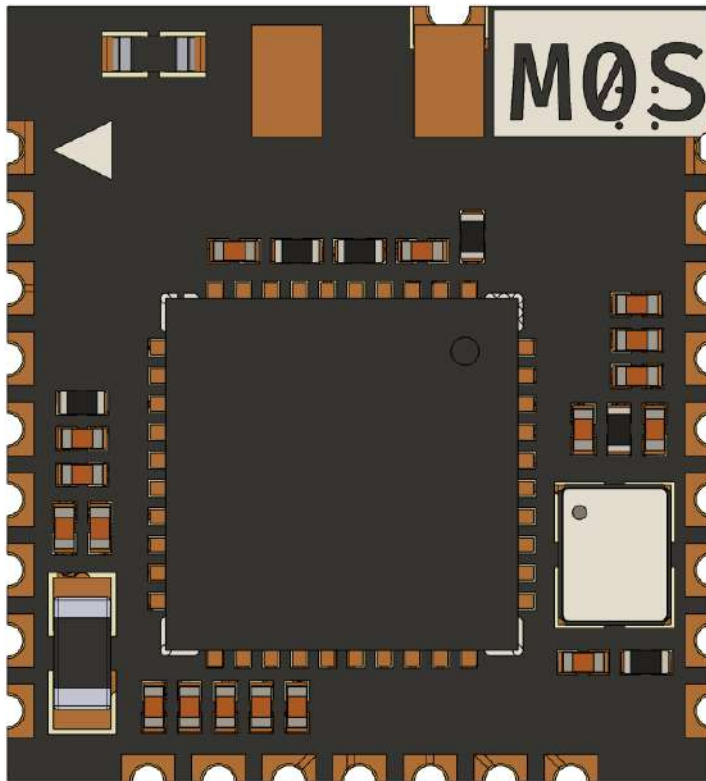

## 4.3 Pin description

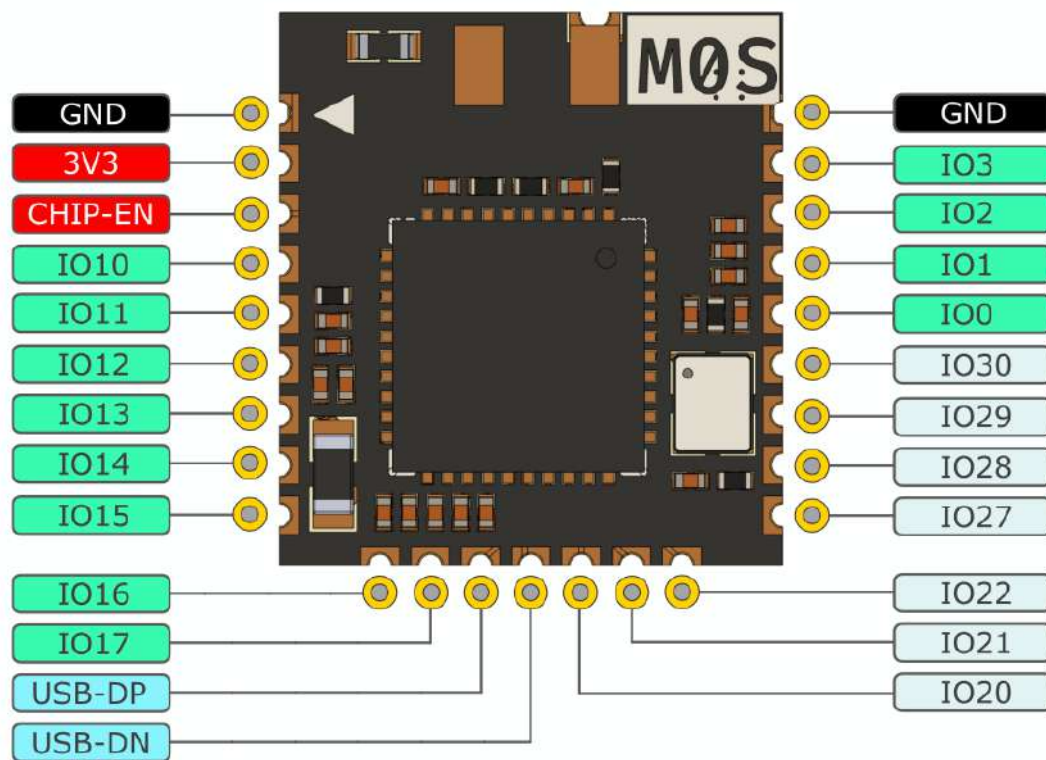

## 5 Product related Executive Standards

## 6 Operating precautions

During the use of this product, attention must be paid to operation safety and maintenance, otherwise it may cause damage to the product, shorten its service life, and even endanger personal safety. For safe use and maintenance, attention should be paid to the following aspects:

- This product is a high-precision electronic product. Please do not collide or fall.
- Although the Class1 laser used in this product meets the safety standards for human eyes, it is not recommended to look directly at the laser for a long time to avoid discomfort.
- Do not place this product in a place with high temperature or direct sunlight.
- Do not disassemble or modify this product without permission to prevent damage to the components of the product.
- Do not touch the camera of this product to avoid leaving fingerprints and other pollutants affecting the image effect.
- Please keep this product out of the reach of children to prevent accidents.
- Please follow the manual for correct and safe operation.