
Lab 4: Routing Protocols

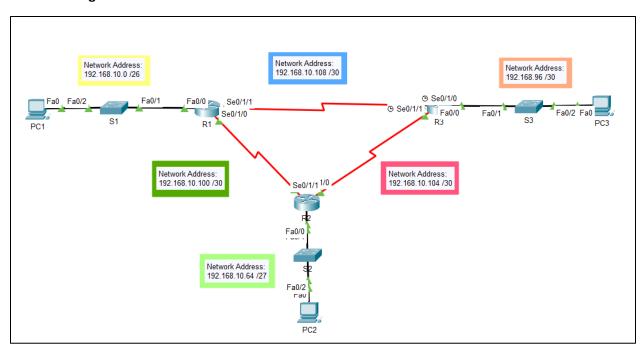

Network Area	Device Name	IP Address	Subnet Mask
LAN 1	R1	192.168.10.1	255.255.255.192
	PC1	192.168.10.2	255.255.255.192
LAN 2	R2	192.168.10.65	255.255.255.224
	PC2	192.168.10.66	255.255.255.224
LAN 3	R3	192.168.10.97	255.255.255.252
	PC3	192.168.10.98	255.255.255.252
WAN 1	R1	192.168.10.101	255.255.255.252
	R2	192.168.10.102	255.255.255.252
WAN 2	R3	192.168.10.105	255.255.255.252
	R2	192.168.10.106	255.255.255.252
WAN 3	R1	192.168.10.109	255.255.255.252
	R3	192.168.10.110	255.255.255.252

R1 RIP Configuration:

```
R1(config) #router rip
R1(config-router) #version 2
R1(config-router) #network 192.168.10.0
R1(config-router) #network 192.168.10.100
R1(config-router) #network 192.168.10.108
R1(config-router) #exit
R1(config) #exit
R1#
```

R2 RIP Configuration:

```
R2 (config) #router rip
R2 (config-router) #
%LINEPROTO-5-UPDOWN: Line protocol on Inte:
version 2
R2 (config-router) #network 192.168.10.64
R2 (config-router) #network 192.168.10.100
R2 (config-router) #network 192.168.10.104
R2 (config-router) #exit
R2 (config) #exit
R2 #
```

R3 RIP Configuration:

```
R3(config) #router r
%LINEPROTO-5-UPDOWN: Line protocol on Interfaip
R3(config-router) #version 2
R3(config-router) #network 192.168.10.96
R3(config-router) #network 192.168.10.104
R3(config-router) #network 192.168.10.108
R3(config-router) #exit
R3(config) #
R3(config) #exit
```

Verifying RIP Configuration in R1:

```
Rl#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       {\tt N1} - OSPF NSSA external type 1, {\tt N2} - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route
Gateway of last resort is not set
     192.168.10.0/24 is variably subnetted, 6 subnets, 3 masks
С
        192.168.10.0/26 is directly connected, FastEthernet0/0
        192.168.10.64/27 [120/1] via 192.168.10.102, 00:00:11, Serial0/1/1
        192.168.10.96/30 [120/1] via 192.168.10.110, 00:00:08, Serial0/1/0
R
        192.168.10.100/30 is directly connected, Serial0/1/1
C
R
        192.168.10.104/30 [120/1] via 192.168.10.102, 00:00:11, Serial0/1/1
                           [120/1] via 192.168.10.110, 00:00:08, Serial0/1/0
        192.168.10.108/30 is directly connected, Serial0/1/0
R1#
```

Verifying RIP Configuration in R2:

```
R2#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
      i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route
Gateway of last resort is not set
     192.168.10.0/24 is variably subnetted, 6 subnets, 3 masks
R
       192.168.10.0/26 [120/1] via 192.168.10.101, 00:00:10, Serial0/1/1
        192.168.10.64/27 is directly connected, FastEthernet0/0
R
        192.168.10.96/30 [120/1] via 192.168.10.105, 00:00:02, Serial0/1/0
        192.168.10.100/30 is directly connected, Serial0/1/1
        192.168.10.104/30 is directly connected, Serial0/1/0
       192.168.10.108/30 [120/1] via 192.168.10.101, 00:00:10, Serial0/1/1
R
                          [120/1] via 192.168.10.105, 00:00:02, Serial0/1/0
R2#
```

Verifying RIP Configuration in R3:

```
R3#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route
Gateway of last resort is not set
     192.168.10.0/24 is variably subnetted, 6 subnets, 3 masks
R
        192.168.10.0/26 [120/1] via 192.168.10.109, 00:00:10, Serial0/1/0
R
        192.168.10.64/27 [120/1] via 192.168.10.106, 00:00:07, Serial0/1/1
        192.168.10.96/30 is directly connected, FastEthernet0/0
        192.168.10.100/30 [120/1] via 192.168.10.109, 00:00:10, Serial0/1/0
R
                          [120/1] via 192.168.10.106, 00:00:07, Serial0/1/1
С
        192.168.10.104/30 is directly connected, Serial0/1/1
С
        192.168.10.108/30 is directly connected, Serial0/1/0
```