CRYSTEK CRYSTALS
A Division of Crystek Corporation

CCPD-034 5×7mm SMD LVPECL Clock Oscillator

CCPD-034 Model
5×7 mm SMD, **3.3V, LVPECL**

RoHS Compliant

Model CCPD-034 is a 162.000MHz to 250.000MHz LVPECL Clock Oscillator operating at 3.3Volts. The oscillator utilizes a High Q Third Overtone crystal design providing very low Jitter and Phase Noise. No Sub-Harmonics are present in the Output Signal.

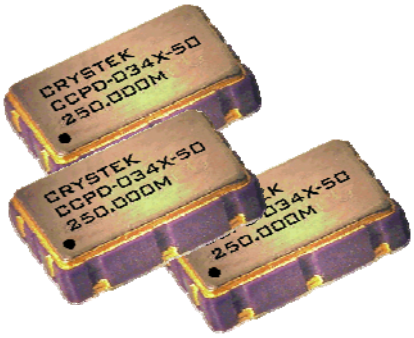

5×7mm SMD

Applications:

Digital Video
SONET/SDH/DWDM
Storage Area Networks
Broadband Access
Ethernet, Gigabit Ethernet

Rev: O
Date: 08-Mar-11
Page 1 of 3

CCPD-034 Model
5×7 mm SMD, **3.3V, LVPECL**

RoHS Compliant

Frequency Range:	**162.000MHz to 250.000MHz**
Frequency Stability Options(ppm):	**±20, ±25, ±50, ±100**
Temperature Range:	**(standard) 0°C to +70°C**
(Option M)	**-20°C to +70°C**
(Option X)	**-40°C to +85°C**
Storage:	**-45°C to 90°C**
Input Voltage:	**3.3V ± 0.3V**
Input Current:	**55mA Typ., 88mA Max**
Output:	**Differential LVPECL**
Symmetry:	**45/55% Max @ 50%Vdd**
Rise/Fall Time:	**1nsec Max @ 20% to 80% Vdd**
Logic: Terminated to Vdd-2V into 50 Ω	
Temp. 0°C to 85°C	**"0"=1.490 Min., 1.680 Max**
	"1"=2.275 Min., 2.420 Max
Temp. -40°C to 0°C	**"0"=1.470 Min., 1.745 Max**
	"1"=2.215 Min., 2.420 Max
Disable Time:	**200nSec Max**
Enable Time:	**1mSec Typ., 2mSec Max**
Phase Jitter: 12kHz~80MHz	**0.5psec Typ., 1psec RMS Max**
Phase Noise: (See Plot Below)	
Sub-harmonics:	**None**
Aging:	**<3ppm 1st/yr, <1ppm every year thereafter**

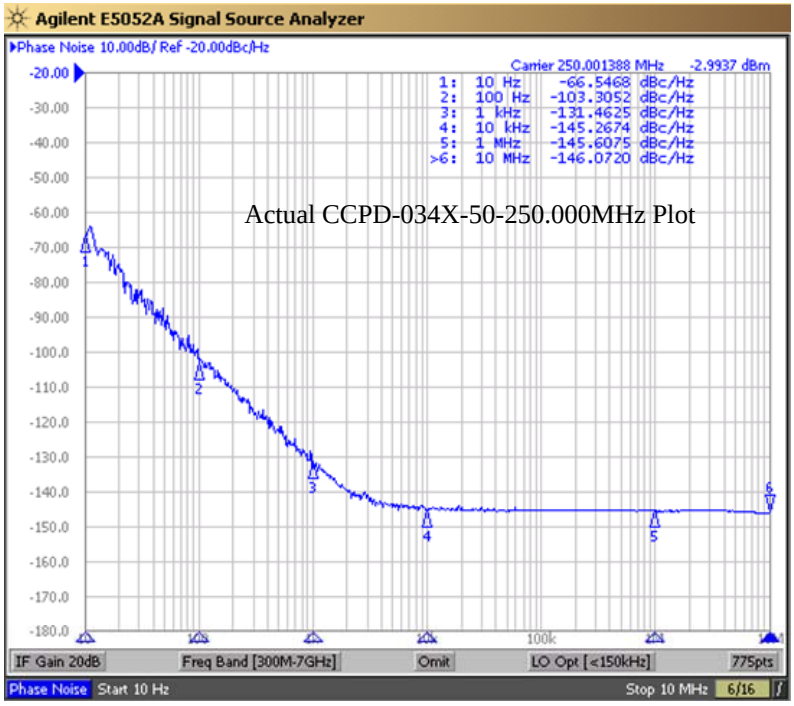

Actual CCPD-034X-50-250.000MHz Plot

Rev: O
Date: 08-Mar-11
Page 2 of 3

CRYSTEK CRYSTALS
A DIVISION OF CRYSTEK CORPORATION

CCPD-034 5×7mm SMD LVPECL Clock Oscillator

RoHS Compliant

CCPD-034 Model
5×7 mm SMD, **3.3V, LVPECL**

Crystek Part Number Guide

CCPD - 034 X - 50 - 250.000
#1 #2 #3 #4 #5

#1 Crystek LVPECL Osc.
#2 Model 034
#3 Temp Range: Blank = 0/70°C, M = -20/70°C, X = -40/85°C
#4 Stability: (see Table 1)
#5 Frequency in MHz: 3 or 6 decimal places

Example:
CCPD-034X-50-250.000
3.3V, -40/85°C, ±50ppm, 250.000 MHz

Stability Indicator	
Blank	± 100ppm
50	± 50ppm
25	± 25ppm
20*	± 20ppm

*not available in -40/85

Table 1

Standard Frequencies
(±50ppm, 0/70°C)
200.000MHz
212.500MHz
250.000MHz

Mechanical:

Shock:	MIL-STD-883, Method 2002, Condition B
Solderability:	MIL-STD-883, Method 2003
Vibration:	MIL-STD-883, Method 2007, Condition A
Solvent Resistance:	MIL-STD-202, Method 215
Resistance to Soldering Heat:	MIL-STD-202, Method 210, Condition I or J

Environmental:

Thermal Shock:	MIL-STD-883, Method 1011, Condition A
Moisture Resistance:	MIL-STD-883, Method 1004

RECOMMENDED REFLOW SOLDERING PROFILE

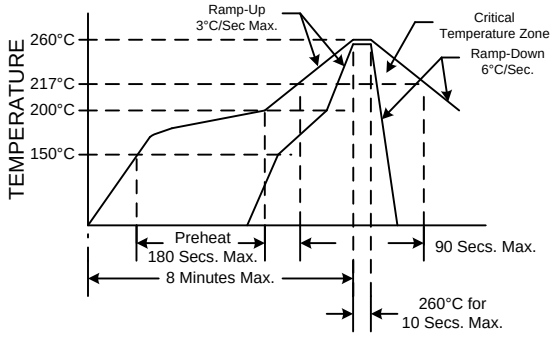

NOTE: Reflow Profile with 240°C peak also acceptable.



Dimensions inches (mm)
All dimensions are Max unless otherwise specified.



Tristate Function	
Function pin 1	Output pin
Open or N/C	Active
"1" level 0.7×Vdd Min	Active
"0" level 0.3×Vdd Max	High Z

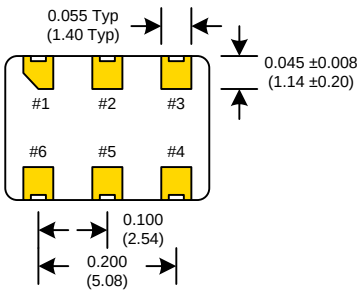

SUGGESTED PAD LAYOUT

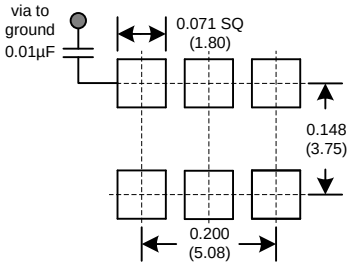

0.01uF Bypass Capacitor Recommended

PIN	Connection
1	Enable/Disable
2	N/C
3	GND
4	Output
5	Comp Output
6	Vcc

Rev: O
Date: 08-Mar-11

CRYSTEK CORPORATION
12730 Commonwealth Drive • Fort Myers, Florida 33913
Phone: 239-561-3311 • 800-237-3061
Fax: 239-561-1025 • www.crystek.com