LED High Bay Retrofit Lamps

Product Specifications



TCP's energy efficient LED High Bay Lamps and sensors are an excellent choice for replacing traditional metal halide products. These are damp location rated and designed for indoor use where low maintenance and high lumen output is required.

Reasons to choose the LED High Bay Lamps from TCP

- Uses less energy than traditional metal halide products
- 50,000 hour life minimizes replacement and maintenance costs
- UL approved for damp locations
- Rated for enclosed fixtures
- 120° beam angle for full light distribution
- Isolated driver for better heat dissipation and eliminates the need for a ballast
- Surge protection – all wattages have 4KV surge protection
- Pair with HID Replacement Accessories to add features such as motion sensing, natural light detection, and to connect to an external 0-10, PWM, or resistance dimming system to the replacements lamps

Ideal Applications

- Warehouses
- Factories
- Canopy Lights
- Gymnasiums
- Parking Garages
- Storage Facilities
- Large Conference Halls
- Event Centers
- Assembly Lines

Specifications:

Color Temperatures	4000K, 5000K
Wattage Replacements	200W, 250W, 400W
Input Line Voltage	120-277 VAC
Input Line Frequency	50/60HZ
Lamp Life (Rated)	50,000 hours
Minimum Starting Temp	-40°C
Maximum Operating Temp	60°C
CRI	≥ 80
Surge Protection	4kv

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

RoHS COMPLIANT

5 YEAR WARRANTY*
*Based on 12 hours use per day

LED High Bay Retrofit Lamps & Sensors

Specifications



L60HBE2650XXK



L80HBEX3950XXK



L115HBEX3950XXK

ITEM #	DESCRIPTION	DLC*	METAL HALIDE EQUIVALENT	VOLTAGE	BASE LAMP LUMENS	LED WATTS	CRI	COLOR TEMP	MOL (INCHES)	DIA (INCHES)	MIN ENCLOSURE DIMENSION (INCHES)	BASE	HID REPLACEMENT LAMP ACCESSORIES	CASE QTY
LED High Bay Lamp Series														
L60HBE265040K	LED60 HB200 E264K		200	120-277VAC	8100	60	80	4000K	6.89	6.93	6.89" x 6.73"	E26	Yes	4
L60HBE265050K	LED60 HB200 E265K		200	120-277VAC	8100	60	80	5000K	6.89	6.93	6.89" x 6.73"	E26	Yes	4
L80HBEX395040K	LED80 HB250 EX394K	★	250	120-277VAC	10800	80	80	4000K	7.87	7.01	7.87" x 7.01"	EX39	Yes	4
L80HBEX395050K	LED80 HB250 EX395K	★	250	120-277VAC	10800	80	80	5000K	7.87	7.01	7.87" x 7.01"	EX39	Yes	4
L115HBEX395040K	LED115 HB400 EX394K	★	400	120-277VAC	15525	115	80	4000K	9.06	7.01	9.25" x 9.21"	EX39	Yes	4
L115HBEX395050K	LED115 HB400 EX395K	★	400	120-277VAC	15525	115	80	5000K	9.06	7.01	9.25" x 9.21"	EX39	Yes	4

*DLC qualified product at time of printing, consult designlights.org for the most up-to-date listing

HID Accessories and Adapters

Item Number	Description
ADAPTERE26E39	E26 TO E39 ADAPTER
ADAPTERE39E26	E39 TO E26 ADAPTER



ADAPTERE26E39



ADAPTERE39E26

Item Number	Name	Description
LHSMWV001	Microwave Motion Sensor	When connected to a lamp, provides Motion Detection through objects and walls.
LHSIR001	PIR Motion Sensor	When connected to a lamp, provides Motion Detection and Daylight Sensing.
LHSDL001	Daylight Sensor	When connected to a lamp, provides Natural Light Detection.
LHDWV001	3 in 1 Dimming Wire	Use to connect lamps to an external 0-10V, PWM, and resistance dimming system.

*See the HID Replacement Lamp Accessories Specification Sheet for more information.



LHSMWV001



LHSIR001



LHSDL001



LHDWV001

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

RoHS COMPLIANT

5 YEAR WARRANTY*
*Based on 12 hours use per day

LED High Bay Retrofit Lamps & Sensors

LED High Bay Retrofit Lamp Installation and Instruction Guide

WARNING! RISK OF ELECTRIC SHOCK! DISCONNECT POWER AT FUSE OR CIRCUIT BREAKER BEFORE INSTALLING OR SERVICING!

For MODELS L60HBE265040K, L60HBE265050K, L80HBEX395040K, L80HBEX395050K, L115HBEX395040K, L115HBEX395050K

STEP #1




POWER OFF

TURN OFF POWER AT CIRCUIT BREAKER
to prevent risk of electric shock.

STEP #2


Fig 1

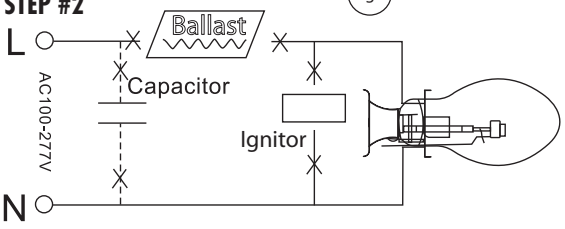

Remove old ballast or disconnect from existing lamp holder. Remove and dispose of ballast in correct manner (also disconnect any other components such as ignitors, starters, capacitors). Shown as Figure 1.

STEP #3


Fig 2

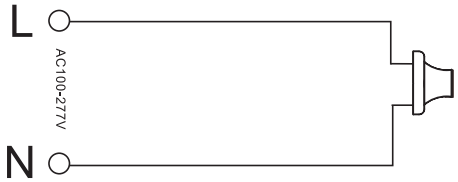

Reconnect directly to the existing lamp holder.
Shown as Figure 2.


STEP #4

Fig 3

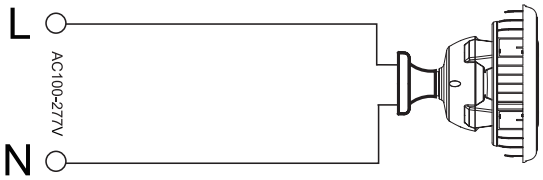

Install new LED replacement lamp. Shown as Figure 3. Please make sure old socket is correctly grounded.

STEP #5



If lamp being installed is over 60w, attach provided tether cable to lamp. Locate either entry hole(**1**) on lamp shown in diagram and feed looped end of tether cable(**2**) through hole. You may need to crimp with pliers first. Once through, take end with grappling clip through loop as shown, tighten and secure clip to safe location.

STEP #6

This luminaire has been modified to operate LED lamps.
Do not attempt to install or operate HID lamps or Compact Fluorescent Luminaires in this luminaire.
In the future, use only bypass lamps.

LED RETROFIT LUMINAIRE CONVERSION


FOR USE ONLY WITH PRODUCTS DESCRIBED AND INSTALLED IN ACCORDANCE WITH THE INSTRUCTIONS PROVIDED WITH THIS RETROFIT KIT (E353692)

REPLACEMENT LAMP:
LXXHE2650YYK ("XX" = 12W & 18W & 27W & 36W & 45W & 54W & 63W & 100W & 120W)
LXXHEX3950YYK ("YY" = 40W (4000K) & 50W (5000K))
LXXHBE2650YYK ("XX" = 60W & 80W & 115W)
LXXHBEX3950YYK ("YY" = 40W (4000K) & 50W (5000K))

Please apply included label to retrofitted luminaire in a visible location.

STEP #7 (OPTIONAL)

Fig 2 Fig 3

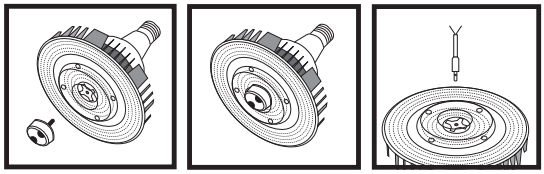

Sensor Installation

3 In 1 Dimming Wire Installation

Sensor or 3 in 1 dimming wire installation.
Connect as shown in Figure 2 and 3.
The sensor/wire should be connected before the lamp is installed.
Connect dimming wire to manufacturer's dimming system as per instructions.

STEP #8



POWER ON

TURN ON POWER AT
CIRCUIT BREAKER

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com
©TCP JUN 2025/WF278200

RoHS COMPLIANT

5 YEAR WARRANTY*
*Based on 12 hours use per day

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 30 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:	Catalog Number:
Date:	Type:
Model:	Notes:
Project:	
Rep:	

TCP® we know light.™

For more information on the quality and care TCP can deliver, call us at 800.324.1496 or visit tcpi.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516