


# Conduit Layout Diagram

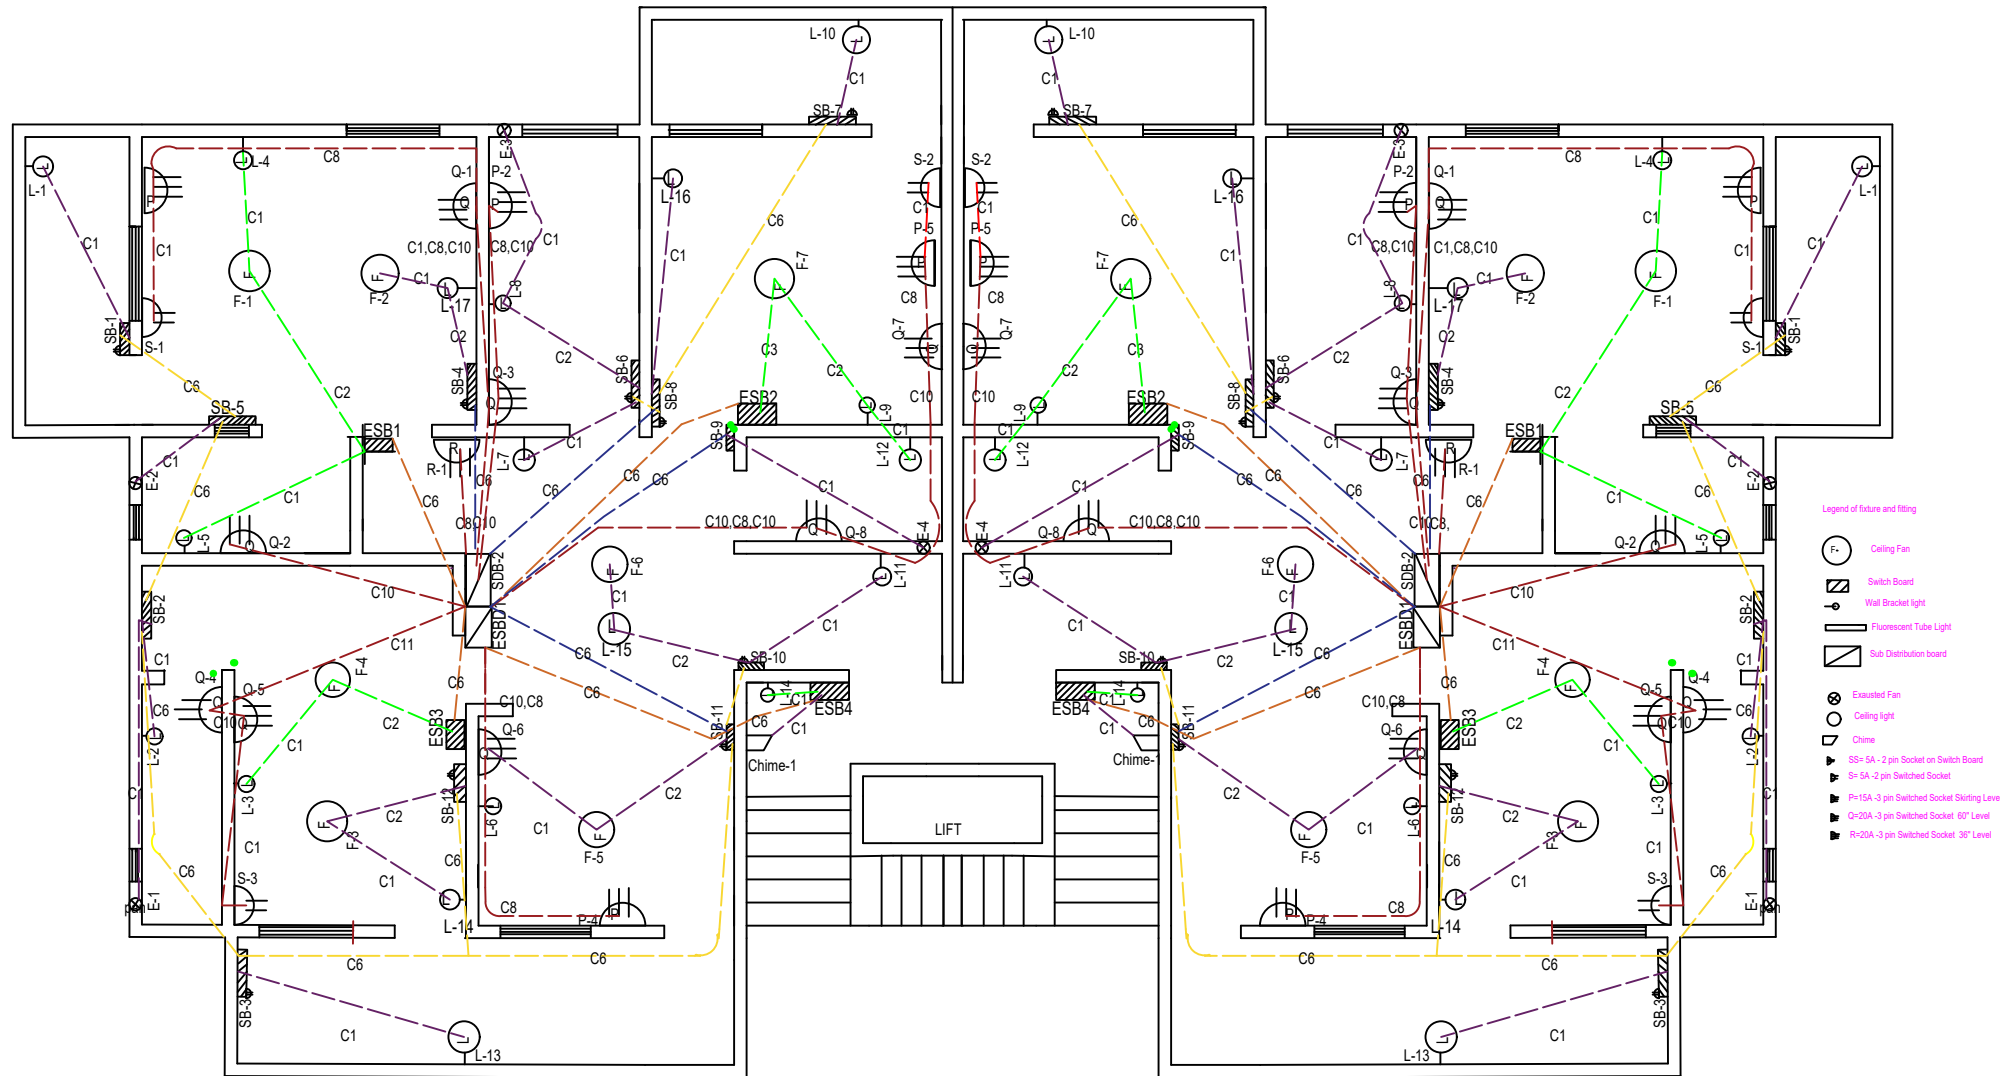

- Electrical component to switch board Connection
- Switch-Board to Switch-Board internal Connection
- 3 pin socket to Sub-Distribution Board Connection
- Switch-Board to Sub-Distribution Board Connection
- Component to Emergency Switch board
- ESB to ESDB

- C1 2 x 1.5 mm BYM +1.5 mm BYA
- C2 4 x 1.5 mm BYM +1.5 mm BYA
- C3 6 x 1.5 mm BYM +1.5 mm BYA
- C6 2 x 2.5 mm BYM +2.5 mm BYA
- C8 2 x 4 mm BYM + 4 mm BYA
- C10 2 x 6 mm BYM + 6 mm BYA
- C11 4 x 6 mm BYM + 6 mm BYA

- Legend of fixture and fitting
- Ceiling Fan
  - Switch Board
  - Wall Bracket light
  - Fluorescent Tube Light
  - Sub Distribution board
  - Exhaust Fan
  - Ceiling light
  - Chime
  - SS-5A - 2 pin Socket on Switch Board
  - S-5A - 2 pin Switched Socket
  - Pr-15A - 3 pin Switched Socket Skirting Level
  - Q-20A - 3 pin Switched Socket 60° Level
  - R-20A - 3 pin Switched Socket 30° Level