

- **Settings - Network & Internet – Network and Sharing Center**
- If the wireless network has not been previously setup continue with “**Set up a new connection or network**” followed by “**Manually connect to a wireless network**”

Change your networking settings




Set up a new connection or network

Set up a broadband, dial-up, or VPN connection; or set up a router or access point.

– Set Up a Connection or Network

Choose a connection option

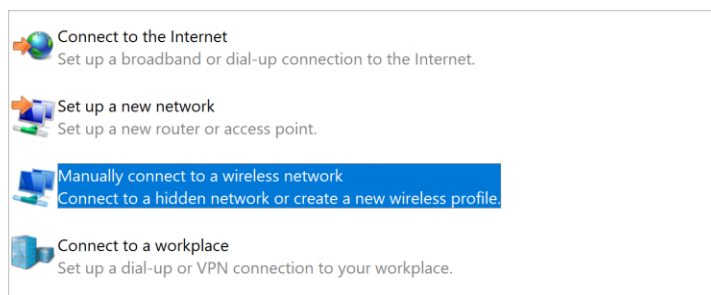

NOTE! For NCLH 802.1x setup the **SSID** must be **NCLH ‘Shipname’** where ‘shipname’ is your vessel name.

← Manually connect to a wireless network

Enter information for the wireless network you want to add

Network name:

Security type:

Encryption type:

Security Key: ☐ Hide characters

☒ Start this connection automatically


☒ Connect even if the network is not broadcasting

Warning: If you select this option, your computer's privacy might be at risk.

Next

Cancel


- **Check** – “Remember my credentials for this connection each time I’m logged on”
- **Do not** check - “Verify the server’s identity by validating the certificate.”
- **Do not** check - “Automatically Use my Windows Logon name and password...”

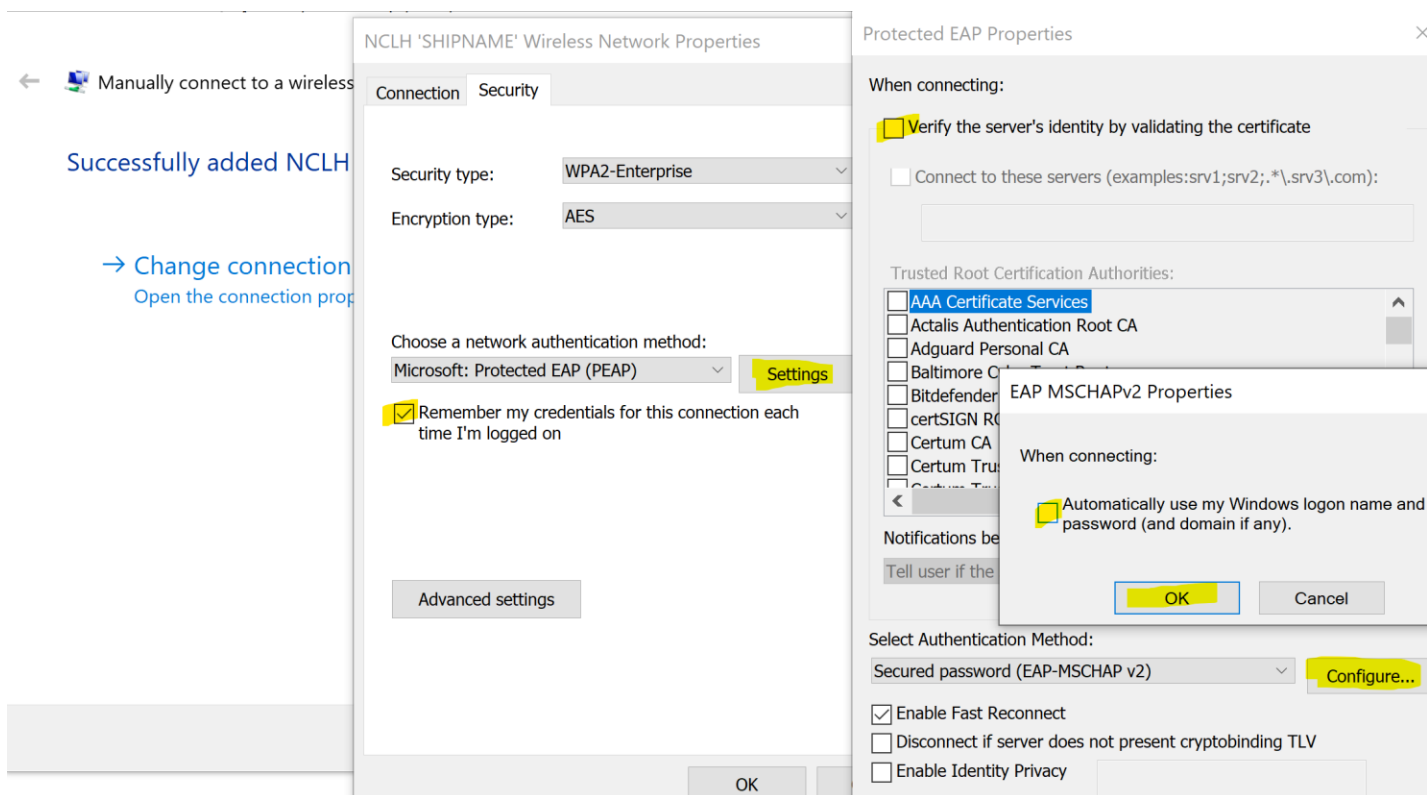


NOTE !

802.1x / dot1.x auth is based on main AD (vessel AD) authentication - AD Users prefix with wifi suffix with vessel number
No trust relation between main AD (vessel AD) and DMZ AD therefore attempting to “Automatically Use my Windows Logon....” or authenticate to wifi for 802.1x with anything other than vessel AD and designated wifi user ID will not work.

Do not check – “Enable single sign on for this network” (unless there is a documented exception or specific instructions)

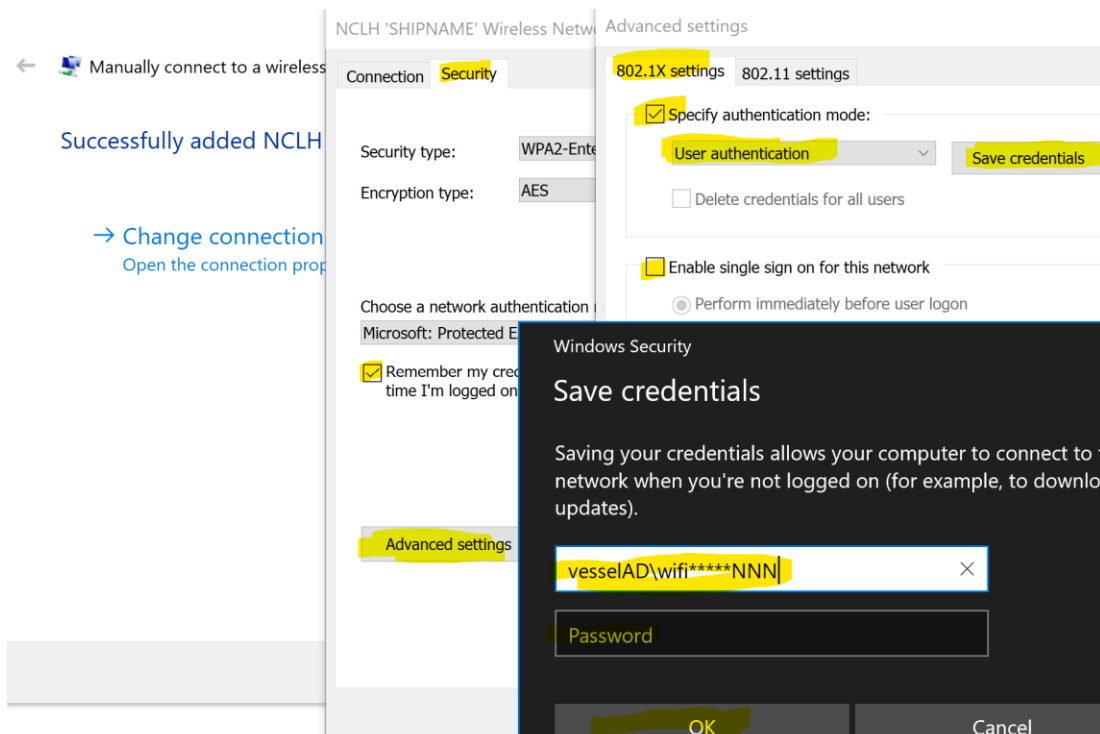

- If the wireless network has been already setup for SSID NCLH 'SHIPNAME' go to '**Settings - Network & Internet – Network and Sharing Center**' select the wireless connection already setup and look for "**Wireless Properties**" then continue as detailed above.

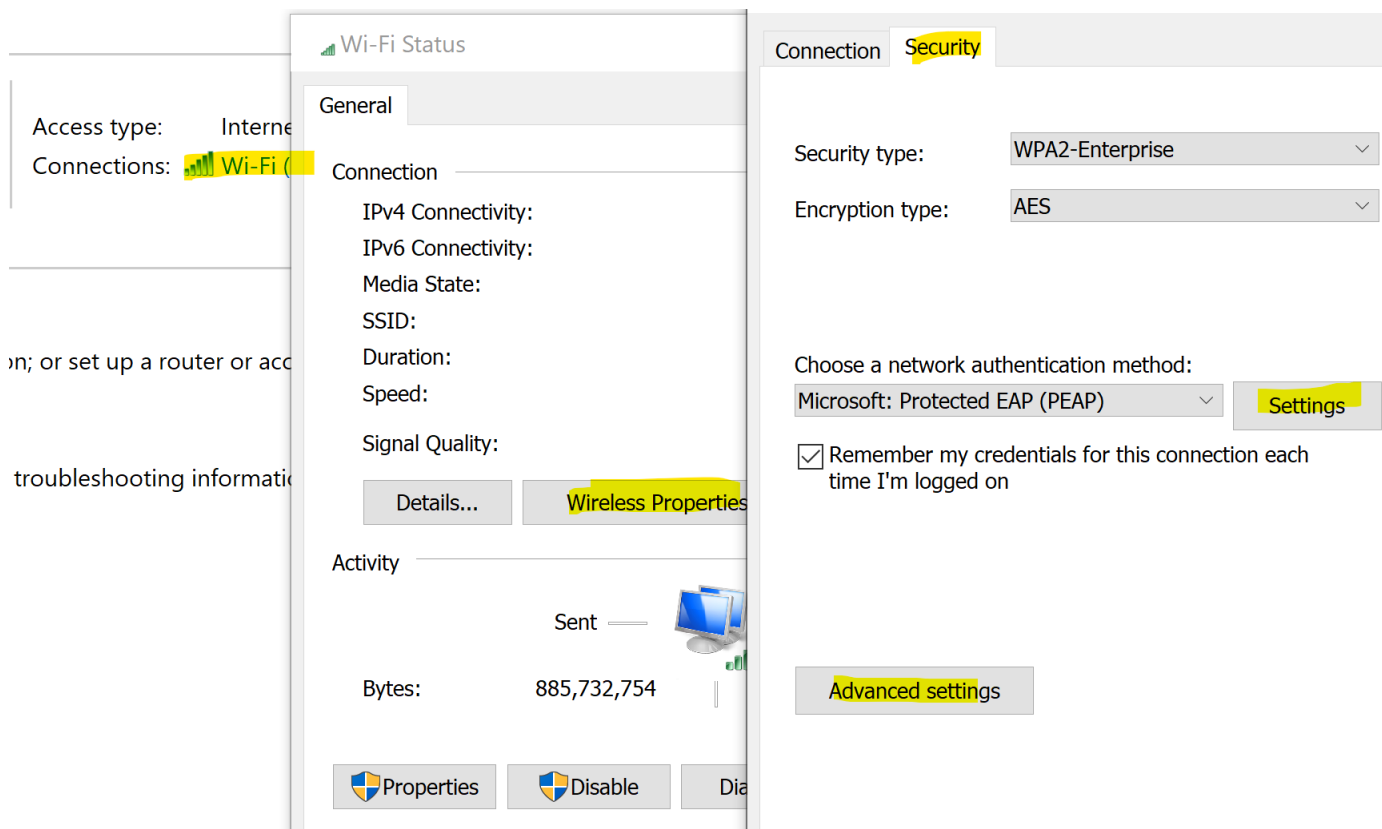

- **Important!** Work with Fleet Systems Managers where the situation requires to configure wifi 802.1x authentication on multiple windows devices that are not joined to main AD. (ex. POS windows systems) or if you experience any issues with 802.1x wifi authentication setup.