

FIBER OPTIC PATCHCORD

DATAWAY Optical Patchcord LC/APC - LC/UPC 1 m Duplex, SM, G.657A2

Singlemode duplex optical jumper cable for structured cabling, FTTH/FTTx and ODF interconnection.

Product Identity

BRAND


DATAWAY

PART NO.

DW-PC-LCA-LCU-657A2-DX-1

EAN

8586026273434

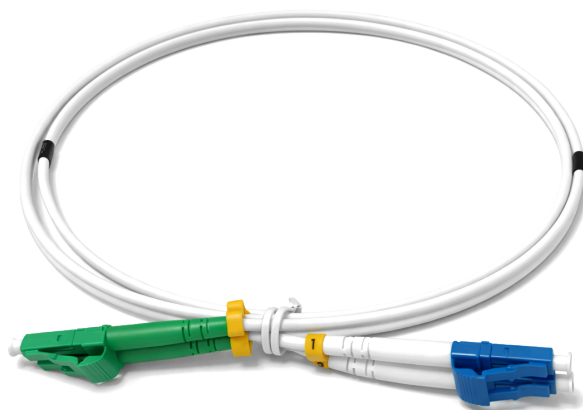

Overview

DATAWAY optical patchcord is factory terminated and tested, designed for reliable low-loss connection between optical distribution frames, patch panels, active equipment and FTTH access points. The G.657A2 bend-insensitive fiber supports compact routing inside cabinets while maintaining stable optical performance.

Key Features

- LC/APC to LC/UPC connector configuration
- Singlemode OS2, G.657A2 bend-insensitive fiber
- Duplex cable construction, 3.0 mm nominal cable diameter
- Suitable for ODF, data center, FTTH and telecom access applications
- Factory polished connectors and 100% visual/optical inspection basis

Technical Specifications

DATAWAY Optical Patchcord LC/APC - LC/UPC 1 m Duplex, SM, G.657A2

Ordering Information	Value
Part Number	DW-PC-LCA-LCU-657A2-DX-1
SKU	2421
EAN	8586026273434

Optical Performance	Specification
Fiber type	Singlemode OS2, ITU-T G.657A2
Connector A	LC/APC, 8 degree angled polish
Connector B	LC/UPC / LC/PC physical contact polish
Insertion loss	≤ 0.30 dB typical reference value
Return loss	APC ≥ 60 dB, UPC/PC ≥ 50 dB reference value
Operating wavelength	1310 nm / 1550 nm

Mechanical / Construction	Specification
Cable length	1 m
Fiber count	Duplex
Cable diameter	3.0 mm
Jacket	LSZH, indoor patchcord grade
Color	Yellow for singlemode patchcord
Minimum bend radius	Static ≥ 10 x cable OD, dynamic ≥ 20 x cable OD reference
Operating temperature	-20 °C to +70 °C reference

Published Product Parameters	Value
---	---
Fiber count	duplex
Cable diameter	3 mm