

DATAWAY

FIBER OPTIC PLC SPLITTER

DATAWAY PLC Splitter 1 x 8, 0.9 mm, SM G.657A1 (0.9mm 1m kábel), S

Mini-module PLC optical splitter for FTTH/FTTx passive optical distribution networks.

Product Identity

BRAND


DATAWAY

PART NO.

DW-PLC-1X8-SCA-SCA

EAN

8586026273168

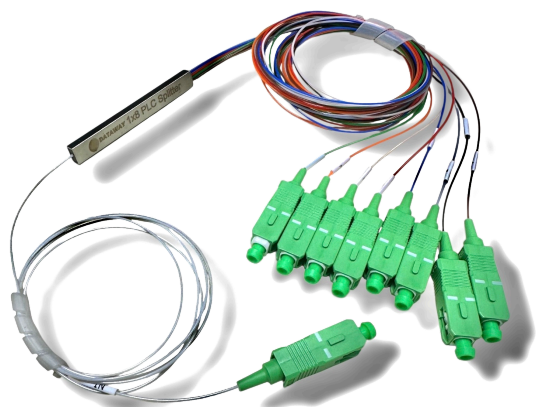

Overview

DATAWAY PLC splitter is designed for passive optical network signal distribution from one input fiber to multiple output fibers. The mini-module format supports compact installation in ODF, splice closures, distribution boxes and FTTH access networks.

Key Features

- 1 x 8 optical splitting configuration
- SM G.657A1 (0.9mm 1m kábel) bend-insensitive singlemode fiber
- SC/APC termination option
- Compact MINI steel module construction
- Broad 1260-1650 nm operating wavelength range

Technical Specifications

DATAWAY PLC Splitter 1 x 8, 0.9 mm, SM G.657A1 (0.9mm 1m kábel), SC/APC

Ordering Information		Specification
Part Number		DW-PLC-1X8-SCA-SCA
SKU		1711
EAN		8586026273168

Optical / Construction		Specification
Splitter type		PLC splitter, 1 x 8
Connector		SC / APC
Construction		alubox 55x7x4
Fiber type		SM G.657A1 (0.9mm 1m kábel)
Fiber diameter		900 um
Operating wavelength		1260-1650 nm

Application / Performance		Specification
Network type		FTTH/FTTx passive optical network
Operating temperature		-40 do +85 degrees C
Installation		ODF, distribution box, splice closure or access network cabinet
Reference insertion loss		<= 10.7 dB reference
Return loss		APC >= 60 dB reference when connectorized

Published Product Parameters		Specification
Split ratio		1 x 8
Connector		SC / APC
Construction		alubox 55x7x4
Fiber type		SM G.657A1 (0.9mm 1m kábel)
Operating wavelength		1260-1650 nm
Operating temperature		-40 do +85 degrees C