

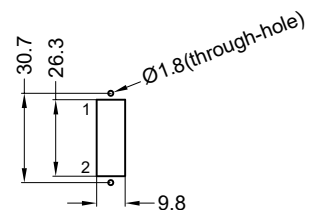


1U 24SC Duplex Sliding Empty Patchpanel

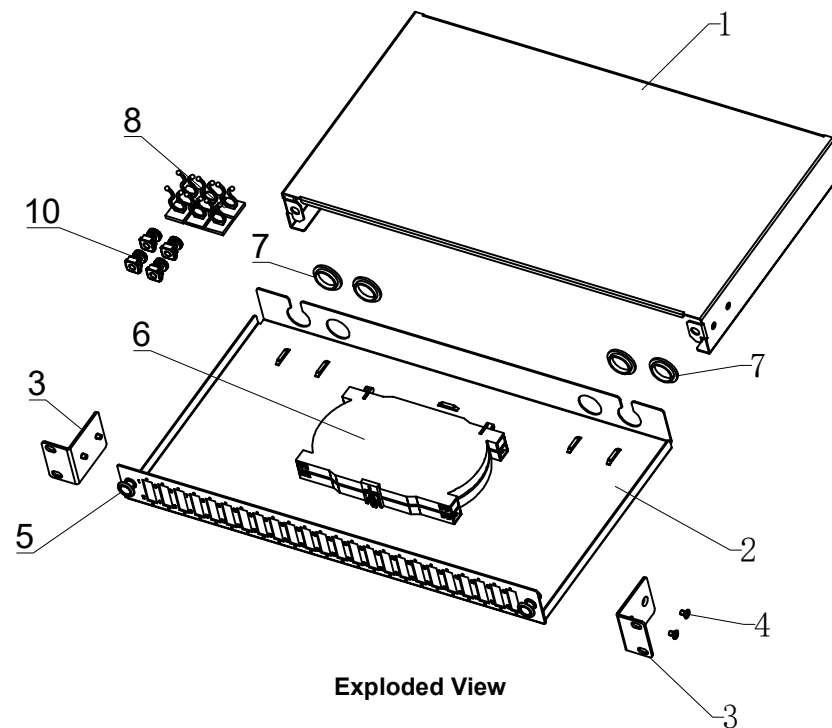

Detail A , 2:1
(Adapter installation size)

Provide self-tapping screws
with a tightening torque
range of 5-9 Nm

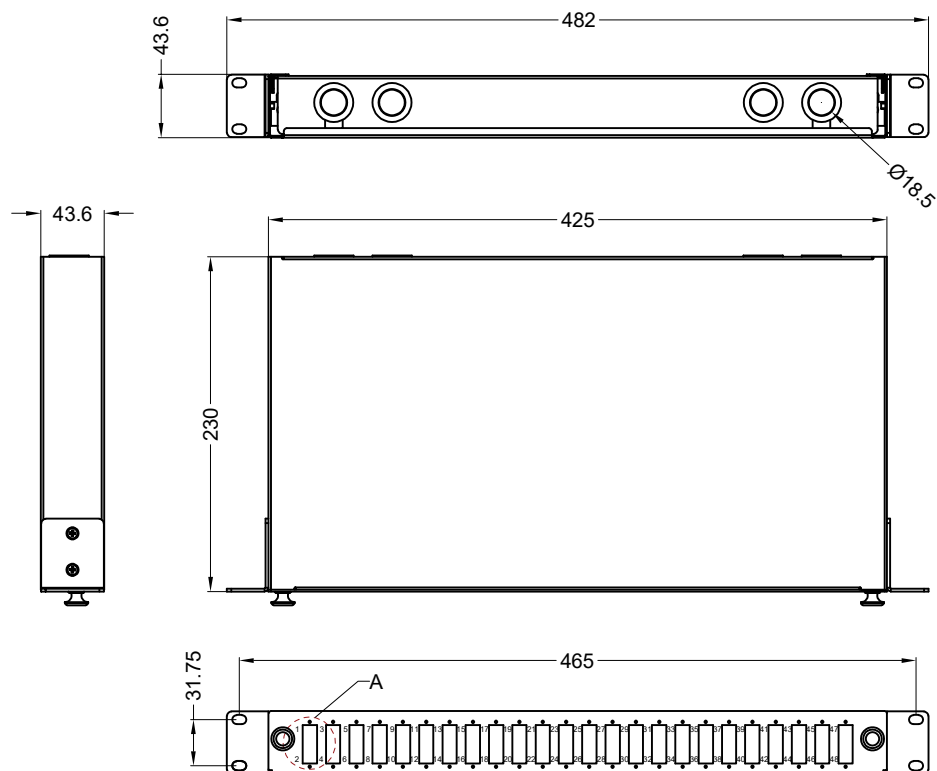

www.dataway.eu

10	Screw , M6X15	4
9	Self-tapping screw ,ST 2.0 (for adapter install)	48
8	Twist tie	6
7	Hole plug	4
6	Splice cassette	2
5	Nylon rivet	2
4	Screw , M4X6 (for fixed bracket)	4
3	Mounting bracket	2
2	Basedpalte (sliding)	1
1	Lid (fixed with bracket)	1
NO.	Description	Q,TY

Material: SPCC thickness 1.2mm
Surface: powder coating , Fine sand pattern
Colour: RAL 7035

Part No: DW-PP-19-24-SC-D

Drawing No:

Unit : mm

Page :1 of 1