


19" 1U Sliding Empty Fiber Patchpanel

(Ver. 1.0)

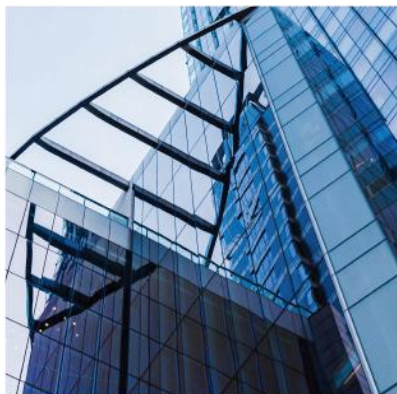

1、 Overview

The Fiber patch panel be installed in the 19"rack, It is used for the termination and distribution of the central office optical fiber cables in the optical fiber communication system, so as to conveniently connect, distribute and schedule the optical fiber lines. It plays an important role in the safe operation and flexible use of optical fiber communication network.

2、 Features

- ◆ Box body use cold-roll steel sheet with surface coating;
- ◆ Standard 19 inch installation;
- ◆ Easy for splicing、 wiring operation, and maintenance;
- ◆ Slide opening and closing structure;
- ◆ Reasonable optical fiber coiling structure;
- ◆ RAL7035 colors;
- ◆ Fours optical cable inlet holes on the back;
- ◆ Supports installation of SC, LC, E2000 fiber optic adapters;

3、 Main technical index



3.1 Service conditions

- 1) Work temperature: -20℃ ~+75℃
- 2) Storage temperature: -25℃ ~+85℃;
- 3) Relative humidity: ≤ 95% (+40℃)
- 4) Atmospheric: 68Kpa~112Kpa;


3.2 Mechanical property

- 1) Hosing material: SPCC , thickness 1.2mm
- 2) Dimensions: 482×230×43.6mm
- 3) Color: RAL 7035
- 4) Number of cable entry holes: 4
- 5) Number of fiber splicing tray: 1 or 2


4、Product Structure

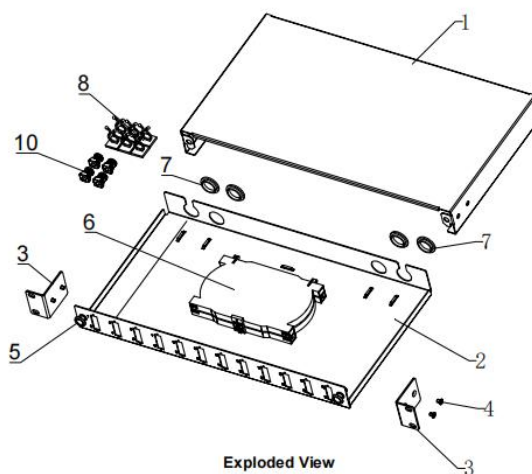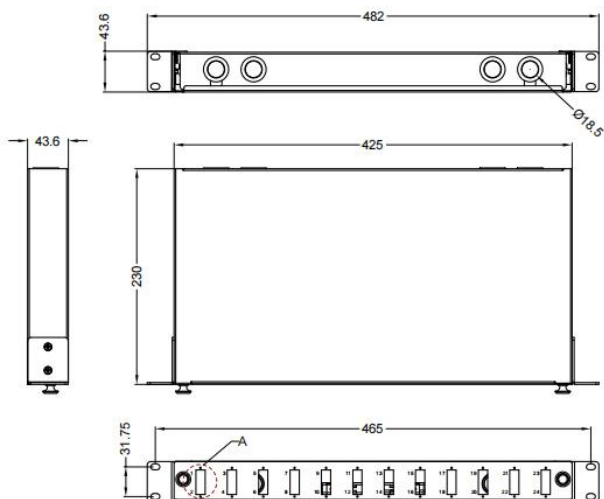


12SC Simplex Face Faceplate

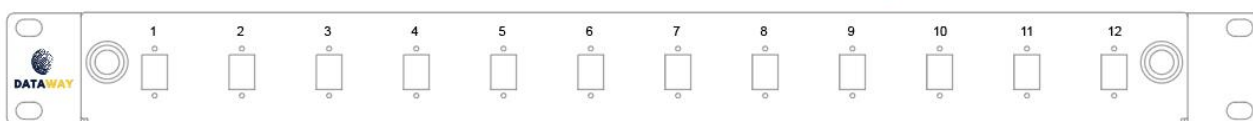


24SC Simplex Faceplate

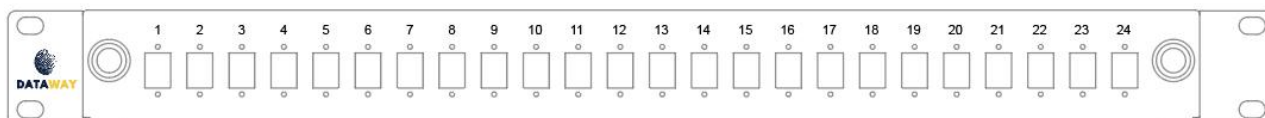

12SC Duplex Faceplate

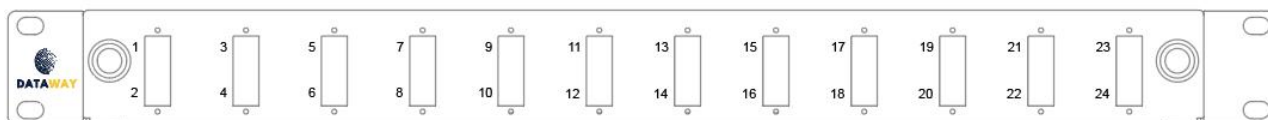

24SC Duplex Faceplate

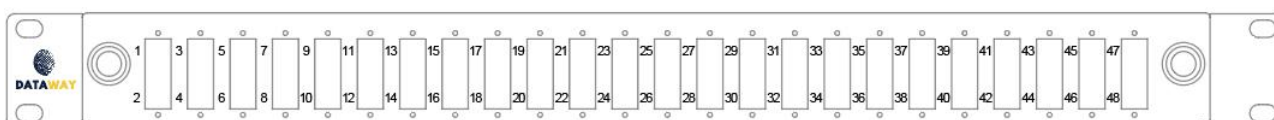

5. Product Configuration

No.	Part name	Spec	Unit	Qty.	Remark
1	Lid	425×230×43.6mm , SPCC , T=1.2mm , RAL7035	PCS	1	
2	Sliding Plate	425×228×42mm , SPCC , T=1.2mm , RAL7035	PCS	1	4 Types for adapter holes
3	Bracket	SPCC, T=1.5mm	PCS	2	
4	Nylon rivet	PA66, Black	PCS	2	
5	Splice Tray	ABS, Max. capatiy 24F	PCS	1 or 2	24 holes plate with 2 tray ; 12 holes plate with 2 tray
6	Nylon Cable tie	Nylon tie , 2*100mm	PCS	6	
7	Hole plug	ABS, Black		4	
8	Twis tie	PA66		6	
9	Screw	M4×6, zincification	PCS	4	For fixed bracket
10	Screw&floating nut	M6×15, zincification	SET	4	For fixed patchpanel
11	Self-tapping Screw	ST2.0×6, zincification	PCS	24 or 48	For fixed Fiber adapter; 24 holes plate with 48 ; 12 holes plate with 24
12	Graphic carton	498*255*50mm	pcs	1	

6. Product Info

No.	PN.	Description	Qty of Holes	Weight	Applicable adapter type
1	DW-PP-19-12-SC-S	1U Sliding empty fiber patchpanel with 12 SC Simplex holes , RAL7035	12	2.67kg	SC simplex adapter or LC duplex adapter
2	DW-PP-19-24-SC-S	1U Sliding empty fiber patchpanel with 24 SC Simplex holes , RAL7035	24	2.67kg	SC simplex adapter or LC duplex adapter
3	DW-PP-19-12-SC-D	1U Sliding empty fiber patchpanel with 12 SC Duplex holes , RAL7035	12	2.67kg	SC duplex adapter or LC quad adapter
4	DW-PP-19-24-SC-D	1U Sliding empty fiber patchpanel with 24 SC Duplex holes , RAL7035	24	2.67kg	SC duplex adapter or LC quad adapter