


Fiber Optic Splice Closure DW-FODC-144

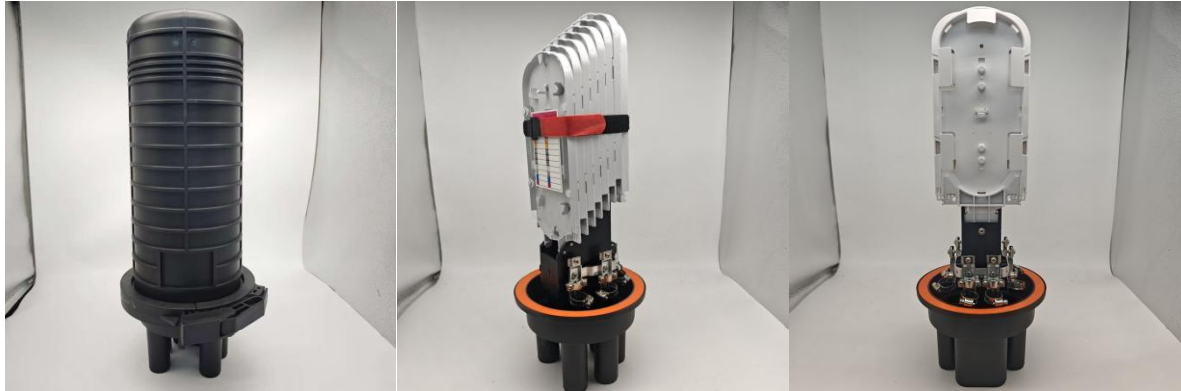

Description

The Model DW-FODC-144 is mainly used for optical fiber connection and protection. This kind of box is suitable for the connection of overhead, pipe and buried straight and branch. The box body and base are sealed with hoops and rubber. The closure casing is made of quality engineering plastics, and of good performance of anti-erosion against acid and alkali salt, anti-aging, as well as smooth appearance and reliable mechanical structure. The mechanical structure is reliable and has the performance of resisting wild environment and intensive climate changes and serious working environment. The splice trays (FOST) inside the closure are turn-able like booklets, and have adequate curvature radius and space for winding optical fiber to make sure the curvature radius for optical winding 40 mm. Each optical cable and fiber can be operated individually. The product can be opened again and reused after installation.

Product Specifications

Item	Fiber Optic Splice Closure 1IN-4OUT
Dimension	460*190mm (Φ145mm for enclosure body)
Material	PP+GF
Weight	2kg
Diameter of Cable	IN:8-26-60 OUT: 6-25 (mm)
No. of Cable Inlet/Outlet	1IN-4OUT
Number of Fibers per Tray	24 (single core)
Max. Number of Trays	6
Max. Number of Fibers	144 (single core)
Sealing of Inlet/Outlet ports	Heat shrinkable sealing
Sealing of Shells	Rubber seal ring
UV Testing	Yes , 1000H (outdoor life 10years)
Working Temperature	-40deg.C~60deg.C
Protection Grade	IP68

Ordering Information

Code Name	Capacity (single core)	Description
DW-FODC-96	24Core	Fiber Optic Closure 1IN-4OUT 96Core
DW-FODC-144	24Core	Fiber Optic Closure 1IN-4OUT 144Core

Product physical drawing



Type of installation



Accessories for wall mounted and pole mounted are not included as standard and require additional costs.

Packing Info:

Carton packing: 6 sets/carton

Carton size: 60*48*51cm

Weight: 17.3kg/carton



Accessories Included package

