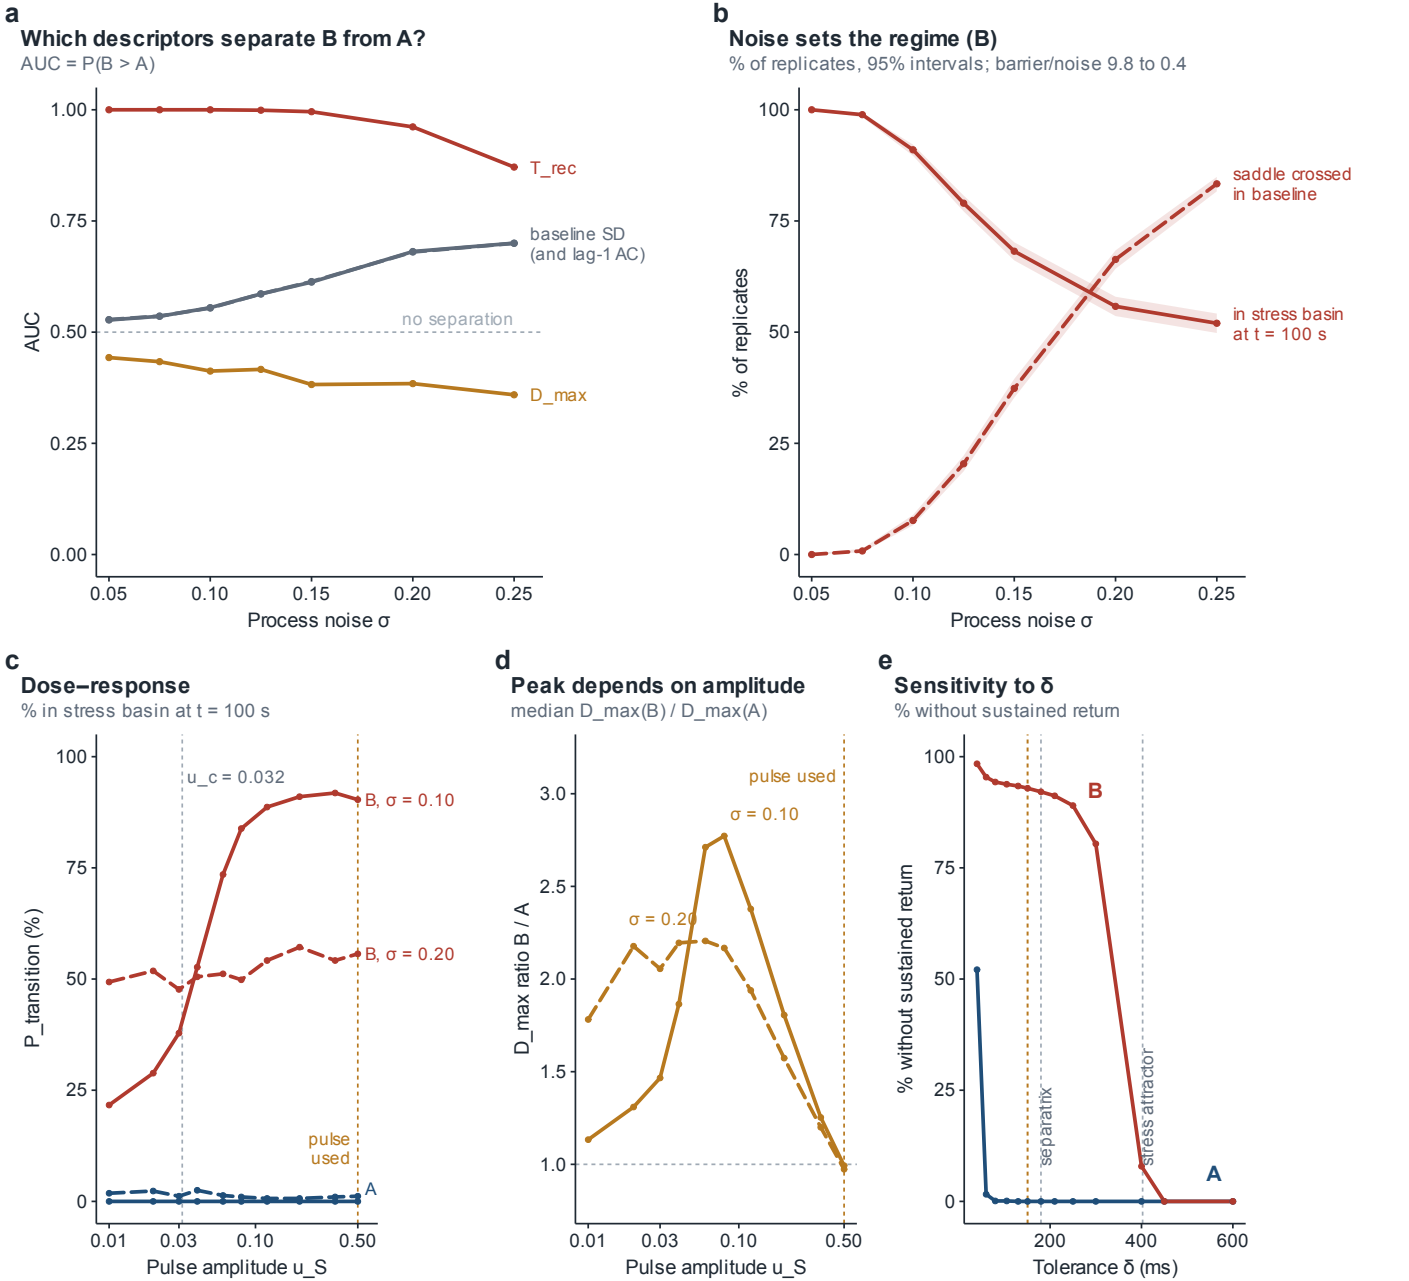

a
Which descriptors separate B from A?
AUC = P(B > A)
AUC
Process noise σ
T_rec
baseline SD
(and lag-1 AC)
no separation
D_max
b
Noise sets the regime (B)
% of replicates, 95% intervals; barrier/noise 9.8 to 0.4
% of replicates
Process noise σ
saddle crossed
in baseline
in stress basin
at t = 100 s
c
Dose–response
% in stress basin at t = 100 s
P_transition (%)
Pulse amplitude u_S
u_c = 0.032
B, σ = 0.10
B, σ = 0.20
pulse
used
A
d
Peak depends on amplitude
median D_max(B) / D_max(A)
D_max ratio B / A
Pulse amplitude u_S
pulse used
σ = 0.10
σ = 0.20
e
Sensitivity to δ
% without sustained return
% without sustained return
Tolerance δ (ms)
B
A
separatrix
stress attractor