

Flow of Newtonian Fluid through a Tesla Valve

Final project for Computer Solutions of Continuum Physics
Problems

Matěj Vais

August 28, 2024

Contents

- 1 Short Introduction to the Project
- 2 Coding
- 3 Results
- 4 Conclusion and References

Short Introduction to the Project

What Is a Tesla Valve?

- passive fixed geometry check valve
- suppresses the flow of fluid in the reverse direction (\rightarrow)
- pressure drop in reverse (\rightarrow) direction higher than in the forward direction (\leftarrow)




Figure: Cross-section of the valve [1].

Aims of the Project

- ✓ creation of mesh in the shape of the valve
- ✓ simulating a steady flow through the valve
- ✓ simulating a time-dependent flow
- ✓ computing the diodicity of the valve [2]
- ✗ automatic generation of the mesh from an image [3]

$$\text{Di} = \left(\frac{\Delta p_r}{\Delta p_f} \right)_Q$$

Stationary Navier-Stokes Equation

- Steady flow of an incompressible fluid

$$\begin{aligned}\rho \operatorname{div}(\mathbf{v} \otimes \mathbf{v}) &= -\nabla p + \operatorname{div}(2\nu \mathbb{D}) \quad \text{in } \Omega, \\ \operatorname{div} \mathbf{v} &= 0 \quad \text{in } \Omega,\end{aligned}$$

$\Omega \subset \mathbb{R}^2$ is an open connected set representing a canal

ρ given constant density

μ given constant dynamic viscosity

$\mathbb{S} = 2\mu \mathbb{D}$ shear stress

\mathbb{D} symmetric part of the velocity gradient

- Unknowns: pressure, velocity (p, \mathbf{v}) or pressure, velocity, stress $(p, \mathbf{v}, \mathbb{S})$.

Navier-Stokes equation

- Unsteady flow of an incompressible fluid

$$\begin{aligned}\frac{\partial \vec{v}}{\partial t} + (\nabla \vec{v}) \vec{v} - \operatorname{div}(2\nu \mathbb{D}) + \nabla p &= 0 \quad \text{in } \Omega, \\ \operatorname{div} \vec{v} &= 0 \quad \text{in } \Omega.\end{aligned}$$

- Unknowns: pressure p and velocity \mathbf{v} .

Initial and Boundary Conditions

- The boundary is partitioned as $\partial\Omega = \Gamma_{\text{in}} \cup \Gamma_{\text{out}} \cup \Gamma_{\text{wall}}$.
- We impose the following boundary conditions on \mathbf{v} :

$$\begin{aligned}\mathbf{v} &= 0 && \text{on } \Gamma_{\text{wall}} \text{ (wall of the canal),} \\ \mathbf{v} &= \mathbf{g} && \text{on } \Gamma_{\text{in}} \text{ (inlet),} \\ (\mathbb{T}\mathbf{n})_n &= 0 && \text{on } \Gamma_{\text{out}} \text{ (outlet).}\end{aligned}$$

- As an initial condition of the time-dependent problem we use the steady solution.


Coding

How Did I Progress?

- automatic mesh generation from an image unsuccessful
- Netgen proved to be a better option
- solving the steady flow using mixed formulation but no pressure drop
- moving to Navier-Stokes which showed the expected pressure drop
- solving the steady flow using velocity-pressure formulation, again no pressure drop
- increased the Reynolds number \Rightarrow difference in pressure drops between forward and reverse mode

Note: ChatGPT very useful for code translation from FEniCS to Firedrake and for debugging.

netgen_mesh() – The Most Challenging Part

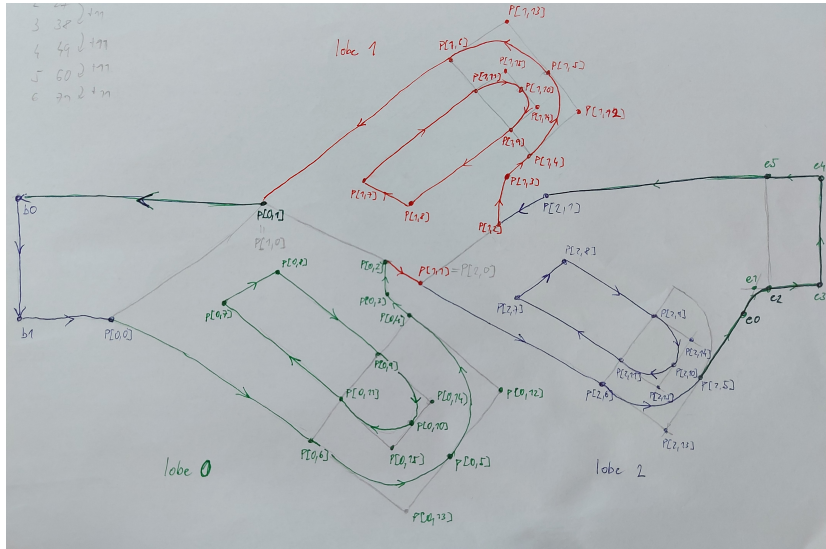

Results

Velocity

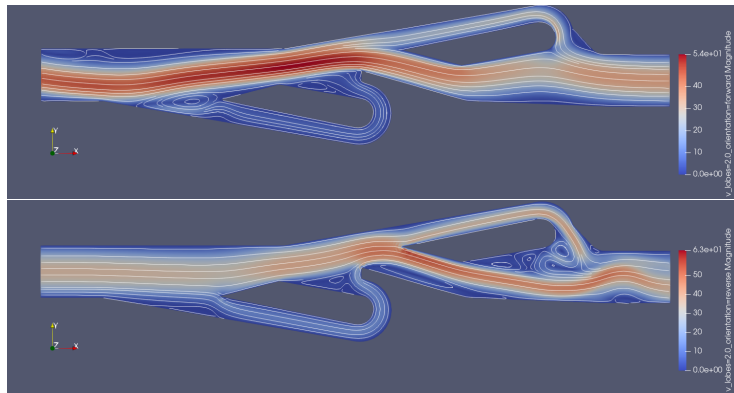


Figure: The top picture shows the forward mode (\leftarrow), the bottom picture shows the reverse mode (\rightarrow), both at $t = 20$ and $Re = 685.9$.

Pressure

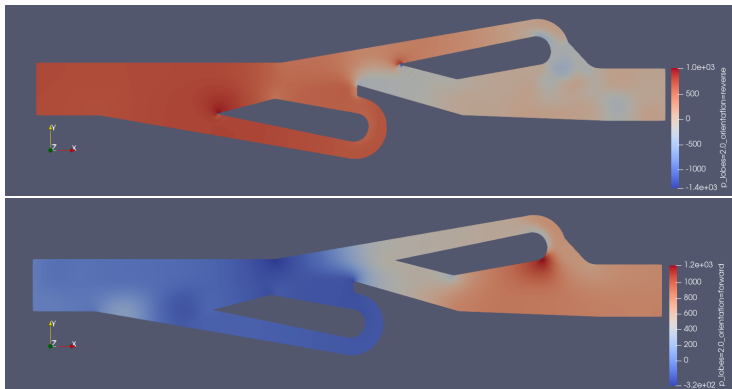


Figure: The top picture shows the reverse mode (\rightarrow), the bottom picture shows the forward mode (\leftarrow), again at $t = 20$ and $\text{Re} = 685.9$.

Pressure Drop

Lobes	Mode	Pressure Drop	Diodicity
2	reverse	722	0.95
	forward	763	
4	reverse	2141	1.40
	forward	1530	
6	reverse	3123	1.48
	forward	2116	
8	reverse	5600	2.08
	forward	2686	

Table: Pressure drop for valves of different length at $t = 20$ and $\text{Re} = 685.9$. Note that t was chosen arbitrarily and different choice would produce slightly different results.

Possible Problems

- pressure may have a singularity in the corners of the domain
- solution oscillations visible for higher Reynolds number

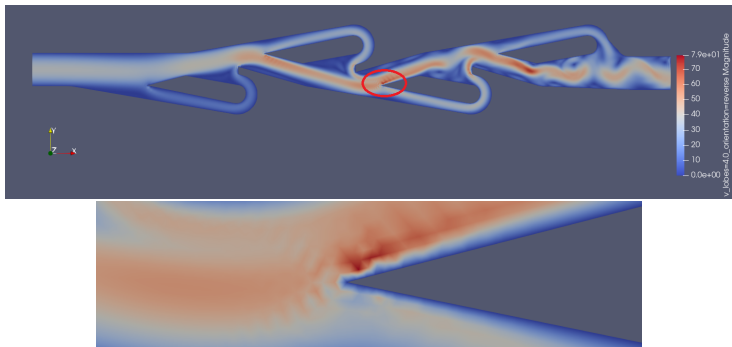


Figure: Velocity at $t = 20$, $Re = 685.9$, reverse mode (\rightarrow). We can see the velocity spike and produce “ripples” around sharp corners.

Conclusion

Solved problems:

- ✓ mesh generation using Netgen
- ✓ computing the steady flow
- ✓ computing the time-dependent flow
- ✓ the valve shows diodicity greater than 1

Unsolved problems:

- ✗ automatic mesh generation from an image

References

- [1] Nikola Tesla. Tesla valve cross-section.
<https://patents.google.com/patent/US1329559>. 1920.
- [2] Tesla valve – diodicity.
https://en.wikipedia.org/wiki/Tesla_valve#Diodicity.
- [3] Nanomesh documentation.
<https://nanomesh.readthedocs.io/en/latest/>.