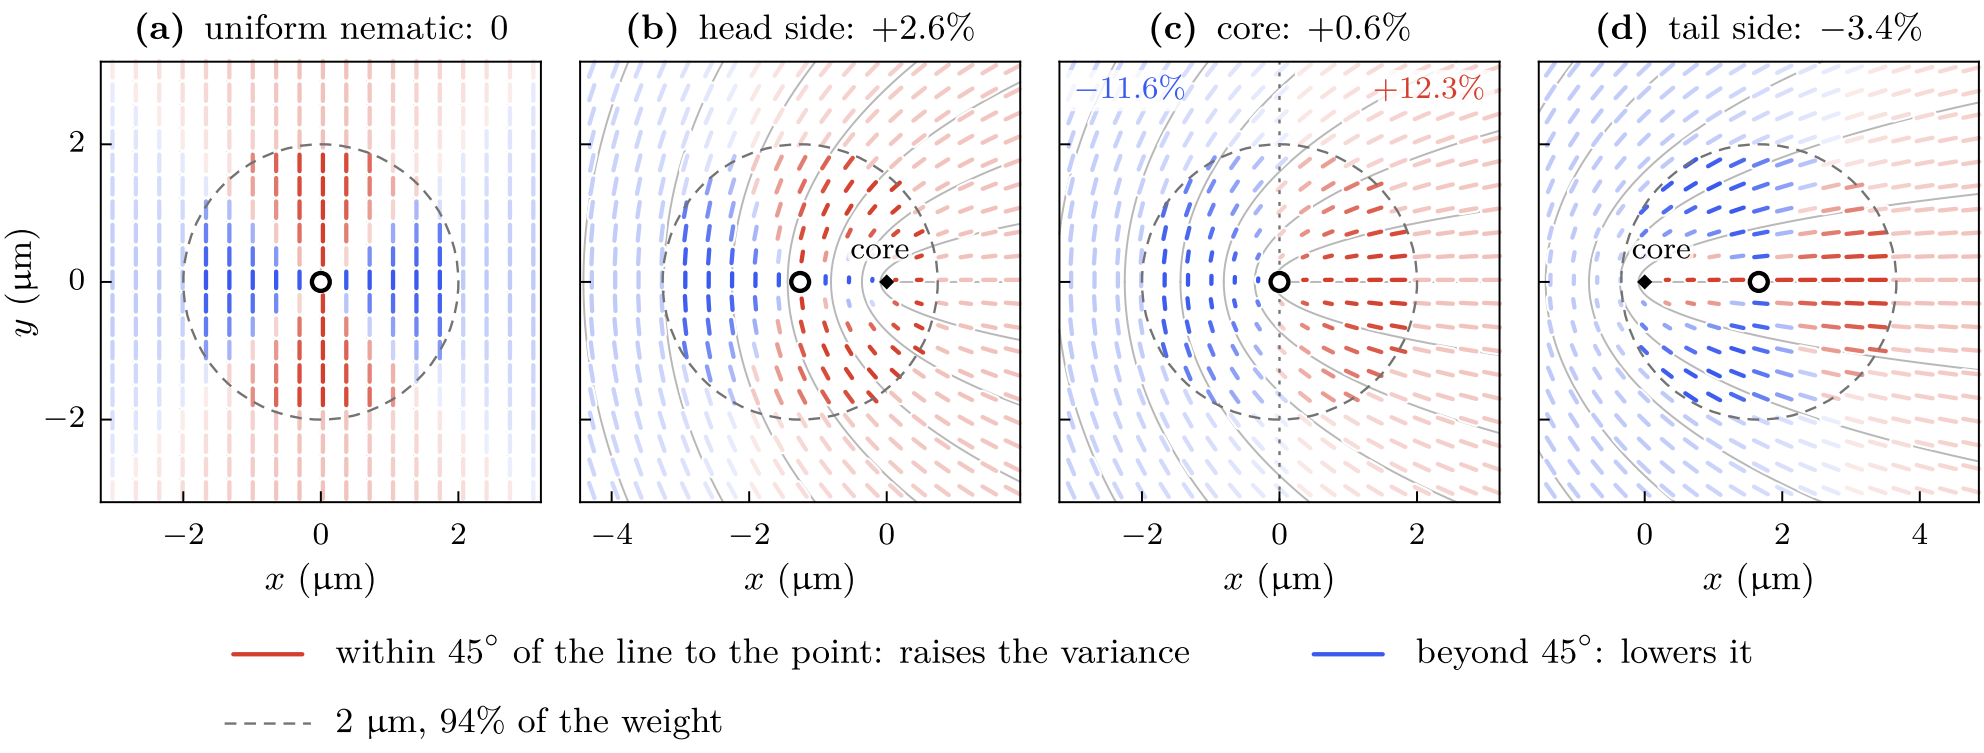

(a) uniform nematic: 0
(b) head side: +2.6%
(c) core: +0.6%
(d) tail side: −3.4%
−11.6%
+12.3%
core
core
y (µm)
x (µm)
x (µm)
x (µm)
x (µm)
within 45° of the line to the point: raises the variance
beyond 45°: lowers it
2 µm, 94% of the weight