

# **Implementation of a Total Power Radiometer in Software Defined Radios**

by

Matthew Erik Nelson

A thesis submitted to the graduate faculty  
in partial fulfillment of the requirements for the degree of  
MASTER OF SCIENCE

Major: Computer Engineering (Embedded Systems)

Program of Study Committee:

Phillip H Jones, Major Professor

John Basart

Mani Mina

Iowa State University

Ames, Iowa

2014

Copyright © Matthew Erik Nelson, 2014. All rights reserved.

## DEDICATION

I would like to dedicate this thesis to my wife Jennifer who has stood by me through this long journey towards my Masters. I would also like to thank my parents without whose support I would not have been able to complete this work.

I would also like to thank my friends and family for their continued support and constant encouragement.

## TABLE OF CONTENTS

<b>LIST OF TABLES</b> . . . . .	vi
<b>LIST OF FIGURES</b> . . . . .	vii
<b>ACKNOWLEDGEMENTS</b> . . . . .	ix
<b>ABSTRACT</b> . . . . .	x
<b>CHAPTER 1. BACKGROUND</b> . . . . .	1
1.1 Introduction . . . . .	3
1.1.1 Software Defined Radios . . . . .	4
1.1.2 GNURadio Software . . . . .	6
1.1.3 Current ISU Radiometer . . . . .	6
1.1.4 Related Works . . . . .	8
<b>CHAPTER 2. THEORY OF OPERATION</b> . . . . .	10
2.1 Traditional Radiometer Theory of Operation . . . . .	11
2.1.1 Measuring RF power . . . . .	11
2.2 ISU Radiometer Theory of Operation . . . . .	14
2.2.1 Existing ISU Radiometer RF Front End . . . . .	15
2.3 Software Defined Radio Theory of Operation . . . . .	18
2.3.1 General Specifications . . . . .	22
2.4 A Software Defined Radio Radiometer Theory of Operation . . . . .	24
2.4.1 Hardware . . . . .	24
2.4.2 Software . . . . .	26
2.5 Comparison of a Software Defined Radio Radiometer vs Traditional Radiometer	29
2.6 Comparison of a Software Defined Radio Radiometer and ISU Radiometer . . .	29

<b>CHAPTER 3. Implementation of a Software Defined Radio Radiometer . . .</b>	<b>31</b>
3.1 Requirements . . . . .	31
3.1.1 Hardware Requirements . . . . .	31
3.1.2 Software Requirements . . . . .	32
3.2 Power detection . . . . .	33
3.3 Integrator through a IIR Filter . . . . .	34
3.4 GNURadio Blocks . . . . .	35
3.5 Control of the SDR Hardware through GNURadio . . . . .	35
3.6 GNURadio Data Handling . . . . .	36
3.6.1 GNURadio Data Display . . . . .	37
3.6.2 GNURadio Data Processing . . . . .	38
<b>CHAPTER 4. Experimental Setup . . . . .</b>	<b>39</b>
4.1 Square-law Detector . . . . .	39
4.1.1 Analog Devices ADL5902 . . . . .	40
4.1.2 Data acquisition and storage . . . . .	40
4.1.3 Tests on the ADL5902 . . . . .	43
4.2 Software Defined Radio tests . . . . .	44
4.3 Total Power Radiometer Test with Ice Water Bath . . . . .	44
4.3.1 Laboratory Setup . . . . .	45
4.3.2 Test Results . . . . .	45
4.4 Liquid Nitrogen Test . . . . .	45
4.4.1 Testing Apparatus . . . . .	46
4.4.2 Calibration and verification experiment . . . . .	46
4.5 Testing with an injected noise source . . . . .	47
4.5.1 Test setup . . . . .	48
4.5.2 Test results . . . . .	48
4.6 Further testing . . . . .	48

<b>CHAPTER 5. PERFORMANCE AND EVALUATION . . . . .</b>	<b>50</b>
5.1 Performance of a radiometer . . . . .	50
5.1.1 Sensitivity . . . . .	50
5.1.2 Accuracy and Stability . . . . .	51
5.2 Required Performance Requirements . . . . .	52
5.3 Square-law Detector Performance . . . . .	52
5.4 Software Defined Radio Performance . . . . .	53
<b>CHAPTER 6. Conclusion and Future work . . . . .</b>	<b>54</b>
6.1 Conclusion . . . . .	54
6.2 Future work . . . . .	54
6.2.1 Improving on the FPGA firmware . . . . .	55
6.2.2 Correlation . . . . .	55
6.2.3 Improving stability with a feedback loop . . . . .	56
<b>APPENDIX A. Source code . . . . .</b>	<b>58</b>
<b>APPENDIX B. EE 518 Test Results . . . . .</b>	<b>96</b>
B.0.4 Test setup . . . . .	97
B.0.5 Lab Experiment . . . . .	98
B.0.6 Lab Results . . . . .	98
<b>APPENDIX C. Direct-Sampling Digital Correlation Radiometer . . . . .</b>	<b>99</b>
C.0.7 Implantation in the ISU Radiometer . . . . .	99
<b>BIBLIOGRAPHY . . . . .</b>	<b>100</b>

**LIST OF TABLES**

Table 3.1	ISU Radiometer requirements . . . . .	32
Table 4.1	ADL5902 Specifications . . . . .	40
Table 5.1	Required Radiometer performance . . . . .	52

## LIST OF FIGURES

Figure 1.1	Block diagram of the N200 SDR . . . . .	5
Figure 1.2	Inside the ISU Radiometer showing the FPGA, micro-controller and one of the RF front ends . . . . .	7
Figure 2.1	The ideal radiometer block diagram . . . . .	12
Figure 2.2	A more realistic radiometer model . . . . .	13
Figure 2.3	A total power radiometer . . . . .	14
Figure 2.4	A block diagram provided by the University of Michigan that shows the components used in the ISU radiometer's RF front end. . . . .	15
Figure 2.5	A screenshot taken from a spectrum analyzer showing the filters and amplification done by the ISU Radio RF front end. . . . .	16
Figure 2.6	A screenshot taken from a spectrum analyzer showing the affect of the radiometers lid as it was placed on the radiometer. . . . .	17
Figure 2.7	A simple RC circuit . . . . .	19
Figure 2.8	The USRP N200 from Ettus Research . . . . .	22
Figure 2.9	The DBSRX2 daughter board from Ettus Research . . . . .	26
Figure 2.10	Screenshot of the GNURadio Companion editor and the N200 Radiometer block diagram used in many of the experiments . . . . .	28
Figure 3.1	A block diagram showing how the radiometer performs the equivalent square law detector in software. . . . .	34
Figure 3.2	A screenshot of the interface made for communication with and controlling the software defined radio . . . . .	36

Figure 3.3	A screenshot showing the ticker tape display for the total power readings. In addition raw and calibrated noise temperature is shown below.	38
Figure 4.1	A screenshot of the Labview GUI interface . . . . .	41
Figure 4.2	A screenshot of the Labview block diagram . . . . .	42
Figure 4.3	Graph showing the linearity of the ADL5902 . . . . .	44
Figure 4.4	Graph showing both the square-law detector and the software defined radio total power readings. . . . .	47
Figure 6.1	The key blocks used for creating a correlating radiometer in software. The key blocks is the USRP source, which allows us to address both daughter-boards and the ADD block which sums the signals. . . . .	56
Figure B.1	Students rotating the radiometer for an experiment on Agronomy Hall	97



## ACKNOWLEDGEMENTS

I would like to take this opportunity to express my thanks to those who helped me with various aspects of conducting research and the writing of this thesis. First and foremost, Dr. Phillip Jones for his guidance, patience and support throughout this research and the writing of this thesis. I would also like to thank Dr. John Basart who patiently spent many hours with me going over both the fundamentals and details with radiometers. I would like to thank Dr. Brian Hornbuckle for his continued support and for allowing me to utilize his radiometer, lab and students towards my research. Finally I would like to thank Dr. Mani Mina who not only was instrumental in my undergraduate career but continued his support into my graduate path as well. If it was not for Dr. Mina hiring me as the Chief Engineer of the Spacecraft Systems and Operations Lab, I would not be here today.

## ABSTRACT

A software defined radio is defined as a communication system where components of a communication system that are typically done in hardware are now done in software. The result is a highly flexible communication system that can adapt to changes to the system based on requests by the user or due to conditions in the radio frequency channel. Software Defined Radios (SDRs) have been used for a variety of applications, mostly in the area of communications. However, they have not been widely applied to remote sensing applications such as a radiometer. A SDR based radiometer offers a very flexible and robust system more so than a more traditional radiometer which has fixed hardware and usually little room for flexibility and adaptability based on the needs of the radiometer application or due to changes in the radiometers environment. The price of SDRs have also been steadily dropping making implementing them into radiometers a more attractive option compared to using traditional RF hardware. In this thesis we will look into the feasibility and theory of using an off the shelf SDR hardware platform for a radiometer application. In addition, we will look into how we can use the GNURadio software to create a total power radiometer within software and how this software can be used to make easy changes to the functionality of the radiometer. Finally we will look at the preliminary results obtained from laboratory tests of the SDR radiometer system.

## CHAPTER 1. BACKGROUND

**Software Defined Radios.** Software Defined Radios (SDRs) have been used for a variety of applications, but their primary application has been in the area of communications. They appeal to applications where being able to change a modulation scheme or filter on the fly is desirable. In these areas, SDRs often outperform a traditional hardware only radio with their ability to rapidly change their operations by simply changing their software. Early SDRs were expensive due to high costs in the A/Ds needed and in the Field Programmable Gate Arrays (FPGA) used. In recent years however, the cost of SDRs have decreased due to the cost of these key components decreasing in cost as well. Even though the cost has gone down, the performance of many SDRs have increased. This has lead to new applications for SDRs being developed and using SDRs in new and different ways.

The basic concept behind a SDR is that it will digitize the RF signal as soon as possible. Once digitized, it can now be evaluated by a computer, FPGA, or a dedicated System on Chip (SoC). A canonical software radio architecture is one that consists of a power supply, antenna, multi-band RF converter, and a single chip that contains the needed processing and memory to carry out the radio functions in software [Mitola (May)]. This allows us to extract certain hardware functions, such as filtering, into the digital domain which can then be manipulated by software. Since software is now manipulating the signal, we can rapidly change what functions we execute on the signal by changing the software. This gives SDRs a high amount of flexibility as various components that are normally done in hardware can now be done in software and can be changed by simply uploading new software or firmware to the system.

**Radiometers.** Radiometers are radio receivers that simply listen to and record the amount of power received. However, the power received is not a coherent signal, instead it is the amount of noise the radiometer sees. Radiometers at the basic level, listen to noise that is generated

naturally from a source. In our case, we will specifically be looking at the soil and the amount of power we receive correlates to how much moisture is in the ground. However, radiometers have also been used to measure ocean salinity and to measure stellar objects in radio astronomy.

The amount of noise that is generated is due to the thermal agitation of the charge carriers, usually the electrons, which is directly correlated to the physical temperature of the source[Nyquist (1928)]. This correlation is done as a noise temperature. The brighter or warmer the noise temperature is, the more RF noise that has been received which correlates to a drier soil. The less RF noise power received, the cooler the noise temperature and this indicates wetter soil area. Radiometers such as these are already in service on satellites such as the Soil Moisture and Ocean Salinity (SMOS) satellite launched by the European Space Agency (ESA) and are used by scientists to monitor the Earth's soil moisture and ocean salinity[Liu et al. (2013)][McMullan et al. (arch)].

A traditional radiometer uses several Low Noise Amplifiers (LNAs) and filters and the power is often measured using a square law detector. Even though we are measuring noise, we want to measure the right noise and we want the noise generated by the radiometer hardware itself to be as low as possible. In other words, we are really listening to the noise being generated from an outside source. Additional noise in the system is impossible to eliminate, however we can take steps to reduce it as much as possible. In addition, we can calculate what this noise is and take steps to account for it in our measurements. However, this means that stability is another factor within the radiometer. If the noise generated within the radiometer is constantly changing, this makes it difficult to account for this additional noise. There are steps we can take to work with this though. A traditional method often used is the Dicke radiometer which switches between the measurement of the antenna and a known sourceDicke (Jul). By referencing this known source the Dicke radiometer can calibrate and account for any drift due to variations in the system. Another method is to use highly stable components and keep them stable during the operation of the radiometer. For LNAs, temperature directly effects the overall gain from the LNA. In some radiometer applications we can control the temperature which allows us to keep the LNAs stable during the operation. It is this approach that the current ISU radiometer uses by using thermal electric coolers (TEC) that regulate the temperature of the LNAs to keep

them stable.

**ISU Radiometer.** Iowa State University currently owns a 1.4 GHz, dual polarization, correlating radiometer. This radiometer is currently in use by Dr. Brian Hornbuckle and his research team. However, in recent years the ISU radiometer has not performed as expected and it was determined that the radiometer should be rebuilt using newer technologies.

The ISU Radiometer was built at the University of Michigan and put into service at ISU in 2006. The ISU radiometer is unique in that it is one of the few direct sampling radiometer Erbas et al. (2004). This radiometer takes the RF signal, amplifies and filters the signal, and then sends it directly to an analog to digital converter. At the time the ISU radiometer was built, an A/D that could sample accurately at 1.4 GHz were expensive and hard to come by due to the fact that Nyquist's theorem states that we must sample at least two times the frequency. However, the ISU radiometer does not sample at 2.8 GHz or above, instead it samples at 1.4 GHz. The reason the ISU radiometer can do this is due to the fact that a radiometer is generally only interested in the power of the incoming signal. This means that we are not interested in recreating the entire signal and therefore we can under-sample the signal. The A/D data is then sent to a Field Programmable Gate Array (FPGA) which then processes the data. The ISU radiometer is also a correlating radiometer, which means that it looks at both the V-polarization and the H-polarization and then correlates this information [Fischman (2001)].

The problem with this approach however is that we do lose information, specifically any spectral information is lost. Although the general purpose of a radiometer is to measure power, we lose the ability to analyze in full detail other parts of the signal coming in. One such application is to know if we have any interference signal that could alter the received power being measured. Without having the frequency information, there is no way to tell if such a signal is present.

## 1.1 Introduction

The goal of this thesis is to explore other methods that could be used for a remote sensing radiometer. The end goal is to develop a radiometer that is more flexible than most radiometers

and still maintain the accuracy and stability of a traditional radiometers if not exceed these specifications. A secondary goal was to use off the shelf components and components that are generally more accessible. This would allow radiometers to be more accessible to a wider scope of researchers in this field. And finally a tertiary goal was to ensure that the system as a whole is fairly easy to use. This ties to our secondary goal of making radiometers more accessible to a wider range of researchers and research topics.

As stated in the background, ISU currently owns a radiometer that is used for the remote sensing of soil moisture. In many ways, the current ISU radiometer is like a SDR. The RF signal is digitized and then processed by a FPGA to give the total power reading needed for radiometry. However, due to the under-sampling of the signal some information is lost. The ISU radiometer assumes that incoming signal is free of any interference and the power recorded is from the target of interest. However, in recent years the ISU radiometer has not been performing as expected, and without additional information it is almost impossible to diagnose these issues out in the field. The ISU radiometer is also not frequency agile, it is fixed at 1.4 GHz and the bandwidth is also fixed at 20 MHz. All of this means that if an interfering signal is present the current radiometer would not be able to determine this and even if it could, it has no means to try to avoid the signal.

This thesis looks to explore the following questions: (1) Can we use a SDR along with GNURadio to recreate a radiometer in software? (2) If so, what performance can we get from the system? (3) What benefits do we gain (if any) from using a SDR from a more traditional radiometer? The results of this research and experimentation are the subject of this thesis.

### **1.1.1 Software Defined Radios**

Although a Software Defined Radio uses software to do the bulk of the signal processing, some hardware is still needed. Specifically hardware is needed to capture the signal and digitize it. A FPGA is often used to process the signal before passing it to a computer for further processing however in some cases a FPGA or a System on a Chip may do all the processing of the signal.

**N200 SDR** The equipment that was selected for researching into this topic was the Ettus

Research Group N200 SDR. This SDR uses daughter boards as the RF front end to the SDR and up to two daughter boards may be installed into a N200. This is an important consideration as one of the requirements is to be able to look at both the V-polarization and the H-polarization signal coming from the antenna. This allows us to correlate the signal and other signal analysis can also be done. Another important reason the N200 was selected was due to the fact that it can handle up to 50 MHz of bandwidth to the computer. This means that it is very possible to have two receive cards that can stream up to 25 MHz bandwidth each.

The N200 utilizes a flexible architecture for a variety of RF interface systems based on the frequency range desired and if receive and/or transmission is needed. These daughter boards directly receive the RF signal and then outputs the analog I and Q signals that are then sampled by the N200 A/D converter for reception or receives the I and Q values from the N200 D/A converter for transmission.

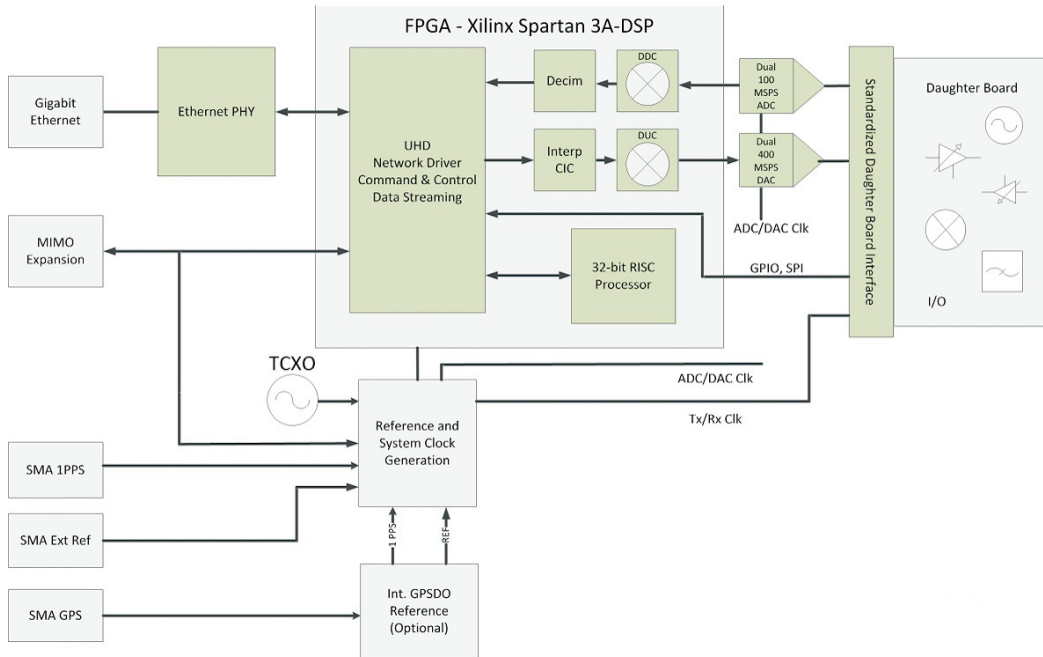


Figure 1.1 Block diagram of the N200 SDR

The daughter board selected was the DBSRX2 card. This card is a receive only card that operates between 800 MHz and 2.4 GHz and would thus work in the 1.4 GHz band we are interested in. The DBSRX2 also has built in amplification that is adjustable through software.

### 1.1.2 GNURadio Software

For the software, we settled to use GNURadio, an open source software package that is well supported by the community and by the Ettus Research Group and the N200 SDR. GNURadio also comes with what is known as GNURadio Companion or GRC. This program provides us with a GUI interface and allows for the drag and drop of blocks that represent certain functions that can be used with the SDR. GNURadio and GRC use Python as it's main scripting language and GNURadio uses C++ code for directly accessing the hardware. The hardware interface for the N200 is provided by Ettus as well. They provide drivers that allow GNURadio to talk to their hardware. Like GNURadio, these drivers are also available to all platforms. In addition, Ettus has released these drivers to the open source community.

GNURadio has been ported to several platforms including Windows, Mac OS X and Linux. Linux is by far the most popular platform to work on and most of this thesis research was done within the Linux environment. Testing was also done though with a MacBook Pro running OS X 10.9. The OS X implementation is fairly well supported and is installed through MacPorts.

Through GNURadio, we can now write code that will take the data given to us from the SDR and manipulate the signal as we need to mimic a radiometer. The power detection, filtering and recording of this data is all done through GNURadio. This also means that we are shifting more of the computational power done on the signal from the FPGA to a computer running GNURadio. This is different from the current ISU radiometer where the FPGA did almost all of the work and then simply sent the data to a computer to be stored. The benefit of this however is that components of the radiometer can be updated by simply changing things in GNURadio and does not require reprogramming the FPGA. It does however mean that the host computer must be powerful enough to handle the signal and specifically the large bandwidth that we wish to send to it.

### 1.1.3 Current ISU Radiometer

The current ISU radiometer was designed and built by the University of Michigan and was designed for soil moisture radiometry at 1.4 GHz. It is a digital direct sample radiometer that



directly samples the incoming RF signal after filtering and amplification. What makes the ISU radiometer unique is that the A/D converters are not fast enough for a 1.4 GHz signal. This is actually done on purpose and is part of the design. With radiometers, we are generally only concerned with power of the incoming signal. Therefore, the current ISU radiometer can under-sample the signal as the only information we need from the signal is the power information. The ISU radiometer is also a correlating radiometer, where both the vertical and horizontal polarization from the antenna can be correlated.

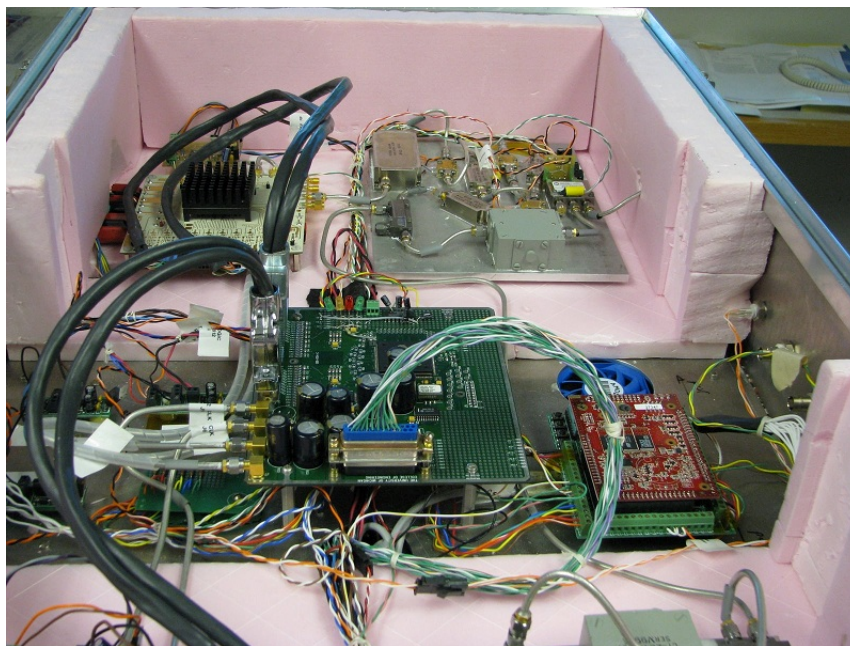


Figure 1.2 Inside the ISU Radiometer showing the FPGA, micro-controller and one of the RF front ends

The current ISU Radiometer uses a 3 stage Low Noise Amplifier (LNA) to amplify the noise while keeping the noise contributed to the system as low as possible. As with any radiometer, the first LNA is the most critical as it contributes the most to the overall system noise temperature. For this reason the University of Michigan used a LNA that did not have a large gain but had a very low noise figure. The second and third LNA has higher gain values at the cost of a higher noise figure. However, since they are further down the chain, they do not contribute as much to the total system noise. The reason for this is further explained in chapter 3.

A driving force behind this thesis research was due to the fact that the digital side of the ISU radiometer was not functioning. Problems were developed with the FPGA board which resulted in the board being sent back to the University of Michigan several times. In addition, the micro-controller that stored the data from the FPGA and also controlled various functions within the radiometer also started to malfunction. In the end, the radiometer was deemed unusable and it was determined that this would be a good time to re-evaluate the current radiometer and see what improvements could be done.

Since the current radiometer was very much like a SDR, it was determined to look into the feasibility of using a commercial off the shelf SDR and using it in a radiometer application. To our knowledge this has not been attempted before and it was determined this would serve as a good thesis platform.

It was assumed in the beginning that the RF front end of the existing radiometer was still functioning properly. Additional tests on the radiometer did show some intermittent problems which did result in some complications in testing. These will be explained in more detail later in this thesis. However, the use of the SDR did help in seeing some of these problems which added an additional benefit to using a SDR to the more traditional radiometers.

#### **1.1.4 Related Works**

As mentioned before, software defined radios have been used in a number of applications. While as far as the author has determined, this is the first application of using an off the shelf software defined radio for a radiometer in remote sensing for soil moisture measurements, there has been similar applications done. The closest application that has been found is with radio astronomy. There are many similarities between radio astronomy and remote sensing of the ground. Both are using a radiometer to listen to a source of interest. In radio astronomy the basic principal is that a "hot" source such as a star will produce more noise than the cooler background of space. In remote sensing we are looking at the overall change of the source to determine it's characteristics. In both cases we are measuring the total power of the noise and based on that information we can determine some properties of the source we are looking at.

The Shirleys Bay Radio Astronomy Consortium (SBRAC) located in Smiths Falls, Ontario

is currently using a USRP software defined radio in conjunction with GNURadio. SBRAC has successfully used this configuration to obtain radio astronomy data by looking at the hydrogen line at 1420.4058 MHz [Leech and Ocame (2007)]. The person in charge of this facility, Marcus Leech, contributed software to the GNURadio specifically for radio astronomy applications. It was this software branch that was used as the base for the GNURadio program that was used in this thesis. Marcus Leech continue to contribute to the GNURadio community and continues to provide support for these functions as well[Leech (2006)].

Another example of a software defined radio used as a radiometer is from students at the University of Illinois and Grand Valley State University that built a software defined radio to listen to emissions from Jupiter[Behnke et al. (2013)]. This software defined radio was built using an Analog Devices AD9460 and a Xilinx Spartan-3E-500 FPGA to build the SDR itself. A RF front end was also built to filter and amplify the signal coming into the SDR. Finally, this group also used GNURadio to interface to and talk to the SDR and used both Python and wxGUI to build a working interface. The students reported that the SDR radiometer worked very well and was able to do so at a fairly low price point.

It should be noted that much of the related works found worked with using a radiometer for astronomy or for looking at the sky. For the ISU radiometer however, we are looking at the ground and we are using the radiometer for soil moisture instead of measuring stars and other points of interest in the sky. While the fundamentals is the same for either radiometer, some adjustments need to be made due to the fact that a radiometer looking at the sky often sees a "cool" brightness temperature whereas a radiometer looking at the ground sees a much "warmer" brightness temperature. This is due to the albedo of the Earth and the fact that it has a much warmer noise temperature then what you find with radio astronomy[Tiuri (Dec)].

## CHAPTER 2. THEORY OF OPERATION

The work of this thesis is to use an off the shelf software defined radio (SDR) to perform the same operation or better of a traditional analog radiometer. Using a SDR radio also means that we are able to be more flexible in how the radiometer performs, is capable of frequency agility and adapting to changing conditions such as interference. Using a software defined radio also allows for implantation of different radiometer types such as a polarimetric radiometer, a correlation radiometer and also a polarimetric radiometer that uses Stokes parameters [Wang et al. (2012)]. Normally, these would require changes to hardware, but all of these types of radiometers can be implemented in software increasing the flexibility of the system.

The hardware that was selected for this research was the Ettus Research N200 Software Defined radio. Information and rationale behind the selection of this unit will be covered later. The N200 however gives us the standard building blocks for a typical software defined radio which includes a A/D converter and on-board FPGA. The N200 however also gives a flexible front end by selecting various daughter boards that fit our application. In addition, the N200 supports up to two daughter boards to be installed.

A software defined radio of course is only as good as the software that is written to work with the hardware. As the name implies, the software defines how the radio will act and function. From a computer engineering perspective though, software can take on several roles in a system. There is software that runs on the hardware, in our case the FPGA, and then there is software that may run on a computer to interface with the hardware. In some cases, the software may only reside on the hardware, however, to increase the user usability of the system, we will be using a combination of firmware that is running on the FPGA and software that runs on a computer. GNURadio is an open source software define radio framework that runs on multiple OSes and offers a rich set of features. In addition, GNURadio is well supported by

the Ettus Research group and is the preferred software for interfacing with their hardware. An easy to use interface was another driving requirement for our implementation of a radiometer in a SDR. GNURadio helps us with this through the use of the GNU Radio Companion or GRC. This was important as it was anticipated that many operators of the radiometer would not know much about programming. GNURadio uses a simple to use graphical system that is very similar to things such as LabView, offering a drag and drop system for adding various radio components such as filters. Like LabView, you can also simply wire up the boxes and complete the circuit path for the RF signal as it gets processed.

## 2.1 Traditional Radiometer Theory of Operation

The primary goal of a radiometer is to measure power. While that statement sounds easy, there are in fact many factors that go in to how well a radiometer can measure the power it sees. A better statement would be that a radiometer's primary goal is to accurately measure the correct power within a certain degree of accuracy. In order to accurately and within a high degree of precision measure power, a radiometer must take into account various factors such as the system noise, the bandwidth of the signal and the stability of the system as a whole[Evans and McLeish (1977)].

### 2.1.1 Measuring RF power

To measure power in a radiometer, several factors are taken into consideration. To begin with we have the noise signal coming from the antenna. Our antenna is assumed to be looking at our target of interest and it is assumed that we can relate the antenna noise to the noise from the source. It is often easier to refer to this noise as the brightness temperature. Therefore the brightness temperature of the source can be related to the brightness temperature at the antenna. We will refer to this brightness temperature as  $T_A$ .

Figure 2.1 shows us an ideal radiometer. That is a radiometer that has an input from the antenna,  $T_A$ , a known bandwidth denoted as  $B$  and a known gain denoted as  $G$ . At the end of the block is the detector, which measures the power from the radiometer.



Figure 2.1 The ideal radiometer block diagram

Only a certain selection of the radio spectrum is observed by the radiometer. This is referred to as the bandwidth of the radiometer and is denoted as  $B$  or as  $\beta$ . This bandwidth is then centered around a center frequency. In our case, we center around 1.405 GHz. There is a reason why 1.405 GHz is selected. The range from 1.4 to 1.426 MHz is protected internationally. This reduces interference from outside sources such as transmitters that can interfere with the operation of the radiometer.

The power coming from the antenna is amplified so it is easier to determine changes in the brightness temperature. The overall gain of the radiometer system is referred to as  $G$  in this case. Finally, we need to apply Boltzmann's constant, referred to as  $k$ . With these values, we can now compute the power the radiometer will see for an ideal radiometer. This can be shown in equation 2.1

$$P = k * \beta * G * (T_A) \quad (2.1)$$

However, since we do not have an ideal radiometer, we have another key component that needs to be addressed. This is the noise that is added to the system by the radiometer itself, primarily from the amplifiers used to increase the signal. Most of the additional noise is from the Low Noise Amplifiers (LNA) that are used to increase the signal while attempting to keep the noise added to a minimum. However, noise is also added from virtually every component in the RF front end. However, by far the largest contribution usually comes from the LNA, which is why the selection of the LNAs is a critical decision. Figure 2.2 shows the additional noise that is injected into the system.

As it can be seen, this additional noise is added to the noise coming from the antenna source. Therefore  $T_N$  is added to  $T_A$  and our final equation for the power measured is shown

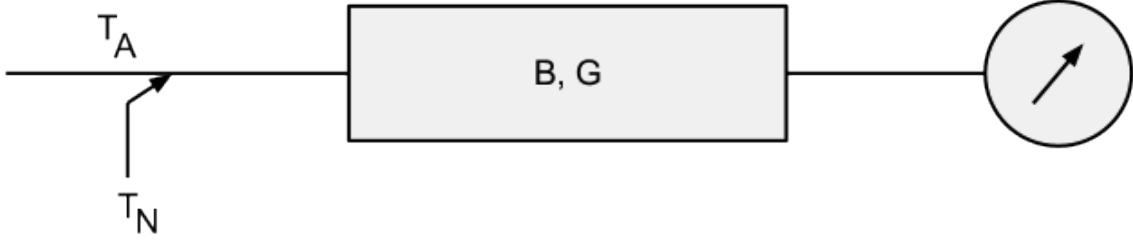


Figure 2.2 A more realistic radiometer model

in equation 2.2.

$$P = k * \beta * G * (T_A + T_N) \quad (2.2)$$

The issue with all radiometers is that it must detect small signal changes in a noisy environment. To understand this, let us look at the example of  $T_A$  has a value of 200 K and  $T_N$  has a value of 800 K. Since  $T_N$  is added to our antenna signal, we have a total noise temperature of 1,000 K. This means that if we want to detect a change as small as 1 K, we must be able to measure the difference between 1,000 K and 1,001 K. [Skou and Vine (2006)]

The ability of a radiometer to detect these small changes is the radiometer's sensitivity, or the standard deviation of the output signal from the radiometer. This sensitivity is also referred to as the Noise Equivalent  $\Delta$  Temperature or  $NE\Delta T$  and is shown in equation 2.3.

$$NE\Delta T = \frac{T_A + T_N}{\sqrt{\beta * \tau}} \quad (2.3)$$

The sensitivity of the radiometer is based on both the bandwidth,  $\beta$ , of the incoming signal and the integration time,  $\tau$ . As it can be seen in the equation, we would want to have as much bandwidth as possible. In a traditional radiometer, this bandwidth is often fixed and is dependent on the band-pass filters used in the radiometer. We can however control  $\tau$  and a longer integration time will help improve the sensitivity of the radiometer.[F. T. Ulaby and Fung (1981)]

This covers a very simplified radiometer, however most radiometers are more complicated than the one shown in Figure 2.2.

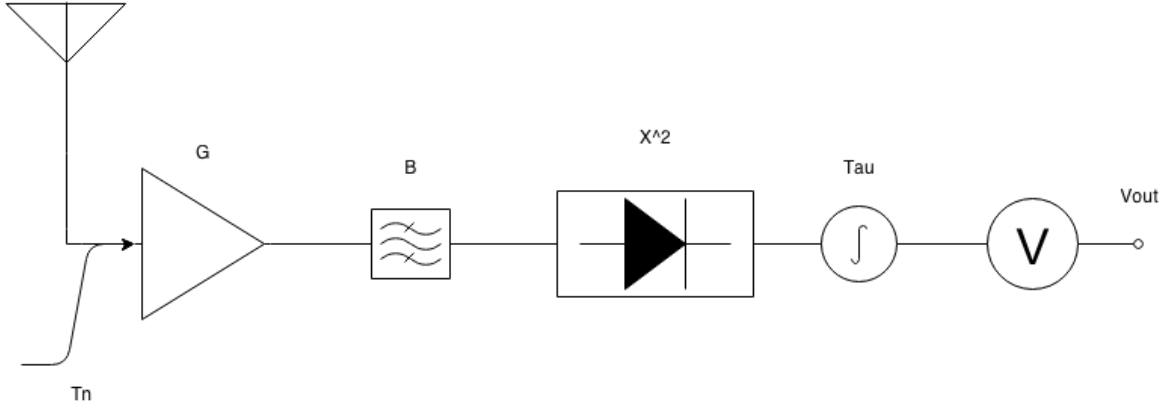


Figure 2.3 A total power radiometer

A more typical radiometer can be shown in Figure 2.3. Here we have expanded the blocks used and have separated the bandwidth and gain blocks. In addition, we have detection, shown as  $X^2$ , and integration. These last two blocks make up the detection and results in the power we can measure, which is a voltage represented as  $V_{out}$ . This results in equation 2.4.

$$V_{OUT} = c * (T_A + T_N) * G \quad (2.4)$$

Here  $V_{OUT}$  is shown by the addition of both the noise from the system  $T_N$  and the noise from the antenna,  $T_A$  and multiplied by the gain in the system,  $G$ .

The voltage output from this radiometer is then either measured or may also be sampled by an analog to digital converter. In both cases the output has no real meaning until it is calibrated.

## 2.2 ISU Radiometer Theory of Operation

The original ISU Radiometer was constructed by the University of Michigan and was based on Dr. Mark Fischman's dissertation on a Direct-Sampling Digital Radiometer[Fischman (2001)]. However, for this paper we will refer to the ISU Radiometer in terms of using the



RF Front end of the radiometer. This RF front end contains the band-pass filters and the Low Noise Amplifiers (LNAs). The LNAs play an important role as explained in the previous section to amplify the noise we are looking at while minimizing the amount of noise they contribute to the overall system. While the band-pass filter is not needed, it did ensure that the signal we were looking at was in the 1.4 GHz band.

### 2.2.1 Existing ISU Radiometer RF Front End

The existing ISU radiometer RF Front end uses a series of cascading low noise amplifiers (LNAs) that increase the power from the antenna while contributing a minimum amount of noise to the system [Erbas et al. (ug 4)]. In addition, the current ISU Radiometer uses bandpass filters to narrow the bandwidth to the desired 1400 to 1425 MHz that we wish to monitor. While these are not needed with the addition of the software defined radio, since we can filter in software, they do not contribute much in terms of the noise temperature, and as passive components do not impact the performance of the radiometer.

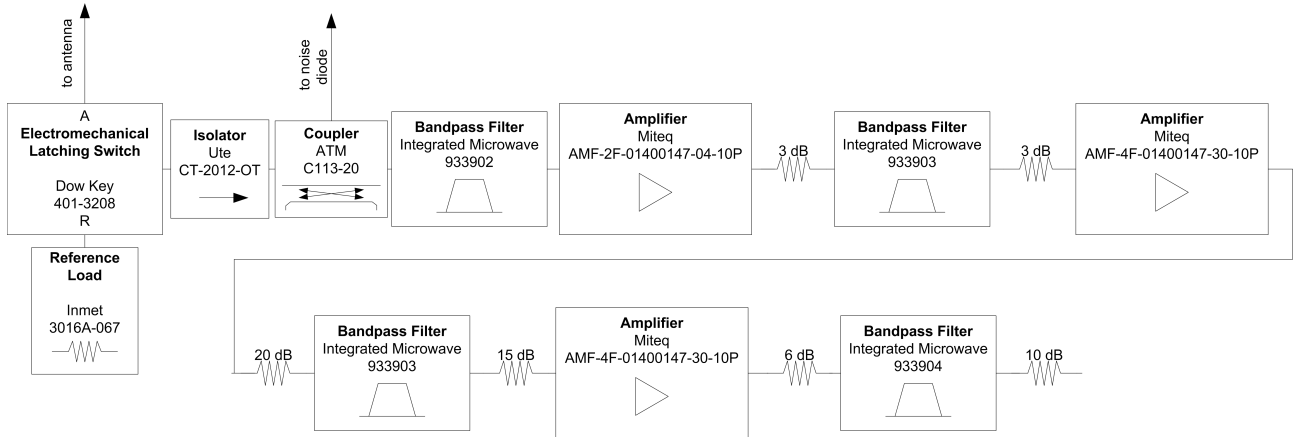


Figure 2.4 A block diagram provided by the University of Michigan that shows the components used in the ISU radiometer's RF front end.

As it can be seen in Figure 2.4 the current ISU radiometer uses a series of amplifiers, filters and attenuators to amplify and filter the incoming signals. The attenuators are used to ensure that we do not overload the front end of the LNA proceeding it in the chain. This RF chain

provides us a spectrum from 1400 MHz to 1425 MHz and gives us a total gain of approximately 81 dBm. This raises the noise floor to approximately -30 dBm which makes it very easy to detect with both a square-law detector and the software defined radio. The performance of the ISU front end was confirmed by using a spectrum analyzer to look at the output signal and power output. The spectrum analyzer output can be seen in Figure

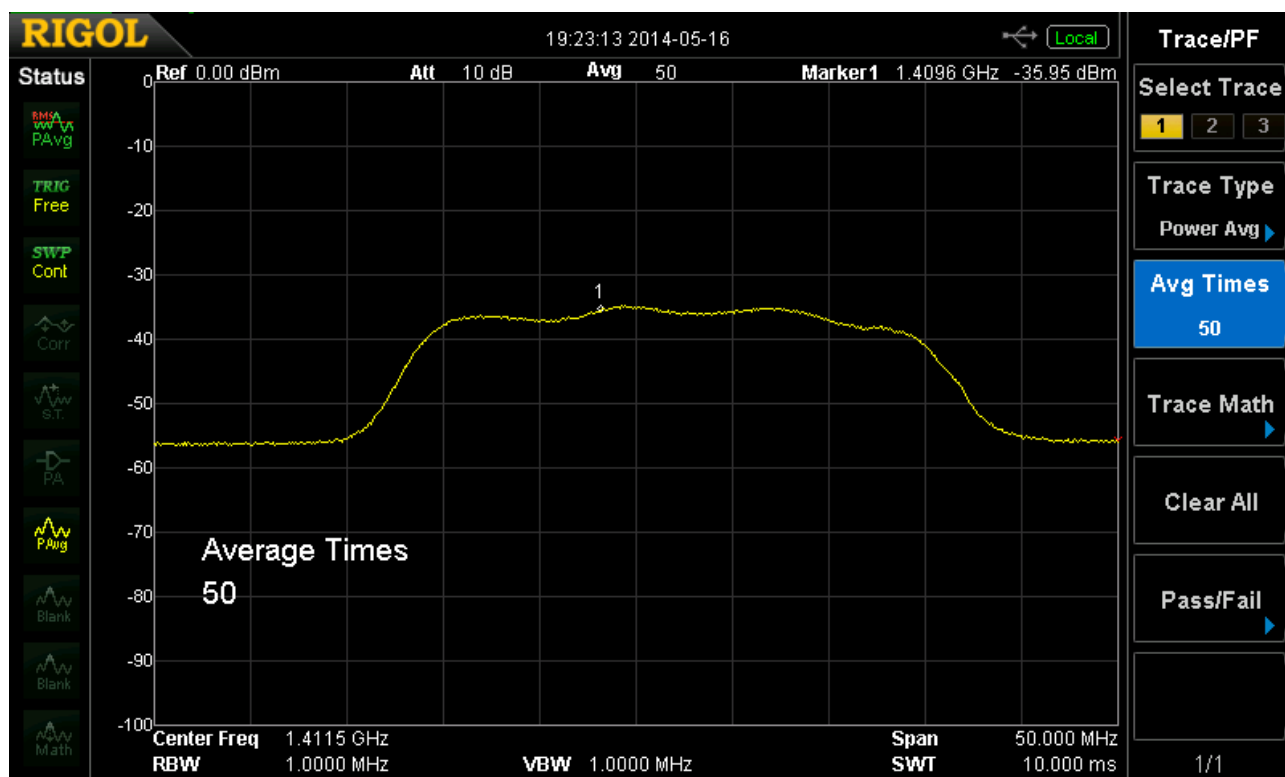


Figure 2.5 A screenshot taken from a spectrum analyzer showing the filters and amplification done by the ISU Radio RF front end.

### 2.2.1.1 A note about the ISU RF Front end

During the work on this thesis a few issues came up with the ISU radiometer and the RF Front end that was used. When work began on this thesis, it was assumed that the problems that were found with the radiometer was limited to the digital portion of the radiometer. This meant that the RF front end was performing as expected. At first, early tests on the ISU radiometer RF front end seemed to confirm this as the output seen on a spectrum analyzer

appeared to be normal. However, further testing started to show unusual behavior. Later, it was discovered that the ISU radiometer's RF front end was prone to malfunctioning under certain conditions. These conditions seemed to occur when the radiometer was moving on it's platform and even the lid to the box containing the RF front end would affect it.

A test was done to show this effect with the lid, and further information about the rotation affect is discussed in Appendix 2 in regards to the E E 518 laboratory experiment. For the lid experiment, a spectrum analyzer was hooked up to the ISU radiometer's RF front end. With the lid off, you can see what appears to be a normal signal that we would expect from the radiometer in Figure 2.5. However, in Figure we placed the lid on the radiometer and the results are quite different. Changes to the signal were observed in real time as the lid was placed on the radiometer and it was clear that this was also causing the radiometer to produce undesirable results.

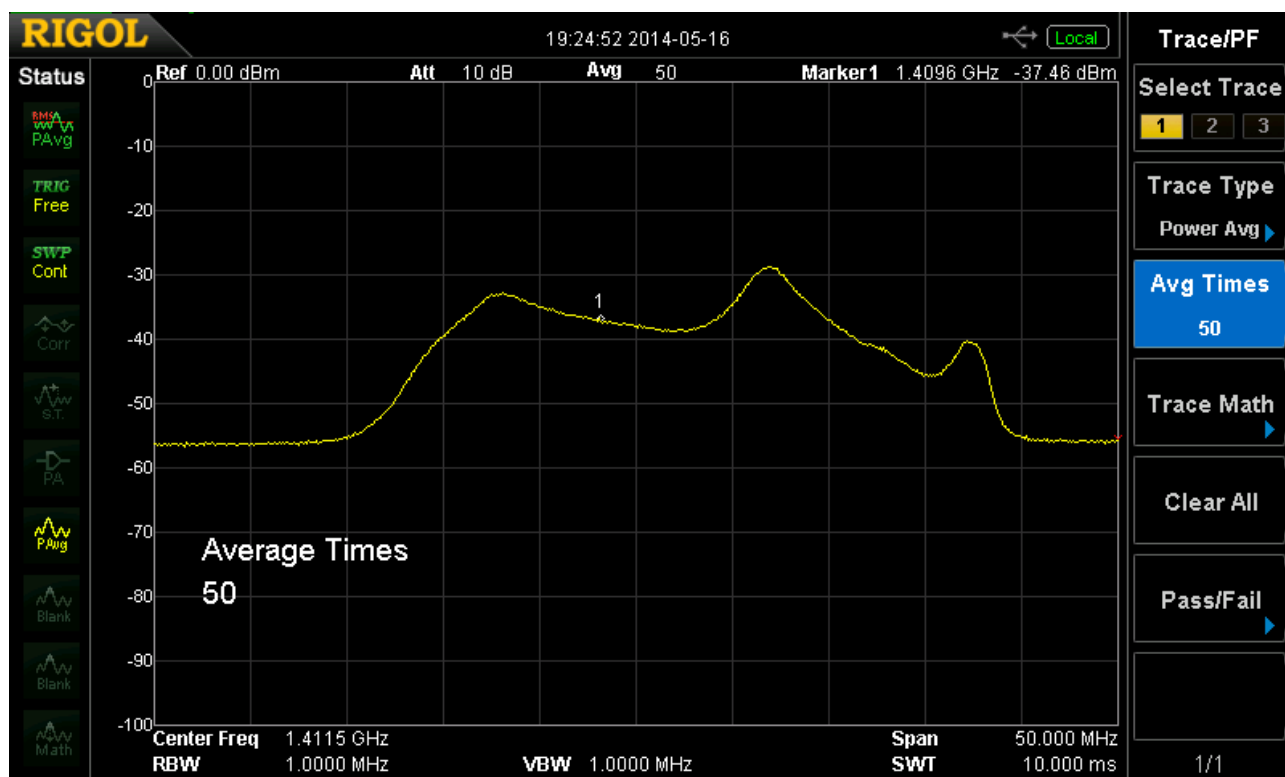


Figure 2.6 A screenshot taken from a spectrum analyzer showing the affect of the radiometers lid as it was placed on the radiometer.

It was clear that there is something happening with the ISU radiometer's RF section. This also points out another use for the addition of the software defined radio. The old ISU radiometer system under-sampled the signal and so frequency information was lost. Without hooking up something like a spectrum analyzer there would be no way for any to know what was happening with the ISU radiometer. However, with the SDR we now have power and spectrum information. In fact, it was during the E E 518 laboratory that we noticed a problem with the ISU radiometer and we discovered this by looking at the data that was captured by the SDR.

In order to keep the thesis research moving and since this thesis focused on the software defined radio side of the radiometer, all experiments were conducted with the radio stationary and with the lid removed. Before any experiments the spectrum output was verified before continuing with any experiments.

### 2.3 Software Defined Radio Theory of Operation

A software defined radio (SDR) attempts to mimic radio functions in software instead of relying on dedicated hardware. As stated in the previous section, a radiometer is a radio that can detect changes in power. Therefore the SDR needs to be able to measure power coming from the source that we are looking at.

The SDR is able to do all of this but in a slightly different way than a traditional radiometer. A traditional radiometer will use a device called a square-law detector to measure the incoming RF signal. This device is simply a diode where the input voltage is squared and the output from the diode is proportional to the AC input voltage. Therefore a 3 dB increase in the RF power will result in a two times increase in the voltage. This power measurement will be fluctuating rapidly, therefore we will then run the output from the square-law detector to an integrator and integrate over a set time period. As shown in equation 2.3, this integration time also affects the NE $\Delta$ T or sensitivity of the radiometer as well.

For the SDR, the incoming signal is sampled and converted to I/Q values. The I/Q values represent the amplitude and phase information of the signal. In GNURadio we are then able to square these values within software. This block in GNURadio mathematically performs what

is shown in equation 2.5.

$$I^2 + Q^2 = P_{out} \quad (2.5)$$

Like the analog square-law detector, this signal will fluctuate rapidly and to improve the sensitivity of the radiometer we wish to integrate this signal. A RC filter is analogous to an integrator where the R and C values determine our time constant and our integration time for the filter. A SDR however operates in the digital domain at discrete intervals. One type of filter that can be used in the Infinite Impulse Response (IIR) filter.

To begin with, we look at what an analog RC filter looks like.

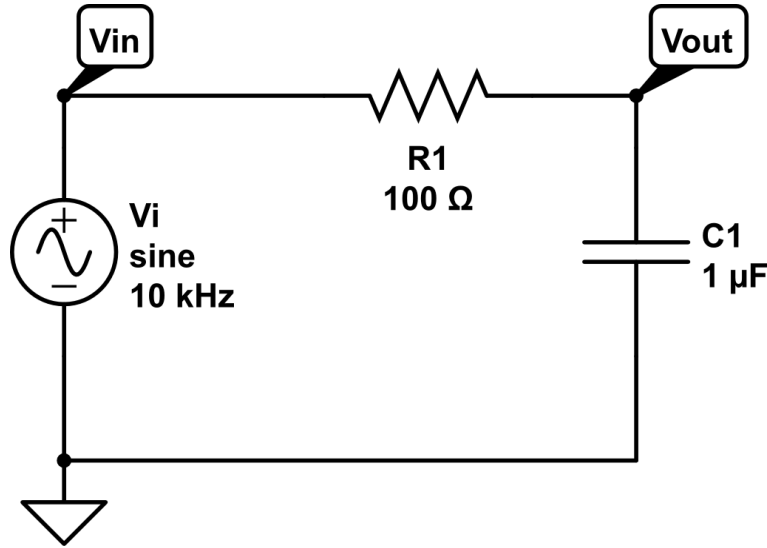


Figure 2.7 A simple RC circuit

This circuit can be represented by equation 2.6.

$$\frac{V_{in} - V_{out}}{R} = C \frac{dV_{out}}{dt} \quad (2.6)$$

A Finite Impulse Response (FIR) filter is a digital filter that can take an impulse signal and decays to zero after a finite number of iterations. This type of digital filter can be represented by equation 2.7 which mathematically expresses the FIR Filter.

$$y_n = \sum_{i=0}^{P-1} c_i x_{n-i} \quad (2.7)$$

This simply says that the  $n$ th output is a weighted average of the most recent  $P$  inputs.

An Infinite Impulse Response (IIR) filter is the same as the FIR filter, except that we add an additional summation term which feeds back the previous output.

$$y_n = \sum_{i=0}^{P-1} c_i x_{n-i} + \sum_{j=1}^Q d_j y_{n-j} \quad (2.8)$$

Equation 2.8 shows that a FIR filter is really a IIR filter, except that  $Q = 0$ .

To get a better understanding on how our digital IIR filter relates to our RC filter analog, we can look at the Fourier Transform and the relationship of the input to the output in the frequency domain.

$$H(f) = \frac{\sum_{j=0}^{P-1} c_j e^{-2\pi i j f T}}{1 - \sum_{k=1}^Q d_k e^{-2\pi i k f T}} \quad (2.9)$$

In equation 2.9,  $f$  is our frequency in Hz and  $T$  is the time between samples in seconds and is related to our sampling frequency.

We now want show the link between our analog RC circuit and the IIR filter. Looking at equation 2.6, which represents the differential equation relating the input voltage  $V_{in}$  to the output voltage  $V_{out}$ , we can substitute for input and output of our IIR filter. Since we are now in the time domain, we need to define what  $T$  is and we can do that using equation 2.10.

$$T = \text{timebetween samples} = \frac{1}{\text{samplingrate}} \quad (2.10)$$

We can now relate our input voltage to the input to our IIR filter and the output voltage to the output of our IIR filter.

$$x_n = v_{in}(nT) \quad (2.11)$$

$$y_n = v_{out}(nT) \quad (2.12)$$

We can now rewrite our difference equation with  $x_n$  and  $y_n$ .

$$\frac{x_n - y_n}{R} = C \frac{y_n - y_{n-1}}{T} \quad (2.13)$$

Now, we can solve for  $y_n$  which results in our final equation for showing how a IIR filter is related to an RC filter.

$$y_n = \frac{T}{T + RC} x_n + \frac{RC}{T + RC} y_{n-1} \quad (2.14)$$

It can be seen that an IIR filter can have the same frequency response as we would expect from an analog RC filter. As our sampling rate approaches infinity, the approximation gets closer to the original response from the analog RC circuit.

For the cutoff frequency of a RC circuit, we know that it has the relationship shown in equation [2.15](#).

$$f_c = \frac{\sqrt{3}}{2\pi RC} \rightarrow RC = \frac{\sqrt{3}}{2\pi f_c} \quad (2.15)$$

The  $RC$  term gives us our time constant of the circuit and can be used to calculate out our coefficients. We are not concerned about the actual values of R and C with our IIR filter, instead we just need the product of R and C.

For GNURadio most of the work is done for us. We can simply enter in our desired cutoff frequency and GNURadio will calculate our IIR filter coefficients. However, this shows that an IIR filter works very much like an analog RC low pass filter.

Like a traditional radiometer, the SDR will use an antenna to look at the target of interest. SDRs still use a RF stage that takes the power from the source and amplifies it. The difference though begins after that. A SDR will then sample and generate I and Q values that represents the amplitude and phase of the signal. From there, this data is sent to a computer to be processed. We can then use this information to calculate the power that is being seen. In addition, we can manipulate the signal in other ways such as applying a filter to filter out an unwanted source.

Now that we have the un-calibrated power and we have applied a low-pass filter to smooth out the information, we have replicated the key components that you would find in a traditional

radiometer. All of this has now taken place in the digital domain. The information can now be stored, displayed or both for further analysis.

### 2.3.1 General Specifications

The N200 is a SDR developed and built by Ettus Research. It is one of the newer models in the companies USRP line of SDRs. It offers several key features that were desirable for a radiometer type of application while still being an economical option. It also offered a highly flexible architecture which will allow this radio to be up-gradable in the foreseeable future.



Figure 2.8 The USRP N200 from Ettus Research

The N200 has the following features that made it well suited for our specific application.

- Dual 14-bit ADC
- Dual 16-bit DAC
- 50 MS/s Gigabit Ethernet streaming



- Modular daughter-board system for RF front end

These specifications had a large impact on the selection of the N200 for this application. Specifically the 14-bit ADC, the 50 MS/s and the modular daughter-board system were the largest factors in the decision to use the N200 SDR. Further explanation on these specifications are explained in the following sections.

#### **2.3.1.1 14-bit ADC**

The analog to digital converters (ADC) allow us to take the analog I and Q values from the daughter boards and digitize this information. Once digitized, we can now work with the signal both on the on-board FPGA board or stream it to the computer so that our software can manipulate the signal. In radiometry, we are primarily looking at the overall power of the signal and this does not require us to accurately recreate the signal. However, it will be discussed in this paper in further detail that there are times where being able to recreate the signal for additional analysis can be quite beneficial. For that reason, the resolution of the ADC becomes more important.

#### **2.3.1.2 50 MS/s Bandwidth**

For this application, the N200 is required to receive a signal at 1.4 GHz and is at least 20 MHz wide. Bandwidth plays an important role in remote sensing and to the amount of power that we receive. It also plays a key role in the sensitivity of the radiometer. This was discussed in the theory of a traditional radiometer and equation 2.2 shows us the relationship that our bandwidth plays in the overall power received.

Equally important however is the the sensitivity or how small of a change the radiometer can detect. This sensitivity or NEAT function is shown in equation 2.3. Again, the amount of bandwidth the radiometer receives plays a large part in the performance of the radiometer.

Another factor however is the amount of bandwidth the existing RF front end of the ISU radiometer is able to provide to us. The current filters on the ISU Radiometer keep the bandwidth of the signal to 20 MHz. This meant that at the very minimum a 20 MS/s bandwidth from the SDR is required.

The N200 is capable of working with up to 100 MS/s signal and can stream up to 50 MS/s through the Gigabit Ethernet connection. The N200 also has the ability to have up to 2 daughter boards installed. If we assume each will have up to a 20 MHz signal, this means up to 40 MS/s of data will be required. This means that the N200 meets the minimum requirements for working with needed bandwidth of the radiometer. In addition, the FPGA on the N200 is capable of working with up to 100 MS/s, so there is room handling additional bandwidth by using the on board FPGA to process the signal.

## **2.4 A Software Defined Radio Radiometer Theory of Operation**

A software defined radio radiometer implements the key features of a radiometer in software instead of relying on hardware. While some hardware is still needed, primarily with the RF front end that amplifies the signal while maintaining a low noise factor, we want the software to do as much of the work as possible.

### **2.4.1 Hardware**

Hardware with a software defined radio still plays a critical role. A traditional software defined radio will focus on digitizing the signal as soon as possible and the hardware used will be focused on performing that critical digitizing process. For a software defined radio radiometer, we still want to digitize as soon as possible, but we also need to consider our noise factor. Most software defined radios are designed for communication purposes such as implementing 802.11b or other wireless protocols. In these cases a higher noise factor is not as detrimental to the overall system as it would be with a radiometer. This is mainly due to the fact that we have a known signal that is magnitudes greater than the noise floor. In a radiometer however, we do not have this large separation between the information we need and the noise of the system. And so our noise factor is a more critical component.

To counter this, we use Low Noise Amplifiers to amplify the signal but it can also help lower our noise factor. The first LNA in the chain contributes significantly to our noise factor, so by selecting a LNA that has a very low noise factor, it reduces the noise factor for the system. This can be shown by looking at the equation that calculates our noise factor.

$$F = F_1 + \frac{F_2 - 1}{G_1} + \frac{F_3 - 1}{G_1 G_2} + \frac{F_4 - 1}{G_1 G_2 G_3} + \cdots + \frac{F_n - 1}{G_1 G_2 G_3 \cdots G_{n-1}} \quad (2.16)$$

This however is the only major change we need to do for doing radiometer work with an off the shelf radiometer. The rest will be done within software which is the principal reason for using a software defined radio.

The rest of the hardware that is needed is the hardware to allow us to digitize the signal as soon as possible. The Ettus Research N200 SDR uses daughter boards which allow for easy replacement of the RF front end to the software defined radio. Ettus Research makes a number of daughter boards that range from a a wide range of frequencies and is available with transmitters, receivers and transceivers. Because these boards are modular and do not touch the analog to digital converters or the on-board FPGA, very little change is required in the software. The daughter boards however do have the required RF hardware for the signal to be processed. In this application it was required that the signal was detected at 1.4 GHz with a bandwidth of 20 MHz. The DBSRX2 receiver met this requirement and was selected to be used with the N200. In this radiometer application transmission is not needed and is in fact illegal in the 1.4 GHz band, which is reserved for radiometer applications.

#### **2.4.1.1 The DBSRX2 Receiver**

The DBSRX2 receiver board is capable of receiving signals between 800 MHz and 2.3 GHz. The board is able to plug into one of expansion slots available on the N200 that we are using. This board then down-converts the signal into analog I and Q values that are then fed into the N200 analog to digital converter.

The DBSRX2 has several key components on it that is used to take the analog RF signal and prepare it for digitization by the analog to digital converter. First the signal is amplified through a Programmable Gain Amplifier (PGA). This PGA is accessible from the software and can be configured by the software. Next the signal goes into a direct-conversion integrated circuit that directly converts the RF signal to analog I and Q values. The integrated circuit, a Maxim MAX2112 device, also includes a Low Noise Amplifier (LNA), mixer and Low Pass

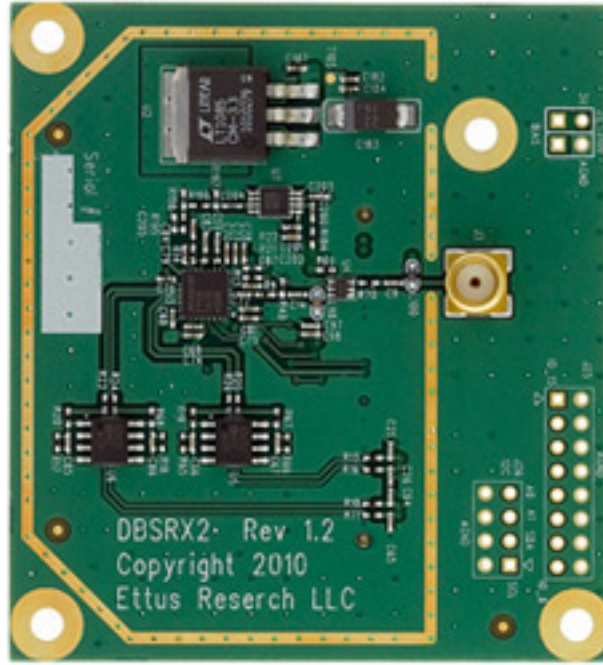


Figure 2.9 The DBSRX2 daughter board from Ettus Research

Filter (LPF). This essentially amplifies the signal, mixes into baseband and then applies a low pass filter.

These analog I and Q values are then passed to the N200 to be sampled by the analog to digital converter. The IQ values are differential signals to minimize noise possible interference.

#### 2.4.2 Software

Software of course plays a critical role in both a software defined radio but also in our software defined radio radiometer. There are really two pieces of software that are in play with the software defined radio we are using. The first is the firmware that used in the FPGA of the N200. However, this firmware currently does not implement the actual radiometer functions but instead provides us a link to both the I/Q data and also the control of the of the SDR itself.

The second is the software that is running on the host computer. It is this software that provides the calculations on the I/Q data to give us the information we need and also creates a

GUI for the user to interface with the radio. For this software, we will be using GNURadio, an open source software program that is used in many software defined radios including the N200 SDR that we have.

#### **2.4.2.1 GNURadio**

GNURadio fills in the software side of the software defined radio. Although there is firmware that runs on the FPGA in the N200, this firmware is designed to communicate with a host PC. It is this software that does most of the work in terms of the calculations that are done with the signal. The FPGA simply sends the raw IQ data to the host PC, which then performs the necessary math functions. Again, the reason why software defined radios are desirable is the ability to change the behavior of the radio very quickly. In our case we can change functionality by simply loading a new software program in the host PC.

This functionality is ideal for communication type of radios where different modulation schemes and encoding and decoding methods can easily be changed out. However, in a radiometer we are not interested in this aspect of the SDR. However, one functionality is available that can be very valuable for a radiometer, and that is with filtering. Although we often use frequencies that should be free from interference, this is not always the case. Interference can and often does still occur, even in these protected frequencies. With the SDR, we are able to quickly adapt to changing conditions by moving the frequency, changing our bandwidth and even filter out an offending signal.

GNURadio was selected as it is an open source software platform. GNURadio is licensed under the GPL license and has a strong community that continually updates the software. It is also well supported by third parties such as Ettus Research Group, National Instruments and other SDR developers. In addition GNURadio has a strong set of tools that can be used to develop programs that run under GNURadio. Tools such as the GNURadio Companion (GRC) allows for an easy to use GUI to develop code for GNURadio. GNURadio is also written in Python, which allows for easy modification and access to additional tools that can be used with GNURadio.

GNURadio Companion works by having many of the common functions as blocks that can

picked and placed on the screen. Once placed, the blocks can be wired up, very much like LabView, and the flow of data can be controlled in this fashion. While GNURadio Companion provides most of the essential blocks used in most applications, additional blocks can be added if needed. This is due to the fact that GNURadio is built using Python and the blocks in GNURadio Companion are simply blocks of Python code. To "compile" a GNURadio Companion sheet, you simply run the sheet, which then generates the Python code that is then executed. GNURadio actually uses a combination of Python and C++, where Python handles most of the interface and the C++ is usually most of the drivers and low level interface to the hardware. This allows for a easy to use system but still meets some of the demanding

performances needed for handling large amounts of data.

GNURadio Companion also includes blocks that allow it to create a GUI type of interface. The typical method it uses for this is using wxGUI although GNURadio Companion does also include blocks that can use QT for generating widgets as well. However, the wxGUI tends to work better and has better support in GNURadio than QT.

Through these blocks can not only manipulate the data we need to perform a total power radiometer in software but to also create a user interface that allows us to control the radiometer as well. We are also able to display the information in real time so the user can see changes in power and even monitor spectral information during the operation of the radiometer.

## **2.5 Comparison of a Software Defined Radio Radiometer vs Traditional Radiometer**

As outlined above, a software defined radio implements a traditional radiometer but in the digital domain. For power detection, we simply sum the squares of the I and Q values that have been sampled by the software defined radios analog to digital converters. As with a traditional radiometer, we also want to filter this information to remove much of the jitters that comes from the rapid fluctuations in the power readings. This is done using an IIR low pass filter, which mimics a traditional RC low pass filter. Once completed, we now have the total power reading from the radiometer and we can now store, display or both this information.

A traditional radiometer may also use an analog to digital converter in order to digitize the analog voltage from the square-law detector. Because the sample rate of this voltage is very low, almost any analog to digital can be used for this. At this point however, there is no frequency information, only the magnitude information is being retained and recorded.

## **2.6 Comparison of a Software Defined Radio Radiometer and ISU Radiometer**

The original ISU Radiometer used similar components as a software defined radio but in a different way. Like a software defined radio, the original ISU radiometer used an analog to

digital converter to sample the incoming RF signal. It then sent this information to a FPGA to be processed and then sent to a micro-controller to store this information.

The difference however lays with how power information is extracted from the signal. The original ISU radiometer purposefully under-sampled the signal but is still able to extract power information, however at the cost of losing frequency information.

The radiometer in this thesis however retains both phase and magnitude information and instead mimics a traditional radiometer in software by summing and squaring the I and Q values and then running this information through a low-pass IIR filter. By retaining this information, we can perform a more in-dept analysis of the signal coming into the radiometer which allows for greater agility in the system.



## CHAPTER 3. Implementation of a Software Defined Radio Radiometer

One of the principal goals with this research was to implement a fully functioning total power radiometer within software. The N200 provides us the link between the RF signal captured by the antenna and converts that to a format that the computer can now use to manipulate the signal. Once the signal has been passed to the computer, GNURadio will implement the correct algorithms to detect the power within the signal, filter and output the information. One of the advantages of course with a SDR is that filtering can also be done within the software. In addition, thanks to the WxGUI that GNURadio uses, we can also build a user interface that can control several key variables that are useful for us. This includes controlling the gain on the programmable gain amplifier on the DBSRX2 card, the sampling or bandwidth of the signal, the center frequency, and also the integration time. All of these can now be controlled in real time as well. GNURadio will also store the power data so that we are able to do further analysis of the data using a software program like MatLab. Because GNURadio is a very flexible system, much more can be done with the signal if needed and future updates may add more capabilities or additional analysis on the signal can be achieved.

### 3.1 Requirements

Requirements for this system was based largely on what the current ISU radiometer was capable of doing and was also based on requirements of a typical radiometer. These requirements are outlined in table 3.1 below.

#### 3.1.1 Hardware Requirements

The selection of the N200 SDR from Ettus Research was based on many of the requirements outlined in table 3.1. In addition, we wanted the hardware to be flexible but also affordable.

Table 3.1 ISU Radiometer requirements

<b>Requirement</b>	<b>Value</b>	<b>Units</b>
Frequency Range	1400 - 1425	MHz
Bandwidth	25	MHz
Polarization	Dual	
Sensitivity	-30	dBm
Accuracy	1	Kelvin

There are many different kinds of software defined radios on the market. However, we choose the N200 based on the availability of the device, the large community support, especially with regards to support by GNURadio, and because it meet and often exceeded the requirements stated above.

Flexibility was another key aspect of the N200 that made it an excellent selection for this research. The N200 uses a daughter board setup for bridging the RF interface to the rest of the electronics. Several different daughter boards are available that have different frequency ranges and offer both receive, transmit and transceiver designs. For the radiometer we need to operate around 1.4 GHz and receive only. Based on those requirements we choose the DBSRX2 daughter board. This board is designed from 800 MHz to 2.3 GHz and has a fairly low noise figure.

The current RF front end to the radiometer is designed for a 20 MHz wide signal. This requirement was one of the main driving points for selecting the N200 SDR as it can support up to 50 MHz in bandwidth between the N200 and the host computer. This is accomplished by using a 1 Gbps Ethernet connection between the N200 and the host computer.

### 3.1.2 Software Requirements

The driving force for the software requirement was to have a system that was easy to use. The ISU radiometer originally used LabWindows, to retrieve data and control the radiometer. A revision was made that changed the interface control to LabView. In both cases the interface was a graphical interface that allowed the user to easily set parameters and download the data.

The original ISU Radiometer did most of it's processing on board the FPGA which ran custom firmware provided by the University of Michigan. The graphical interface simply down-

loaded the data and allowed for control of certain parameters. However, since the RF front end used traditional components, there was very little that could be changed in the RF chain. With the switch to a software defined radio platform, we switched to having most of the processing done by the host computer with digitization and low level processing accomplished by the software defined radio's FPGA. However, we still wanted to keep the interface hardware fairly simple. GNURadio was selected as it includes GNURadio Companion (GRC) which uses a graphical interface for creating the radio environment. It also includes options to create a user interface during the operation of the N200 as well. This allowed us to rapidly create both the critical radio components needed for the radiometer and also a control interface.

### 3.2 Power detection

Power detection is a key ability that allows a radiometer to function. At its core a radiometer is a power detector. Therefore the implementation of power detection is a crucial function of a software defined radio radiometer.

To implement a total power radiometer in software, we first need to look at how we implement a total power radiometer traditionally. Traditionally, a square law detector is used to detect the average power that is seen by the radiometer. This simple device uses a diode that gives a small voltage output based on the RF power present. This small voltage is then amplified and can now be calibrated with a known source to give us a noise temperature.

To implement this in software, we need to build a square law detector mathematically. We can then give this to the software defined radio to process the information accordingly. A square law detector mathematically, is the sum of the squares. Once the signal has been digitized, it is expressed in data bits of I and Q, which represent in-phase and quadrature-phase of the signal. By squaring each term, we get the desired result of the power of the signal [Sarijari et al. (Dec)][Rashid et al. (2011)].

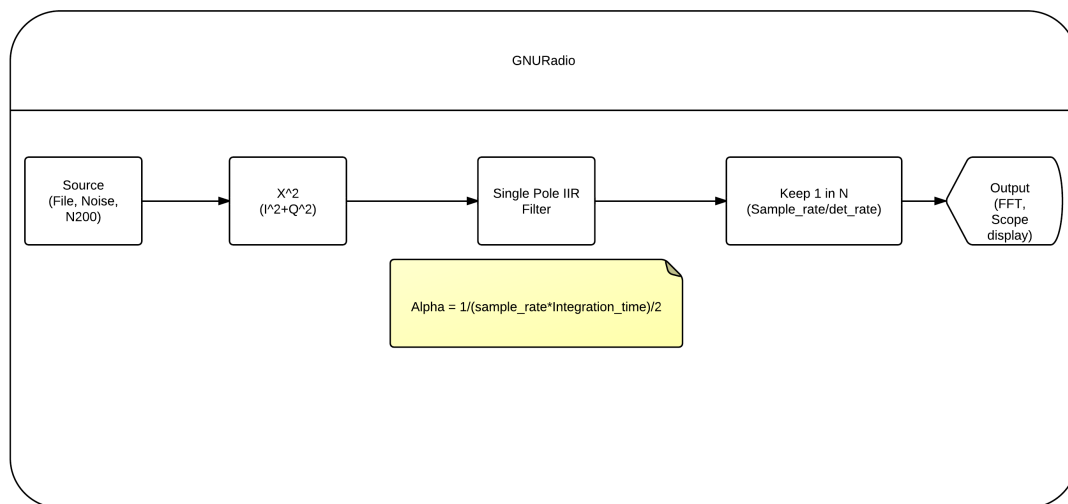


Figure 3.1 A block diagram showing how the radiometer performs the equivalent square law detector in software.

### 3.3 Integrator through a IIR Filter

Another step that we typically do in a traditional radiometer is to integrate the signal over time. This gives us an average of the signal and helps to smooth out the output. In addition, we will show later that the integration time can be adjusted to help improve our sensitivity of the radiometer.

In a traditional radiometer can integrate by using a simple integrator circuit, which consists of an op-amp, resistor and capacitor. This type of circuit is also equivalent to a low pass filter circuit as well, and the two are interchangeable. We can then look at how we filter in the digital

domain, and this is done with an infinite impulse response filter or IIR. We can use this type of digital filter to then integrate the signal for our total power radiometer.

### 3.4 GNURadio Blocks

A software defined radio by its definition requires software for the proper operation of the radio. In our case there is the software or firmware that resides on the FPGA and then the software that runs on the computer. For this thesis, we focused on the software running on GNURadio. This software package provides us with the ability to write the code needed to implement a total power radiometer but also gives us a method to control the SDR as well. It also allows for us to record the information for performing post-processing on the data.

### 3.5 Control of the SDR Hardware through GNURadio

The N200 sends all data across the 1 Gbps connection to be read in by a host computer running GNURadio. This data is the raw I/Q values that is read by the on board A/D and processed by the on board FPGA. An example of a very simple GNURadio software implementation would simply take this data and store the data to a hard drive in a file. This can be very handy if we want to simply record the data and then process it later. However, depending on the sample rate, it can consume a large amount of storage. A short recording can easily consume 1-2 GB with a sample rate of 10 Msps. It also does not give us any immediate feedback on the radiometer and it does not give us controls of the radiometer such as frequency, integration time or other key variables. Fortunately GNURadio has tools that allow us to build up a very rich application that is able to give us the data we need and control the software defined radio as well.

The GNURadio Companion allows us to create python code that is used to not only receive the data from the SDR but also perform calculations, signal processing and also to send control information to the SDR. This allows us to build up an application that can be run on any computer that is capable of running GNURadio.

Through this interface we are able to control several key aspects of not only the radio

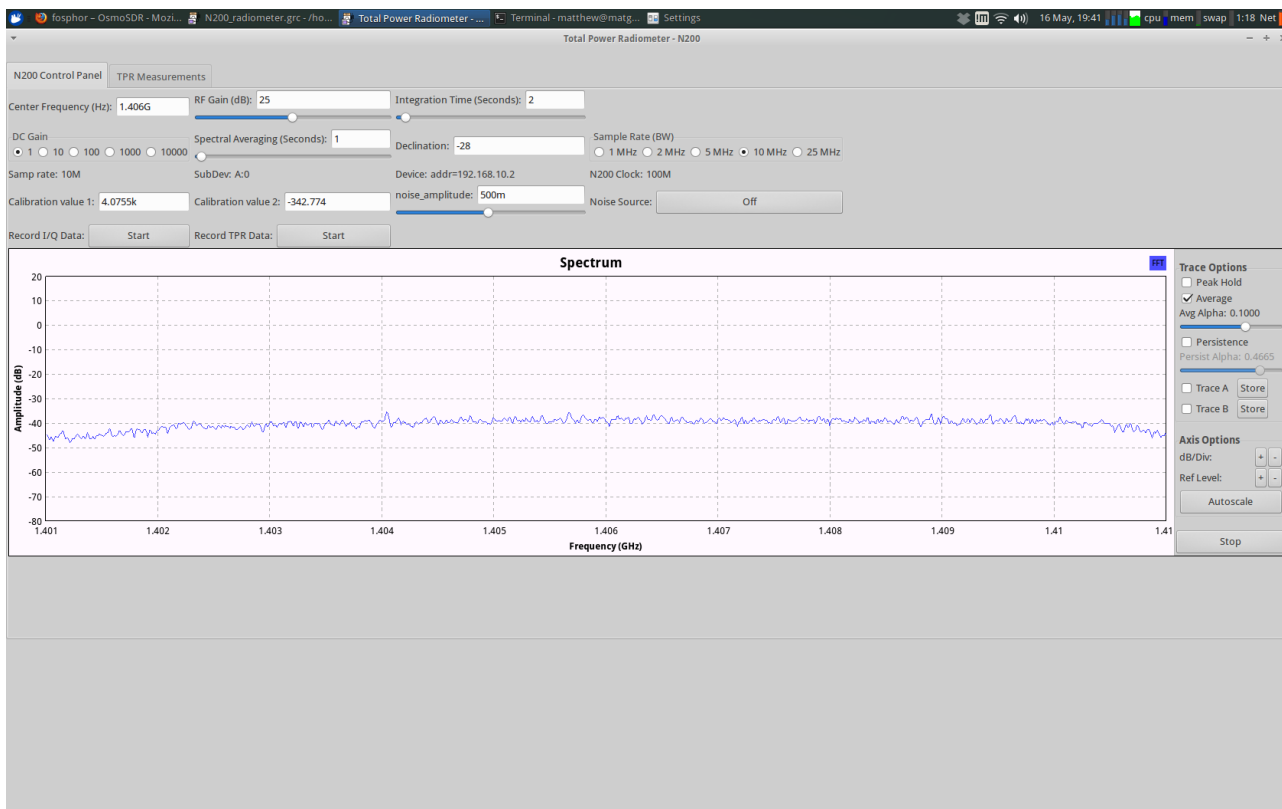


Figure 3.2 A screenshot of the interface made for communication with and controlling the software defined radio

hardware within the SDR but also with the behavior of the radiometer as well. Hardware control of the SDR hardware allows us to change frequency and also adjust gain values within the N200. Bandwidth is another parameter that can be altered from here as well. Bandwidth affects the bandwidth for the RF signal, but also has an impact on the radiometer sensitivity as well. Additional controls allows for alterations to the radiometer and includes being able to adjust the integration time of the radiometer.

### 3.6 GNURadio Data Handling

Once we have the data that has been processed by the software defined radio, we will want to display this information and be able to store the data so we can analyze it later if needed. Data display can be handled GNURadio, where we can plot the total power over time. This

allows the user to be able to visualize the total power and be able to determine if the total power has increased or decreased over the time window shown.

Although not usually needed for a total power radiometer, we also have the ability to look at the signal in terms of a frequency versus amplitude. This allows to look for any unusual signals that may be interfering with or causing erroneous data with our radiometer.

Finally we will want to store the data so we can do additional analyses on it at a later time. The GNURadio program allows us to store the data in two formats. The first format is storing the raw I/Q data from the radiometer. This format allows us to "playback" the data through GNURadio at a later time. This can be useful for if we wish to change parameters in GNURadio such as bandwidth or integration time. It can also be a good diagnostic tool as we can check that the signal coming in is clean or if we need to apply additional filters to remove an unwanted signal. It should be noted that this file can be quite large, consuming several gigabytes of data for a 20 MHz wide signal in a matter of minutes of record time.

The second format is the total power that has been calculated by the radiometer. This file is much smaller in size since much of the signal information has now been reduced to simple power versus time information. This allows for easy manipulation through any type of math program such as Matlab for analysis.

### **3.6.1 GNURadio Data Display**

The information from the software defined radio can be displayed through GNURadio to show a number of things. Since we have both frequency and magnitude information we can display this information. We are able to also display the information that shows the total power that is being seen by the radiometer as well.

We are not limited to just total power from the radiometer. If the radiometer has been calibrated, those calibration points can be entered and GNURadio can calculate the calibrated noise temperature. Additional information may also be added as needed. For example, we are able to view the full spectrum that the radiometer sees. This can be a useful tool for looking at potential RFI issues.

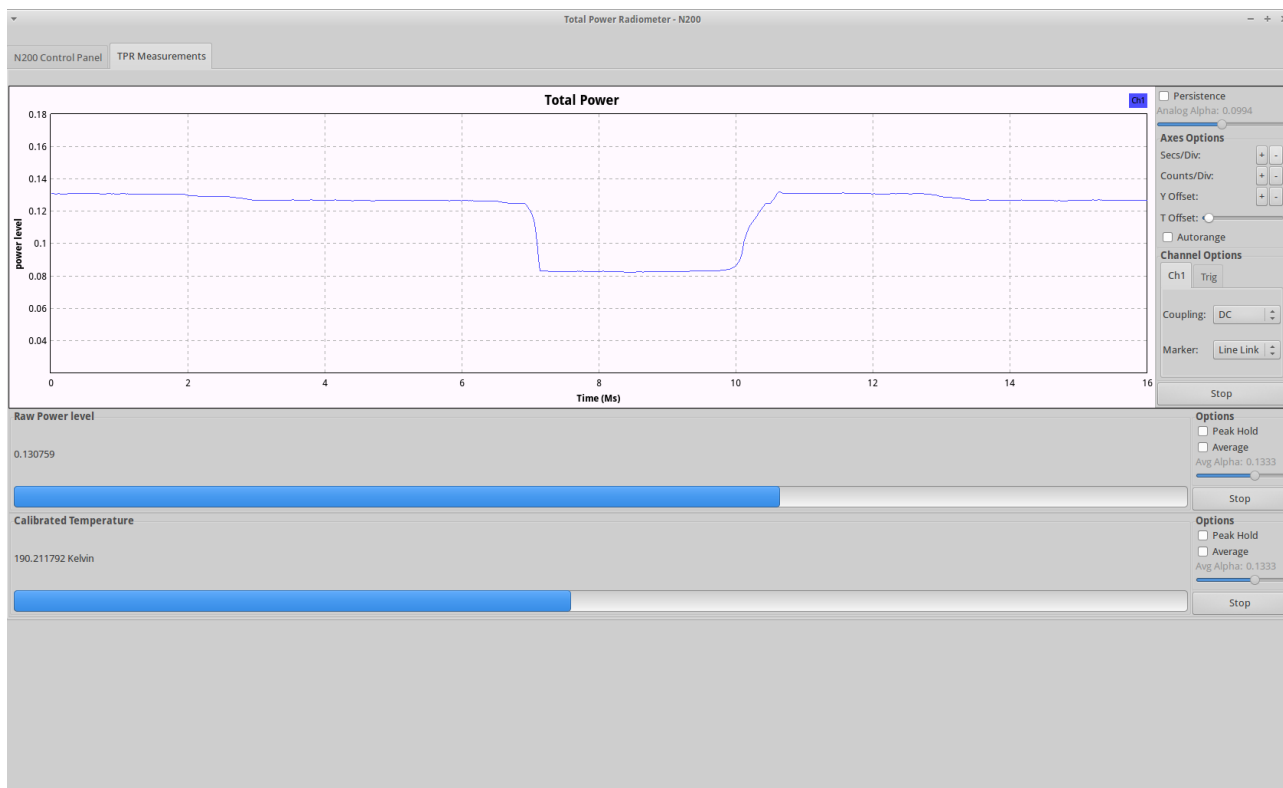


Figure 3.3 A screenshot showing the ticker tape display for the total power readings. In addition raw and calibrated noise temperature is shown below.

### 3.6.2 GNURadio Data Processing

GNURadio is capable of storing information in files that can be processed later. These files are binary formats that are stored in a little-endian format and can be a character, integer, float or complex. A simple example is storing the raw I/Q values to a file. This file can then be processed by Python, GNURadio, or even Matlab. For example, we can store the raw I/Q values and then play them back through GNURadio. Of course other information can be stored as well and we use this same method to store the total power radio values to a file as well.

Matlab is one tool we can use to process the information that is stored by GNURadio. Appendix A contains the Matlab source that will read the total power file generated by GNURadio. It then calculates information such as the NE  $\Delta T$  and the calibration points based on the user input. We can also use Matlab to graph this information as well.



## CHAPTER 4. Experimental Setup

Testing and verification ensures that the new components that we have added to the system are working as intended and has not caused a negative impact on the overall system performance. To do this, several tests were conducted and verification was obtained by using a well known method of detecting power in a radiometer, a square-law detector.

Testing began with the square-law detector as this was one of the first components that was obtained. Next, testing was done with the the software defined radio as a whole. Finally a cold bath test was done with both the software defined radio and with the square law detector as a system to verify both functionality and to compare the results from both devices.

In addition to these tests, a few real world tests were also done in the Spring of 2012 and the Spring of 2014. These tests were conducted by Dr. Brian Hornbuckle's E E 518 class was conducted as part of their lab requirement for the test. These test results can be found in Appendix 2.

### 4.1 Square-law Detector

To verify the results of the information that the software defined radio is obtaining, a square-law detector is used to measure the power of the incoming signal in parallel to the software defined radio. The incoming signal is split using a power divider so that the signal will be the same to both devices with the exception of the 3 dB plus insertion loss the power divider adds. This allows us to verify the software defined radio with a proven system. Square-law detectors have traditionally been used in radiometers and have been proven to work in radiometer applications. They are also a very simple device which means there is little that can go wrong with using them.

#### 4.1.1 Analog Devices ADL5902

The square-law detector that we obtained is the Analog Devices ADL5902. The ADL5902 is a true rms responding power detector that has a square law detector, a variable gain amplifier and an output driver. It also has a temperature sensor and will compensate for temperature variations. The output driver allows for the small signal from the square law detector to be amplified to a level that most analog to digital devices can detect. This driver however does have low noise and has a noise output of approximately  $25nV/\sqrt{Hz}$  at 100 kHz. The ADL5902 operates from 50 MHz to 9 GHz and in most cases can detect down to  $-60$  dBm. This works well in our application since the radiometer operates at 1.4 GHz and after the amplification stage we usually see between  $-40$  to  $-30$  dBm of power.

The specifications of the ADL5902 can be seen in Table 4.1 shown below.

Table 4.1 ADL5902 Specifications

<b>Parameter @ 900 MHz</b>	<b>Value</b>	<b>Units</b>
Frequency Range	50 to 9000	MHz
Dynamic Range	61	dB
Minimum Input Level, $\pm 1.0$ dB	60	dB
Maximum Input Level, $\pm 1.0$ dB	1	db
Logarithmic Slope	53.7	mV/dB
Output Voltage Range	0.03 to 4.8	V

The ADL5902 outputs an analog signal that falls between 0.03 volts and 4.8 volts. It outputs a change of 53.7 millivolt per dB detected by the ADL5902.

#### 4.1.2 Data acquisition and storage

In order to analyze the data, a method was developed to acquire the data and store it for later use. For the N200 software defined radio, this is done automatically by the GNURadio program. Both the complete signal and the power information is stored to a file for later analysis. The square-law detector however outputs information as an analog voltage that is linearly proportional to the RF power measured. This required a system that can capture the analog signal from the ADL5902 and then send the data to be stored. This was accomplished by using a National Instruments USB-6009 data acquisition unit. This unit has 8 analog inputs

that can sample up to 48 kps with a resolution of 14-bits. This was more than adequate for our needs. To use the USB-6009 a fairly simple Lab View program was created. This program retrieved the information from the USB-6009 and stored the data in both Lav View's binary format and in a more human friendly ASCII format. The USB-6009 then connects to a host computer through the USB interface. This made obtaining the data and using device fairly straightforward to use.

#### 4.1.2.1 Lab View Acquisition program

The Labview program was created to talk to the USB-6009 and then store the data. In addition, it is able to display in real time the current readings coming from the USB-6009. This was beneficial during testing of the program but is also good information to have while running an experiment.

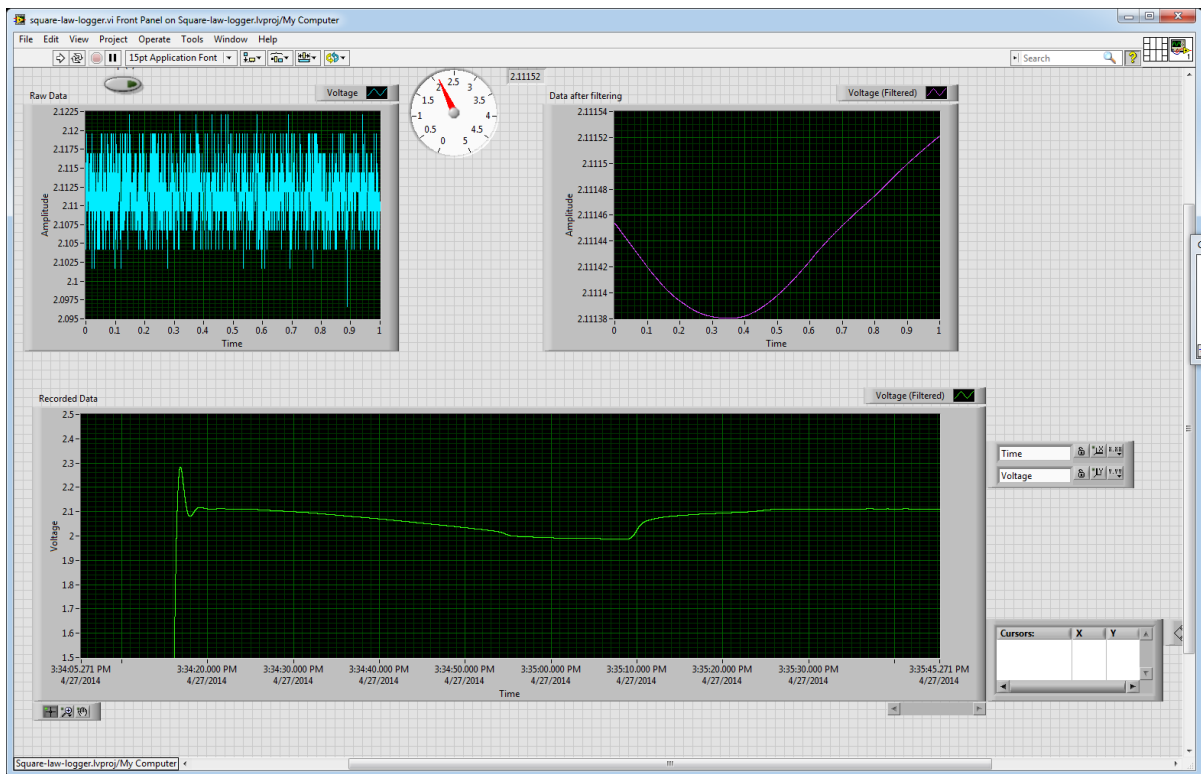


Figure 4.1 A screenshot of the Labview GUI interface

The Labview program uses NI's DAQ assistant which allows for quick configuration and

setup for the computer to talk to a number of NI devices. Labview also includes blocks that allows us to easily record the data to a file. These blocks made up most of the program and resulted in a program that was quickly made.

While the USB-6009 allows up to 48,000 samples per second, we don't need such a high rate. A rate of 1,000 samples per second was determined to provide more than enough samples of data. With such a high rate of samples however, the resulting output will be noisy due to the natural noise found in the RF signal. Like the software defined radio, we want to filter this noise as well to produce a smoother output. This was accomplished using a filter block in Labview to help reduce the noise.

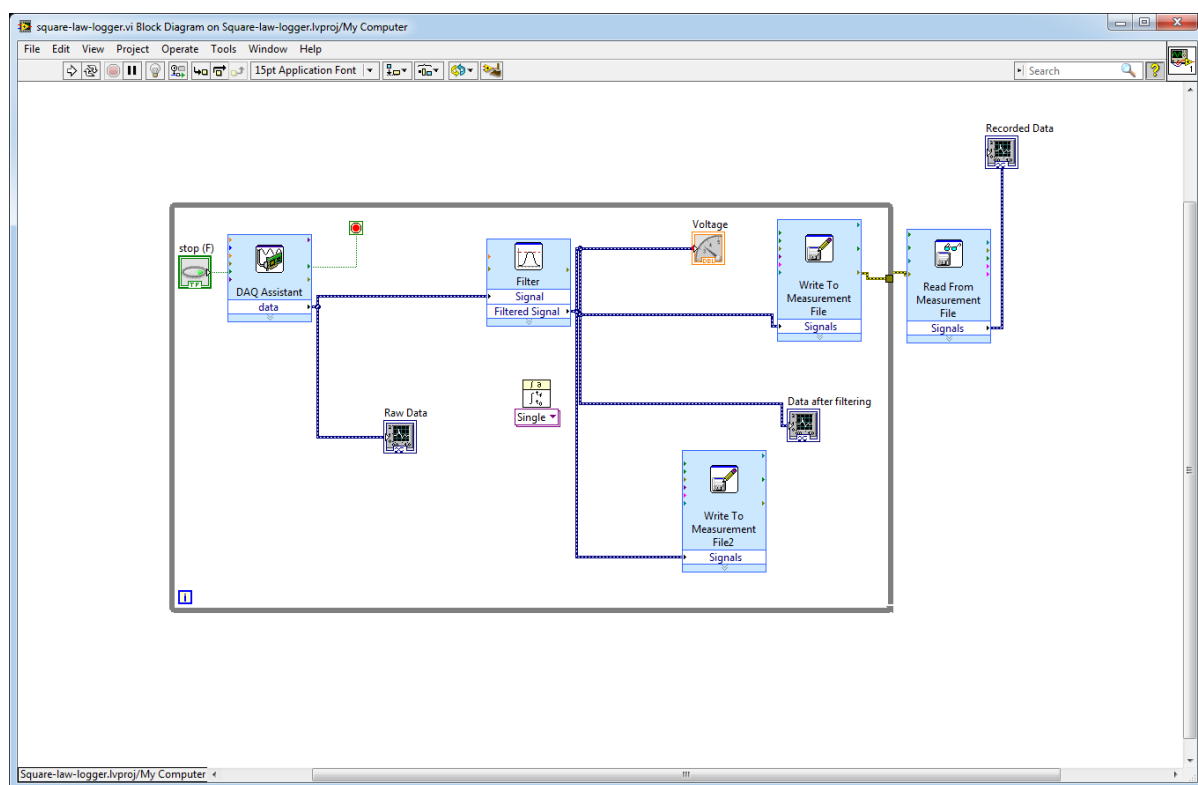


Figure 4.2 A screenshot of the Labview block diagram

This program allowed for the data from the square law detector to be easily recorded. Using Labview also allows us to customize the interface more to our liking and other features such as adding calibration information can also be added as well.

### 4.1.3 Tests on the ADL5902

To test the ADL5902 a signal generator was used that had a controlled output. The specific signal generator that was used was an older model that allowed us to change the output in 10 dBm increments. The signal generator was also configured for 1.4 GHz as that is the frequency the ISU radiometer is configured to listen at. Ideally a noise generator would have been desirable, however a noise generator with adjustable power output could not be located on campus.

The ADL5902 is available from Analog Devices in an evaluation board. This board pairs the ADL5902 with a AD7466 12-bit analog to digital converter. This board can then be mated with Analog Devices BlackFin processor which acts as a USB gateway for the AD7466 data. A test program written in LabView is also provided as well.

The test program provided by Analog Devices allows us to query the ADL5902 and record the raw ADC value. The test program also allows us to enter in the frequency used during testing and the temperature during the test. The test program also allows us to calibrate the system as well. All of the data is then stored into an Excel spreadsheet which can be accessed later.

For this test we used the signal generator set to 1.4 GHz and started at  $-60$  dBm for the output signal. This was selected as this is the lowest the square law detector can detect. The output power was then incremented on the signal generator in 10 dBm steps. There was no change to any other parameter. This was done up to 0 dBm. Any higher and there was risk of damage to the ADL5902. This test was then repeated several times and was done with the signal generator stepping up from  $-60$  dBm to 0 dBm and from 0 dBm to  $-60$  dBm.

The data collected was then graphed using Excel. The graph shown in [4.3](#) Shows that the ADL5902 has a linear output and matches the expected value based on the input.

The ADL5902 test board was considered to be used in the final design for the ISU radiometer and in additional tests. However, Analog Devices decided to make the information to communicate with the BlackFin processor proprietary and this hampered attempts to integrate that system into our overall system design. For this reason, it was decided to simply record the

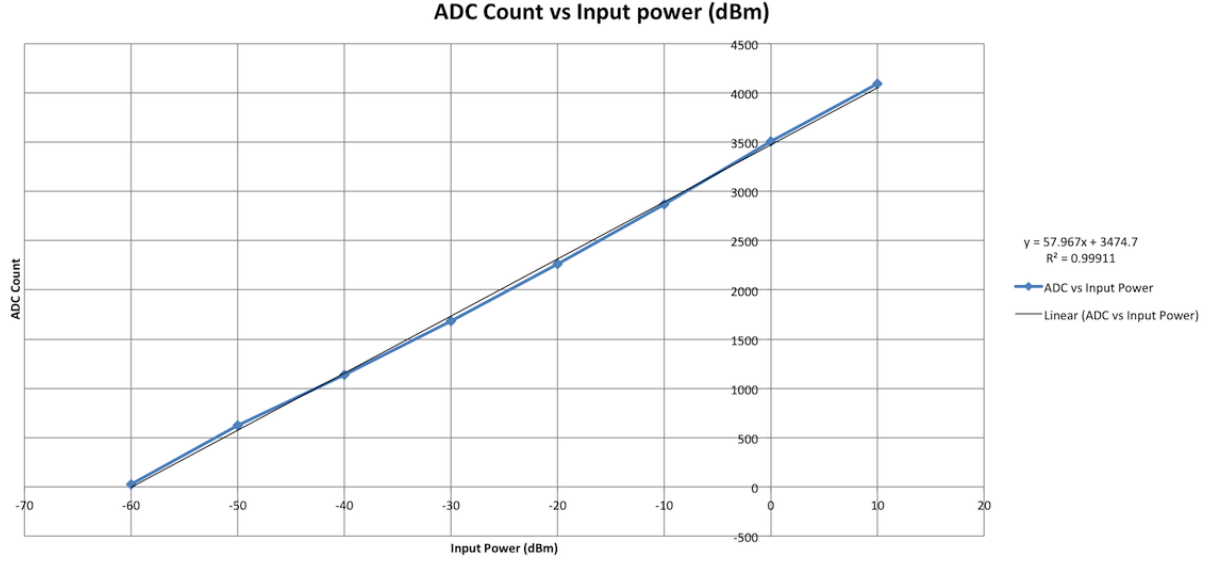


Figure 4.3 Graph showing the linearity of the ADL5902

analog data that the ADL5902 itself puts out and a PIC32 with an analog to digital converter was used to capture and send this information.

## 4.2 Software Defined Radio tests

Once it was confirmed that the square-law detector was working within the specifications that were given, testing then moved to the software defined radio. Once the Python program was established for replicating a total power radiometer in software, this was then loaded into GNURadio and used to control the N200 SDR. GNURadio has a built in noise generator that was then used to test the program and it's ability to measure small changes in noise. This simulated noise verified that the program written was able to detect changes in noise power using a simulated Gaussian source. It was desired to also use a hardware based noise generator, however a suitable noise generator could not be located on campus.

## 4.3 Total Power Radiometer Test with Ice Water Bath

To fully test both the total power radiometer in the software defined radio and the square-law detector, a cold water bath experiment was established to verify that both the square-law

detector and SDR was able to measure real world changes in the noise. In addition, this would also give us a calibration line to to calibrate the radiometer.

#### **4.3.1 Laboratory Setup**

For this experiment the, ISU radiometer was setup in a laboratory that had access to measurement tools. To measure the change in noise, a 50 ohm matched load was attached to the radiometer. The ISU radiometer, with the current filters and LNAs would then amplify and filter the signal. This signal was then measured by the square-law detector and the N200 SDR. The 50 ohm load was then submersed into a hot or cold bath. These water baths were temperature controlled for 100 degrees Centigrade and to 10 degrees Centigrade. The load was submersed in each bath for 2 minutes to allow for it to reach the same temperature as the bath. The noise measured was then recorded using GNURadio with the N200 SDR or with the PIC32 setup on the square-law detector. In addition to the total power measurements, the raw I-Q data was also recorded. This allowed us to replay the experiment through GNURadio for further study.

#### **4.3.2 Test Results**

Several experiments were conducted with this cold-bath configuration to establish that the results were reproducible. In each case, the experiment showed that both the square-law detector and the SDR were able to measure a change of noise temperature. The experiment used a change of only 50 C and the change was easily recorded on the SDR. Using the experiment described in which the temperatures were held constant, this also gave us a calibration point that we can use to calibrate the radiometer.

### **4.4 Liquid Nitrogen Test**

The Liquid Nitrogen Test was conducted to verify that the radiometer was able to operate within the specifications that were given for the radiometer. This test is also a fairly common test for testing and calibrating a traditional type of radiometer. With this test, we can test the radiometer by measuring extreme values for the noise temperature. To do this, we submerge

a matched load attached to the radiometer into a liquid nitrogen bath. This cools the load, which represents our source, to a physical temperature of approximately 77 Kelvin. We can then select several "warmer" temperatures such as a ice water bath, room temperature or even boiling water. Since we expect that the radiometer is linear in how it responds to these noise temperatures, we can then build a calibration line for the radiometer.

#### 4.4.1 Testing Apparatus

To run this test, we need to have some equipment for this. First and foremost, we need a radiometer. For this test we used the ISU Radiometer front end, with the LNAs and bandpass filters in place. The noise diode was turned off for these experiments. A fifty ohm matched load was then attached to low loss coax and represented our source to the radiometer. Finally, the output of the radiometer was run to the Ettus N200 software defined radio instead of running the on-board Analog to Digital converter and FPGA. The data from the N200 was then sent to a computer running GNURadio and the custom software that I had written. This data is sent to the computer through a 1 gigabit Ethernet connection due to the large bandwidth coming from the N200.

#### 4.4.2 Calibration and verification experiment

The first test run was conducted to help verify that the radiometer was operating correctly and to start to build up data for calibration. This test was conducted by placing the matched load into the liquid nitrogen bath, which has a boiling temperature of 77 K and then putting the matched load into a ice water bath which has a temperature of 273.15 K. This would give us two points to figure out a calibration point.

During this experiment both the square law data and data from the software defined radio was recorded. This information was then feed into a Matlab script that is able to read the data files, perform the needed calculations and then plot the data.

This experiment showed that both the square-law detector and the software defined radio was able to detect changes in the noise temperature. It was also able to show that once calibrated, both showed identical results.



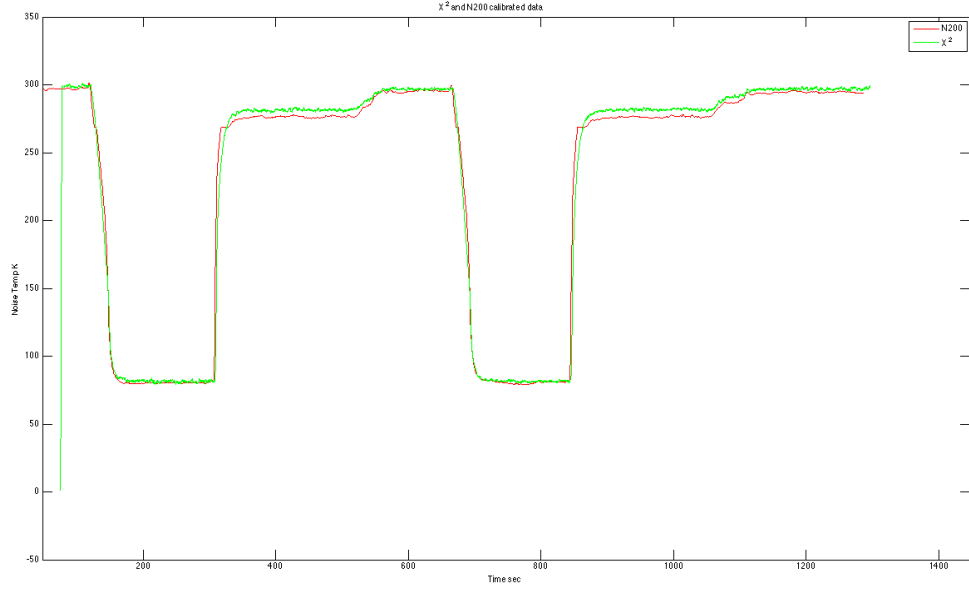


Figure 4.4 Graph showing both the square-law detector and the software defined radio total power readings.

## 4.5 Testing with an injected noise source

The addition of an unwanted signal can be a determinant to the radiometer and has an adverse affect on how the radiometer operates. In today's world though, it is getting more difficult to control intentional radiators as the RF spectrum becomes crowded with more devices. This problem becomes even a greater problem with radiometers used in orbiting spacecrafts as they are able to "see" large areas[Misra et al. (2012)]. Even though the band we are working in of 1.4 GHz is an internationally protected frequency, there can still be both intentional and unintentional radiators that cause interference. This has been seen in some of the SMOS satellite data.

RFI detection and mitigation is not a new topic in radiometry and there have been other methods in both the detection and mitigation of these signals[Forte et al. (2013)][McIntyre and Gasiewski (2012)][De Roo et al. (2007)][Ellingson et al. (July)].

This test was designed to test a problem that a software defined radio would be to cope with while a square law detector would not be able to cope with it. This test injected a known

signal at 1.406 GHz to interfere with the normal operation of the radiometer. In this test, the square law detector, since it is a wide band device, would not be able to accurately measure the change in the total power of the signal. However, the SDR is able to create a digital filter to filter out the offending signal. Since this is done in software, the SDR is able to adapt to changes much faster than an analog radiometer.

#### **4.5.1 Test setup**

To test this theory, a similar setup was used as with previous tests. The ISU radiometer's RF front end was once again used to amplify the signal. One difference however is that a power combiner, which is the same as a power divider, was used to hook up to a signal generator. The signal generator then provided the offending signal. By using the signal generator we can control how much power and what frequency the offending signal is at. In this case we are performing this in a controlled setup and would know ahead of time where the offending signal is. In the future the SDR defined could identify the offending signal and then filter it out.

Like the other tests, a power divider is used to split the signal after the ISU radiometer RF front end which was then feed to a square-law detector and then the N200 SDR. The square-law detector was then hooked up to a National Instruments USB-6009 DAQ. The DAQ was then feed into a labview program to be processed and recorded. The N200 continued to use the GNURadio program that was created to record the total power coming out. However, it has been modified with a band reject filter to filter the offending signal.

#### **4.5.2 Test results**

insert test results

### **4.6 Further testing**

As discussed earlier, there are some known issues with the RF Front end of the radiometer. This needs to be explored in more detail or the RF front end may need to be rebuilt. The issue appears to stem that movement on the RF Front end is causing something to become lose or causes for some local interference to impact the radiometer. When the radiometer

is stationary, it appears to operate normally. However, as the radiometer is designed to be mounted on a rotational platform and point to the sky for calibration, the movement issue needs to be addressed.

## CHAPTER 5. PERFORMANCE AND EVALUATION

Radiometers measure power and it is this information that we can use to determine information about a certain target. This power however is often expressed in terms of an equivalent temperature and if we are looking at an object, this is the brightness temperature of that object. The primary function of the radiometer is to measure the power that is seen at the radiometer's antenna. Ideally this is the brightness temperature of an object of interest. In our case, this is usually looking at the ground or soil sample. Thus the goal of the radiometer is to measure this antenna temperature with sufficient resolution and accuracy that a correlation can be made between the antenna temperature and the object's temperature that we are studying.

### 5.1 Performance of a radiometer

The performance of a radiometer can be measured by looking at both the sensitivity and the accuracy of the radiometer. In addition, we need to be concerned with the stability of the radiometer as this affects the accuracy of the radiometer.

#### 5.1.1 Sensitivity

Sensitivity of the radiometer relates to the amount of power that the radio selects from the antenna. This selection is then dependent on the bandwidth that the radiometer is able to listen to. The radiometer however detects not only the signal of interest but also receives a noise signal as well. This noise is added to the signal and can not be separated from the signal. Because this noise is added to the signal, we must be able to determine a change in the signal while the noise signal is also present.

Power from the radiometer can be expressed in equation 2.2 from chapter 2, where we take into consideration bandwidth, gain and the input from the antenna plus the noise added from

the antenna.

Sensitivity relates to being able to distinguish one signal from the other. In other words, we must be able to distinguish, or detect, our wanted signal from noise that is present in the signal. To demonstrate this, consider a system that has a system noise temperature of 700K and an antenna temperature of 300K. This gives us a total noise temperature of 1000K. Therefore, if we wish to detect a change of 1K, we need to be able to detect between 1000K and 1001K.

Since our signal is really random fluctuations about a mean power input to our system, we can reduce the fluctuations by averaging or integrating the signal. This results in equation 5.1 which is derived in chapter 2.

$$\Delta T = \frac{T_A + T_N}{\sqrt{\beta * \tau}} \quad (5.1)$$

This equation gives us the radiometer sensitivity based on the input, which is both the noise and input signal with consideration to the bandwidth and integration time, or averaging, that is done to the signal.

### 5.1.2 Accuracy and Stability

Stability and accuracy are additional problems that need to be considered when looking at the radiometer system. To begin we can once again look at the power received equation that we discussed in Chapter 2 and is equation 2.2.

As we look at this equation, we can see that if  $k$ ,  $B$ ,  $G$ , and  $T_N$  are constant, then stability can be assured.  $k$  is a known constant and we can also assume that our bandwidth,  $B$ , will also remain constant, or at least while we are taking our measurements. Gain and the noise temperature however can vary.

Gain is usually our largest factor that can change on a radiometer and even with a software defined radio this is still a large source of variation. This is due to the analog nature of the amplifiers that affect a large portion of the gain in our system. Various things can affect our gain, but the two largest factors is the physical temperature of the amplifier and the voltage that feeds the amplifier. Voltage can be controlled to a degree. High accuracy voltage regulators can help control fluctuations in voltages that can in turn affect the gain. A factor however

that is harder to control is temperature. It is because of this that the current ISU radiometer has gone to great strides to control the temperature of the amplifiers to maintain a constant temperature.

## 5.2 Required Performance Requirements

To help us quantify the required performance of the radiometer, we looked to what the existing ISU radiometer had in terms of performance. These performance numbers were in part determined by Dr. Brian Hornbuckle but also derived from existing radiometers. As stated earlier, although a radiometer measures power, we often convert this to an equivalent brightness temperature. Specifically, we are looking at the brightness temperature of the antenna added to the brightness temperature of the object of interest. We also have to be able to detect a minimum amount of power. Since changes in noise can be small, the better the sensitivity of the radiometer, the better we can detect these small changes.

The requirements given are outlined in the table below.

Table 5.1 Required Radiometer performance

Parameter	Value	Units
Minimum bandwidth	20	MHz
Operational frequency	1400 - 1425	MHz
$NE\Delta T$	1	Kelvin

## 5.3 Square-law Detector Performance

The Square-law detector was added to our system in order to give us another reference point and to help verify the power output that the software defined radio. The performance of our square-law detector is based on two items. The first is the actual square-law detector itself. The sensitivity of this device accounts for most of the performance factor of the system. In our system the output of this square-law detector is then feed directly into an analog to digital converter. Therefore the performance of this A/D converter needs to be accounted for as well [Terlep (2002)].

## 5.4 Software Defined Radio Performance

Performance of the software defined radio is governed by the system that takes in the RF signal and then digitizes the signal. Once the signal is in digital form, we no longer are concerned about loss of performance due to additional noise that may get added to the system. For this reason, we attempt to digitize the signal as soon as possible.

## CHAPTER 6. Conclusion and Future work

### 6.1 Conclusion

In this thesis we have shown that an off the shelf SDR can be used to perform as a radiometer. Using a SDR has several advantages such as a more flexible system and can result in a less expensive system. Since a SDR offers high flexibility, changes to the system can be done very quickly and helps in future proofing the system. Since off the shelf components were used, it also allowed for a lower cost system that is able to perform variations of power detection in a radiometer without adding more costly RF components. Finally, this type of radiometer is very flexible and allows for it to adapt to possible changing conditions. This again happens with no change to the RF hardware and instead happens within the software of the system.

### 6.2 Future work

The main purpose of this research is to demonstrate and prove that an off the shelf software defined radio is capable of operating like a radiometer and can do so within the same or better specifications that are seen in most radiometers today. To do that, we used a very basic radiometer setup and configured our SDR to behave as a single input radiometer. It was also assumed that the input from the RF front end of the radiometer was stable, which in our case was accomplished by stabilizing the temperature of the active components in the RF Front end.

However, this temperature stabilization requires extra weight and bulk to be added to the radiometer. In the application that the ISU radiometer was designed for, this was not a major drawback to the system. However other applications may require a system that does not have this type of temperature stabilization. For those type of systems, other radiometers use different



methods to account for and adjust for fluctuations in the RF front end.

### 6.2.1 Improving on the FPGA firmware

For this thesis we focused on the software that would run on a PC or comparable computer system running a full OS like Linux. While this aids to speed up development and works just fine for testing the theory on a off the shelf SDR acting as a radiometer, it does require additional hardware. For some applications of a radiometer, this is not a huge concern. In the case for the ISU radiometer, the concern is not that large since the radiometer is not designed to be "portable" and requires additional support equipment such as a generator anyway. However, other remote sensing applications, such as space based applications, would require a more efficient method. It is very possible to move the software generated in GNURadio into the firmware of the N200. This will help to offload the work needed by the computer and would allow for the computer or similar system to act as more of a control method and for data storage.

### 6.2.2 Correlation

One such method is to correlate the information with another input which can be another antenna looking at the same source or can be two polarization from the same antenna. This results in two receiver systems looking at the same source and you have two signals,  $S_1$  and  $S_2$ . Since we are looking at the same source, both signals will be correlated in time, and when multiplied they will provide an output proportional to the strength of the source signal. The noise introduced by each receiver will then have a lower correlation due to the random nature of the noise. This results in a radiometer with a greater sensitivity due to the reduction of the noise even though two receivers are used [Fujimoto (Mar)].

The N200 software defined radio was chosen as it is capable of having two different daughter-cards plugged in. Therefore it is possible to have both sources enter the software defined radio and once digitized we can sum the magnitudes of the two incoming sources. This is quite easy to do and is shown in figure 6.1.

Although figure 6.1 shows a correlating software defined radio radiometer, it has not been

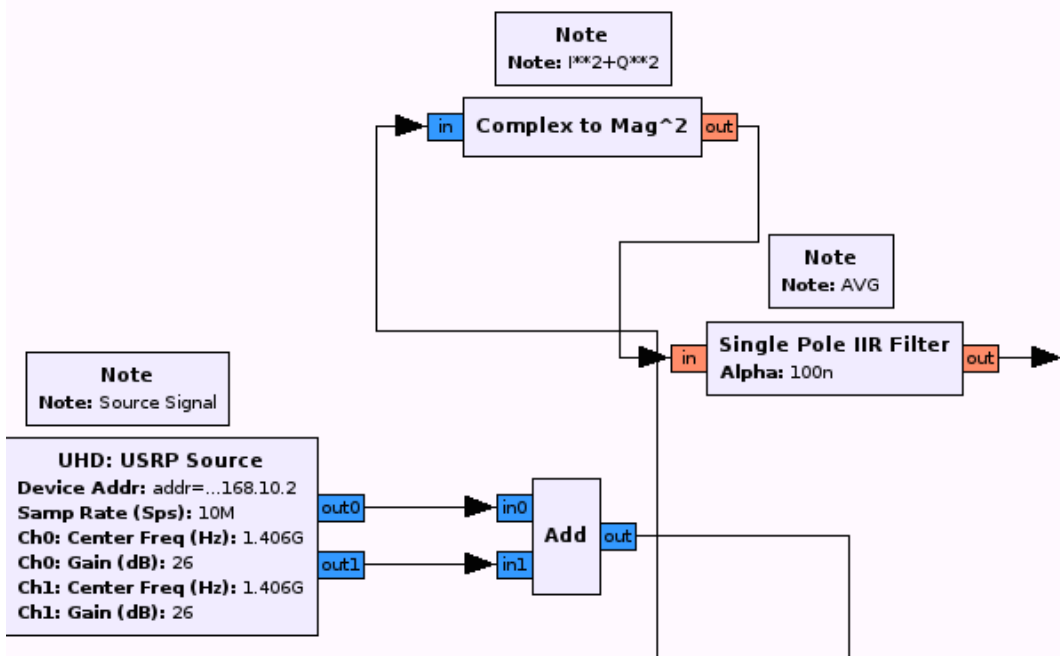


Figure 6.1 The key blocks used for creating a correlating radiometer in software. The key blocks is the USRP source, which allows us to address both daughter-boards and the ADD block which sums the signals.

tested. In theory, this should correlate the signal and improve the sensitivity of the radiometer, however further testing is needed.

### 6.2.3 Improving stability with a feedback loop

One of the largest challenges with a radiometer is improving the stability of the radiometer. Drifts in temperature can greatly affect the gains from the LNAs and also change how much noise all of the components in the radiometer contribute. A software defined radio can help as we are digitizing the signal as soon as possible. This helps in eliminating the analog components for power detection and even for filtering, but does not eliminate all of the physical hardware, mainly the LNAs. In this thesis, we did not focus on this issue since the RF front end of the ISU radiometer is temperature controlled. All components are mounted to an aluminum block which is attached to a thermal electric cooler. This system then maintains the temperature within 1 degree C.

However a more compact, lower cost and easier setup would be to just have the LNAs

attach directly to the SDR without any temperature compensation. While this can be done, we have now lost stability in the LNAs and we need to compensate for that. One method that is discussed by William Goggins is to use a feedback loop to continuously adjust a variable attenuator [Goggins (Jan)]. In Goggins paper, he discusses using a servo that mechanically controls the attenuator. However since we are in the digital domain, we can control this all in software, and doing a feedback loop is quite easy for a computer to do.

## APPENDIX A. Source code

The following is the Python code used with the Ettus N200 software defined radio. This python code should work on any platform that has the GNURadio libraries installed and also the USRP drivers for communicating with the N200. This code can also be easily modified to communicate with any SDR that GNURadio can communicate with.

This script was developed using GNURadio Companion. This copy of the script may be out of date. The latest version of the script file can be found on the author's personal website, <http://www.rfgeeks.com/research/master-s-thesis>.

### Python code for total power radiometer

---

#### Total Power Radiometer

```
#!/usr/bin/env python
#####
# Gnuradio Python Flow Graph
# Title: Total Power Radiometer - N200
# Author: Matthew E Nelson
# Description: Total power radiometer connecting to a N200 SDR
# Generated: Fri Jun 13 00:21:53 2014
#####

from datetime import datetime
```

```

from gnuradio import blocks
from gnuradio import eng_notation
from gnuradio import filter
from gnuradio import gr
from gnuradio import uhd
from gnuradio import wxgui
from gnuradio.eng_option import eng_option
from gnuradio.fft import logpwrfft
from gnuradio.fft import window
from gnuradio.filter import firdes
from gnuradio.wxgui import fftsink2
from gnuradio.wxgui import forms
from gnuradio.wxgui import numbersink2
from gnuradio.wxgui import scopesink2
from grc_gnuradio import blks2 as grc_blks2
from grc_gnuradio import wxgui as grc_wxgui
from optparse import OptionParser

import time

import wx

class N200_TPR(grc_wxgui.top_block_gui):

    def __init__(self, tpint=2.0, dcg=1, rfgain=0.0, frequency=1.406e9, decl
        grc_wxgui.top_block_gui.__init__(self, title="Total Power Radiometer
        _icon_path = "/usr/share/icons/hicolor/32x32/apps/gnuradio-grc.png"
        self.SetIcon(wx.Icon(_icon_path, wx.BITMAP_TYPE_ANY))

#####

```

```
# Parameters
```

```
#####
```

```
self.tprint = tprint
self.dcg = dcg
self.rfgain = rfgain
self.frequency = frequency
self.decln = decln
self.srate = srate
self.clock = clock
self.fftsize = fftsize
self.maxg = maxg
self.subdev = subdev
self.spa = spa
self.rxant = rxant
self.devid = devid
```

```
#####
```

```
# Variables
```

```
#####
```

```
self.israte = israte = srate
self.samp_rate = samp_rate = int(israte)
self.prefix = prefix = "tpr_"
self.variable_static_text_0_0_0_0 = variable_static_text_0_0_0_0 = c
self.variable_static_text_0_0_0 = variable_static_text_0_0_0 = devid
self.variable_static_text_0_0 = variable_static_text_0_0 = subdev
self.variable_static_text_0 = variable_static_text_0 = israte
self.spec_data_fifo = spec_data_fifo = "spectrum_" + datetime.now().
self.spavg = spavg = int(spa)
```

```

self.scope_rate = scope_rate = 2
self.recfile_tpr = recfile_tpr = prefix + datetime.now().strftime("%
self.recfile_kelvin = recfile_kelvin = prefix+"kelvin" + datetime.no
self.rec_button_tpr = rec_button_tpr = 1
self.rec_button_iq = rec_button_iq = 1
self.noise_amplitude = noise_amplitude = .5
self.integ = integ = tpint
self.idecln = idecln = decln
self.gain = gain = 26
self.freq = freq = frequency
self.file_rate = file_rate = 2.0
self.fftrate = fftrate = int(samp_rate/fftsize)
self.det_rate = det_rate = int(20.0)
self.dc_gain = dc_gain = int(dcg)
self.calib_2 = calib_2 = -342.774
self.calib_1 = calib_1 = 4.0755e3
self.add_noise = add_noise = 0

#####

# Blocks

#####

self.Main = self.Main = wx.Notebook(self.GetWin(), style=wx.NB_TOP)
self.Main.AddPage(grc_wxgui.Panel(self.Main), "N200 Control Panel")
self.Main.AddPage(grc_wxgui.Panel(self.Main), "TPR Measurements")
self.Add(self.Main)

_spavg_sizer = wx.BoxSizer(wx.VERTICAL)
self._spavg_text_box = forms.text_box(
    parent=self.Main.GetPage(0).GetWin(),

```

```

        sizer=_spavg_sizer ,
        value=self.spavg ,
        callback=self.set_spavg ,
        label="Spectral Averaging (Seconds)",
        converter=forms.int_converter(),
        proportion=0,
    )

self._spavg_slider = forms.slider(
    parent=self.Main.GetPage(0).GetWin(),
    sizer=_spavg_sizer ,
    value=self.spavg ,
    callback=self.set_spavg ,
    minimum=1 ,
    maximum=20 ,
    num_steps=20 ,
    style=wx.SL_HORIZONTAL ,
    cast=int ,
    proportion=1,
)

self.Main.GetPage(0).GridAdd(_spavg_sizer , 1, 1, 1, 1)

self._rec_button_tpr_chooser = forms.button(
    parent=self.Main.GetPage(0).GetWin(),
    value=self.rec_button_tpr ,
    callback=self.set_rec_button_tpr ,
    label="Record TPR Data",
    choices=[0,1] ,
    labels=['Stop', 'Start'] ,
)

```



```

self.Main.GetPage(0).GridAdd(self._rec_button_tpr_chooser, 4, 1, 1,
self._rec_button_iq_chooser = forms.button(
    parent=self.Main.GetPage(0).GetWin(),
    value=self.rec_button_iq,
    callback=self.set_rec_button_iq,
    label="Record I/Q Data",
    choices=[0,1],
    labels=['Stop', 'Start'],
)

self.Main.GetPage(0).GridAdd(self._rec_button_iq_chooser, 4, 0, 1, 1
self._israte_chooser = forms.radio_buttons(
    parent=self.Main.GetPage(0).GetWin(),
    value=self.israte,
    callback=self.set_israte,
    label="Sample Rate (BW)",
    choices=[1e6,2e6,5e6,10e6,25e6],
    labels=['1 MHz', '2 MHz', '5 MHz', '10 MHz', '25 MHz'],
    style=wx.RA_HORIZONTAL,
)

self.Main.GetPage(0).GridAdd(self._israte_chooser, 1, 3, 1, 1)
_integ_sizer = wx.BoxSizer(wx.VERTICAL)
self._integ_text_box = forms.text_box(
    parent=self.Main.GetPage(0).GetWin(),
    sizer=_integ_sizer,
    value=self.integ,
    callback=self.set_integ,
    label="Integration Time (Seconds)",
    converter=forms.float_converter(),

```

```

        proportion=0,
    )
    self._integ_slider = forms.slider(
        parent=self.Main.GetPage(0).GetWin(),
        sizer=_integ_sizer,
        value=self.integ,
        callback=self.set_integ,
        minimum=1,
        maximum=60,
        num_steps=100,
        style=wx.SL_HORIZONTAL,
        cast=float,
        proportion=1,
    )

    self.Main.GetPage(0).GridAdd(_integ_sizer, 0, 2, 1, 1)
    _gain_sizer = wx.BoxSizer(wx.VERTICAL)
    self._gain_text_box = forms.text_box(
        parent=self.Main.GetPage(0).GetWin(),
        sizer=_gain_sizer,
        value=self.gain,
        callback=self.set_gain,
        label="RF Gain (dB)",
        converter=forms.float_converter(),
        proportion=0,
    )

    self._gain_slider = forms.slider(
        parent=self.Main.GetPage(0).GetWin(),
        sizer=_gain_sizer,

```

```

        value=self.gain,
        callback=self.set_gain,
        minimum=0,
        maximum=maxg,
        num_steps=100,
        style=wx.SL_HORIZONTAL,
        cast=float,
        proportion=1,
    )
    self.Main.GetPage(0).GridAdd(_gain_sizer, 0, 1, 1, 1)
    self._freq_text_box = forms.text_box(
        parent=self.Main.GetPage(0).GetWin(),
        value=self.freq,
        callback=self.set_freq,
        label="Center Frequency (Hz)",
        converter=forms.float_converter(),
    )
    self.Main.GetPage(0).GridAdd(self._freq_text_box, 0, 0, 1, 1)
    self._dc_gain_chooser = forms.radio_buttons(
        parent=self.Main.GetPage(0).GetWin(),
        value=self.dc_gain,
        callback=self.set_dc_gain,
        label="DC Gain",
        choices=[1, 10, 100, 1000, 10000],
        labels=[],
        style=wx.RA_HORIZONTAL,
    )
    self.Main.GetPage(0).GridAdd(self._dc_gain_chooser, 1, 0, 1, 1)

```

```

self._calib_2_text_box = forms.text_box(
    parent=self.Main.GetPage(0).GetWin(),
    value=self.calib_2,
    callback=self.set_calib_2,
    label="Calibration value 2",
    converter=forms.float_converter(),
)

self.Main.GetPage(0).GridAdd(self._calib_2_text_box, 3, 1, 1, 1)

self._calib_1_text_box = forms.text_box(
    parent=self.Main.GetPage(0).GetWin(),
    value=self.calib_1,
    callback=self.set_calib_1,
    label="Calibration value 1",
    converter=forms.float_converter(),
)

self.Main.GetPage(0).GridAdd(self._calib_1_text_box, 3, 0, 1, 1)

self.wxgui_scopesink2_2 = scopesink2.scope_sink_f(
    self.Main.GetPage(1).GetWin(),
    title="Total Power",
    sample_rate=2,
    v_scale=0,
    v_offset=0,
    t_scale=0,
    ac_couple=False,
    xy_mode=False,
    num_inputs=1,
    trig_mode=wxgui.TRIG_MODE_STRIPCHART,
    y_axis_label="power level",

```

```

)

self.Main.GetPage(1).Add(self.wxgui_scopesink2_2.win)
self.wxgui_numbersink2_0_0 = numbersink2.number_sink_f(
    self.Main.GetPage(1).GetWin(),
    unit="",
    minval=0,
    maxval=.2,
    factor=1,
    decimal_places=6,
    ref_level=0,
    sample_rate=scope_rate,
    number_rate=15,
    average=False,
    avg_alpha=None,
    label="Raw Power level",
    peak_hold=False,
    show_gauge=True,
)

self.Main.GetPage(1).Add(self.wxgui_numbersink2_0_0.win)
self.wxgui_numbersink2_0 = numbersink2.number_sink_f(
    self.Main.GetPage(1).GetWin(),
    unit="Kelvin",
    minval=0,
    maxval=400,
    factor=1,
    decimal_places=6,
    ref_level=0,
    sample_rate=scope_rate,

```

```

        number_rate=15,
        average=False,
        avg_alpha=None,
        label="Calibrated Temperature",
        peak_hold=False,
        show_gauge=True,
    )

    self.Main.GetPage(1).Add(self.wxgui_numbersink2_0.win)

    self.wxgui_fftsink2_0 = fftsink2.fft_sink_c(
        self.Main.GetPage(0).GetWin(),
        baseband_freq=freq,
        y_per_div=10,
        y_divs=10,
        ref_level=50,
        ref_scale=2.0,
        sample_rate=israte,
        fft_size=1024,
        fft_rate=5,
        average=True,
        avg_alpha=0.1,
        title="Spectrum",
        peak_hold=False,
        size=(800,400),
    )

    self.Main.GetPage(0).Add(self.wxgui_fftsink2_0.win)

    self._variable_static_text_0_0_0_0_static_text = forms.static_text(
        parent=self.Main.GetPage(0).GetWin(),
        value=self.variable_static_text_0_0_0_0,
    )

```

```

        callback=self.set_variable_static_text_0_0_0_0,
        label="N200 Clock",
        converter=forms.float_converter(),
    )
    self.Main.GetPage(0).GridAdd(self._variable_static_text_0_0_0_0_stat
    self._variable_static_text_0_0_0_static_text = forms.static_text(
        parent=self.Main.GetPage(0).GetWin(),
        value=self.variable_static_text_0_0_0,
        callback=self.set_variable_static_text_0_0_0,
        label="Device",
        converter=forms.str_converter(),
    )
    self.Main.GetPage(0).GridAdd(self._variable_static_text_0_0_0_static
    self._variable_static_text_0_0_static_text = forms.static_text(
        parent=self.Main.GetPage(0).GetWin(),
        value=self.variable_static_text_0_0,
        callback=self.set_variable_static_text_0_0,
        label="SubDev",
        converter=forms.str_converter(),
    )
    self.Main.GetPage(0).GridAdd(self._variable_static_text_0_0_static_t
    self._variable_static_text_0_static_text = forms.static_text(
        parent=self.Main.GetPage(0).GetWin(),
        value=self.variable_static_text_0,
        callback=self.set_variable_static_text_0,
        label="Samp rate",
        converter=forms.float_converter(),
    )

```

```

self.Main.GetPage(0).GridAdd(self._variable_static_text_0_static_text_0)

self.uhd_usrp_source_0 = uhd.usrp_source(
    device_addr=devid,
    stream_args=uhd.stream_args(
        cpu_format="fc32",
        channels=range(1),
    ),
)

self.uhd_usrp_source_0.set_samp_rate(samp_rate)
self.uhd_usrp_source_0.set_center_freq(freq, 0)
self.uhd_usrp_source_0.set_gain(gain, 0)
(self.uhd_usrp_source_0).set_processor_affinity([0])
self.single_pole_iir_filter_xx_0 = filter.single_pole_iir_filter_ff(
    (self.single_pole_iir_filter_xx_0).set_processor_affinity([1])
)
_noise_amplitude_sizer = wx.BoxSizer(wx.VERTICAL)
self._noise_amplitude_text_box = forms.text_box(
    parent=self.Main.GetPage(0).GetWin(),
    sizer=_noise_amplitude_sizer,
    value=self.noise_amplitude,
    callback=self.set_noise_amplitude,
    label='noise_amplitude',
    converter=forms.float_converter(),
    proportion=0,
)

self._noise_amplitude_slider = forms.slider(
    parent=self.Main.GetPage(0).GetWin(),
    sizer=_noise_amplitude_sizer,
    value=self.noise_amplitude,

```



```

        callback=self.set_noise_amplitude,
        minimum=.01,
        maximum=1,
        num_steps=100,
        style=wx.SL_HORIZONTAL,
        cast=float,
        proportion=1,
    )

    self.Main.GetPage(0).GridAdd(_noise_amplitude_sizer, 3, 2, 1, 1)

    self.logpwrfft_x_0 = logpwrfft.logpwrfft_c(
        sample_rate=samp_rate,
        fft_size=fftsize,
        ref_scale=2,
        frame_rate=fftrate,
        avg_alpha=1.0/float(spavg*fftrate),
        average=True,
    )

    self._idecln_text_box = forms.text_box(
        parent=self.Main.GetPage(0).GetWin(),
        value=self.idecln,
        callback=self.set_idecln,
        label="Declination",
        converter=forms.float_converter(),
    )

    self.Main.GetPage(0).GridAdd(self._idecln_text_box, 1, 2, 1, 1)

    self.blocks_multiply_const_vxx_1 = blocks.multiply_const_vff((calib_
    self.blocks_multiply_const_vxx_0 = blocks.multiply_const_vff((dc_gai
    self.blocks_keep_one_in_n_4 = blocks.keep_one_in_n(gr.sizeof_float*1

```

```

self.blocks_keep_one_in_n_3 = blocks.keep_one_in_n(gr.sizeof_float*1
self.blocks_keep_one_in_n_1 = blocks.keep_one_in_n(gr.sizeof_float*1
self.blocks_file_sink_5 = blocks.file_sink(gr.sizeof_float*fftsize,
self.blocks_file_sink_5.set_unbuffered(True)
self.blocks_file_sink_4 = blocks.file_sink(gr.sizeof_float*1, recfil
self.blocks_file_sink_4.set_unbuffered(True)
self.blocks_file_sink_1 = blocks.file_sink(gr.sizeof_gr_complex*1, p
self.blocks_file_sink_1.set_unbuffered(False)
self.blocks_file_sink_0 = blocks.file_sink(gr.sizeof_float*1, recfil
self.blocks_file_sink_0.set_unbuffered(True)
self.blocks_complex_to_mag_squared_1 = blocks.complex_to_mag_squared
self.blocks_add_const_vxx_1 = blocks.add_const_vff((calib_2, ))
self.blks2_valve_2 = grc_blks2.valve(item_size=gr.sizeof_gr_complex*
self.blks2_valve_1 = grc_blks2.valve(item_size=gr.sizeof_float*1, op
self.blks2_valve_0 = grc_blks2.valve(item_size=gr.sizeof_float*1, op
self._add_noise_chooser = forms.button(
    parent=self.Main.GetPage(0).GetWin(),
    value=self.add_noise,
    callback=self.set_add_noise,
    label="Noise Source",
    choices=[0,1],
    labels=['Off', 'On'],
)
self.Main.GetPage(0).GridAdd(self._add_noise_chooser, 3, 3, 1, 1)

#####

# Connections

#####

```

```

self.connect((self.blocks_multiply_const_vxx_0, 0), (self.blocks_kee
self.connect((self.blocks_keep_one_in_n_1, 0), (self.blks2_valve_0,
self.connect((self.blks2_valve_0, 0), (self.blocks_file_sink_4, 0))
self.connect((self.blocks_multiply_const_vxx_1, 0), (self.blocks_add
self.connect((self.blocks_add_const_vxx_1, 0), (self.wxgui_numbersin
self.connect((self.blocks_add_const_vxx_1, 0), (self.blks2_valve_1,
self.connect((self.blocks_multiply_const_vxx_0, 0), (self.wxgui_numb
self.connect((self.blocks_multiply_const_vxx_0, 0), (self.wxgui_scop
self.connect((self.uhd_usrp_source_0, 0), (self.blks2_valve_2, 0))
self.connect((self.uhd_usrp_source_0, 0), (self.blocks_complex_to_ma
self.connect((self.uhd_usrp_source_0, 0), (self.wxgui_fftsink2_0, 0)
self.connect((self.blocks_keep_one_in_n_1, 0), (self.blocks_multiply
self.connect((self.blks2_valve_2, 0), (self.blocks_file_sink_1, 0))
self.connect((self.uhd_usrp_source_0, 0), (self.logpwrfft_x_0, 0))
self.connect((self.logpwrfft_x_0, 0), (self.blocks_keep_one_in_n_3,
self.connect((self.blks2_valve_1, 0), (self.blocks_file_sink_0, 0))
self.connect((self.blocks_complex_to_mag_squared_1, 0), (self.single
self.connect((self.single_pole_iir_filter_xx_0, 0), (self.blocks_kee
self.connect((self.blocks_keep_one_in_n_4, 0), (self.blocks_multiply
self.connect((self.blocks_keep_one_in_n_3, 0), (self.blocks_file_sin

```

*# QT sink close method reimplementatation*

```

def get_tpint(self):
    return self.tpint

```

```

def set_tpint(self, tpint):

```

```
        self.tpint = tpint
        self.set_integ(self.tpint)

def get_dcg(self):
    return self.dcg

def set_dcg(self, dcg):
    self.dcg = dcg
    self.set_dc_gain(int(self.dcg))

def get_rfgain(self):
    return self.rfgain

def set_rfgain(self, rfgain):
    self.rfgain = rfgain

def get_frequency(self):
    return self.frequency

def set_frequency(self, frequency):
    self.frequency = frequency
    self.set_freq(self.frequency)

def get_decln(self):
    return self.decln

def set_decln(self, decln):
    self.decln = decln
```

```
        self.set_iddecln(self.decln)

def get_srate(self):
    return self.srate

def set_srate(self, srate):
    self.srate = srate
    self.set_israte(self.srate)

def get_clock(self):
    return self.clock

def set_clock(self, clock):
    self.clock = clock
    self.set_variable_static_text_0_0_0_0(self.clock)

def get_fftsize(self):
    return self.fftsize

def set_fftsize(self, fftsize):
    self.fftsize = fftsize
    self.set_fftrate(int(self.samp_rate/self.fftsize))

def get_maxg(self):
    return self.maxg

def set_maxg(self, maxg):
    self.maxg = maxg
```

```
def get_subdev(self):
    return self.subdev

def set_subdev(self, subdev):
    self.subdev = subdev
    self.set_variable_static_text_0_0(self.subdev)

def get_spa(self):
    return self.spa

def set_spa(self, spa):
    self.spa = spa
    self.set_spavg(int(self.spa))

def get_rxant(self):
    return self.rxant

def set_rxant(self, rxant):
    self.rxant = rxant

def get_devid(self):
    return self.devid

def set_devid(self, devid):
    self.devid = devid
    self.set_variable_static_text_0_0_0(self.devid)
```

```

def get_israte(self):
    return self.israte

def set_israte(self, israte):
    self.israte = israte
    self.set_samp_rate(int(self.israte))
    self.set_variable_static_text_0(self.israte)
    self._israte_chooser.set_value(self.israte)
    self.wxgui_fftsink2_0.set_sample_rate(self.israte)

def get_samp_rate(self):
    return self.samp_rate

def set_samp_rate(self, samp_rate):
    self.samp_rate = samp_rate
    self.set_fftrate(int(self.samp_rate/self.fftsize))
    self.blocks_keep_one_in_n_4.set_n(self.samp_rate/self.det_rate)
    self.uhd_usrp_source_0.set_samp_rate(self.samp_rate)
    self.single_pole_iir_filter_xx_0.set_taps(1.0/((self.samp_rate*self.
    self.logpwrfft_x_0.set_sample_rate(self.samp_rate)

def get_prefix(self):
    return self.prefix

def set_prefix(self, prefix):
    self.prefix = prefix
    self.set_recfile_tpr(self.prefix + datetime.now().strftime("%Y.%m.%d
    self.set_recfile_kelvin(self.prefix+"kelvin" + datetime.now().strfti

```

```

        self.blocks_file_sink_1.open(self.prefix+"iq_raw" + datetime.now().s

def get_variable_static_text_0_0_0_0(self):
    return self.variable_static_text_0_0_0_0

def set_variable_static_text_0_0_0_0(self, variable_static_text_0_0_0_0):
    self.variable_static_text_0_0_0_0 = variable_static_text_0_0_0_0
    self._variable_static_text_0_0_0_0_static_text.set_value(self.variab

def get_variable_static_text_0_0_0(self):
    return self.variable_static_text_0_0_0

def set_variable_static_text_0_0_0(self, variable_static_text_0_0_0):
    self.variable_static_text_0_0_0 = variable_static_text_0_0_0
    self._variable_static_text_0_0_0_static_text.set_value(self.variable

def get_variable_static_text_0_0(self):
    return self.variable_static_text_0_0

def set_variable_static_text_0_0(self, variable_static_text_0_0):
    self.variable_static_text_0_0 = variable_static_text_0_0
    self._variable_static_text_0_0_static_text.set_value(self.variable_s

def get_variable_static_text_0(self):
    return self.variable_static_text_0

def set_variable_static_text_0(self, variable_static_text_0):
    self.variable_static_text_0 = variable_static_text_0

```



```

        self._variable_static_text_0_static_text.set_value(self.variable_sta

def get_spec_data_fifo(self):
    return self.spec_data_fifo

def set_spec_data_fifo(self, spec_data_fifo):
    self.spec_data_fifo = spec_data_fifo
    self.blocks_file_sink_5.open(self.spec_data_fifo)

def get_spavg(self):
    return self.spavg

def set_spavg(self, spavg):
    self.spavg = spavg
    self._spavg_slider.set_value(self.spavg)
    self._spavg_text_box.set_value(self.spavg)
    self.logpwrfft_x_0.set_avg_alpha(1.0/float(self.spavg*self.fftrate))

def get_scope_rate(self):
    return self.scope_rate

def set_scope_rate(self, scope_rate):
    self.scope_rate = scope_rate

def get_recfile_tpr(self):
    return self.recfile_tpr

def set_recfile_tpr(self, recfile_tpr):

```

```

self.recfile_tpr = recfile_tpr
self.blocks_file_sink_4.open(self.recfile_tpr)

def get_recfile_kelvin(self):
    return self.recfile_kelvin

def set_recfile_kelvin(self, recfile_kelvin):
    self.recfile_kelvin = recfile_kelvin
    self.blocks_file_sink_0.open(self.recfile_kelvin)

def get_rec_button_tpr(self):
    return self.rec_button_tpr

def set_rec_button_tpr(self, rec_button_tpr):
    self.rec_button_tpr = rec_button_tpr
    self._rec_button_tpr_chooser.set_value(self.rec_button_tpr)
    self.blks2_valve_0.set_open(bool(self.rec_button_tpr))

def get_rec_button_iq(self):
    return self.rec_button_iq

def set_rec_button_iq(self, rec_button_iq):
    self.rec_button_iq = rec_button_iq
    self.blks2_valve_2.set_open(bool(self.rec_button_iq))
    self._rec_button_iq_chooser.set_value(self.rec_button_iq)

def get_noise_amplitude(self):
    return self.noise_amplitude

```

```

def set_noise_amplitude(self, noise_amplitude):
    self.noise_amplitude = noise_amplitude
    self._noise_amplitude_slider.set_value(self.noise_amplitude)
    self._noise_amplitude_text_box.set_value(self.noise_amplitude)

def get_integ(self):
    return self.integ

def set_integ(self, integ):
    self.integ = integ
    self._integ_slider.set_value(self.integ)
    self._integ_text_box.set_value(self.integ)
    self.single_pole_iir_filter_xx_0.set_taps(1.0/((self.samp_rate*self.

def get_idectl(self):
    return self.idectl

def set_idectl(self, idectl):
    self.idectl = idectl
    self._idectl_text_box.set_value(self.idectl)

def get_gain(self):
    return self.gain

def set_gain(self, gain):
    self.gain = gain
    self.uhd_usrp_source_0.set_gain(self.gain, 0)

```

```

        self._gain_slider.set_value(self.gain)
        self._gain_text_box.set_value(self.gain)

def get_freq(self):
    return self.freq

def set_freq(self, freq):
    self.freq = freq
    self._freq_text_box.set_value(self.freq)
    self.wxgui_fftsink2_0.set_baseband_freq(self.freq)
    self.uhd_usrp_source_0.set_center_freq(self.freq, 0)

def get_file_rate(self):
    return self.file_rate

def set_file_rate(self, file_rate):
    self.file_rate = file_rate
    self.blocks_keep_one_in_n_1.set_n(int(self.det_rate/self.file_rate))

def get_fftrate(self):
    return self.fftrate

def set_fftrate(self, fftrate):
    self.fftrate = fftrate
    self.logpwrfft_x_0.set_avg_alpha(1.0/float(self.spavg*self.fftrate))
    self.blocks_keep_one_in_n_3.set_n(self.fftrate)

def get_det_rate(self):

```

```

    return self.det_rate

def set_det_rate(self, det_rate):
    self.det_rate = det_rate
    self.blocks_keep_one_in_n_4.set_n(self.samp_rate/self.det_rate)
    self.blocks_keep_one_in_n_1.set_n(int(self.det_rate/self.file_rate))

def get_dc_gain(self):
    return self.dc_gain

def set_dc_gain(self, dc_gain):
    self.dc_gain = dc_gain
    self._dc_gain_chooser.set_value(self.dc_gain)
    self.blocks_multiply_const_vxx_0.set_k((self.dc_gain, ))

def get_calib_2(self):
    return self.calib_2

def set_calib_2(self, calib_2):
    self.calib_2 = calib_2
    self._calib_2_text_box.set_value(self.calib_2)
    self.blocks_add_const_vxx_1.set_k((self.calib_2, ))

def get_calib_1(self):
    return self.calib_1

def set_calib_1(self, calib_1):
    self.calib_1 = calib_1

```

```

        self._calib_1_text_box.set_value(self.calib_1)

        self.blocks_multiply_const_vxx_1.set_k((self.calib_1, ))

def get_add_noise(self):
    return self.add_noise

def set_add_noise(self, add_noise):
    self.add_noise = add_noise

    self._add_noise_chooser.set_value(self.add_noise)

if __name__ == '__main__':
    import ctypes
    import sys

    if sys.platform.startswith('linux'):
        try:
            x11 = ctypes.cdll.LoadLibrary('libX11.so')
            x11.XInitThreads()

        except:
            print "Warning: failed to XInitThreads()"

    parser = OptionParser(option_class=eng_option, usage="%prog: [options]")
    parser.add_option("", "--tpint", dest="tpint", type="eng_float", default=eng_option(
        help="Set Integration Time [default=%default]")
    parser.add_option("", "--dcg", dest="dcg", type="eng_float", default=eng_option(
        help="Set DC (post-detector) gain [default=%default]")
    parser.add_option("", "--rfgain", dest="rfgain", type="eng_float", default=eng_option(
        help="Set Gain of RF Front-End [default=%default]")
    parser.add_option("", "--frequency", dest="frequency", type="eng_float", default=eng_option(
        help="Set Center Frequency [default=%default]")

```

```

parser.add_option("", "--decln", dest="decln", type="eng_float", default=
    help="Set Declination [default=%default]")
parser.add_option("", "--srate", dest="srate", type="eng_float", default=
    help="Set Sample Rate [default=%default]")
parser.add_option("", "--clock", dest="clock", type="eng_float", default=
    help="Set Clock rate [default=%default]")
parser.add_option("", "--fftsize", dest="fftsize", type="intx", default=
    help="Set fftsize [default=%default]")
parser.add_option("", "--maxg", dest="maxg", type="intx", default=50,
    help="Set maxg [default=%default]")
parser.add_option("", "--subdev", dest="subdev", type="string", default=
    help="Set USRP Subdevice ID [default=%default]")
parser.add_option("", "--spa", dest="spa", type="eng_float", default=eng
    help="Set Spectral Averaging Constant [default=%default]")
parser.add_option("", "--rxant", dest="rxant", type="string", default=""
    help="Set RX Antenna selection [default=%default]")
parser.add_option("", "--devid", dest="devid", type="string", default="a
    help="Set USRP Device ID [default=%default]")
(options, args) = parser.parse_args()
tb = N200_TPR(tpint=options.tpint, dcg=options.dcg, rfgain=options.rfgai
tb.Start(True)
tb.Wait()

```

## Matlab code for reading and displaying data from GNURadio

---

### GNURadio Parsing Code

```
%Radiometer Parsing script
%Matthew E. Nelson
%Updated 6/8/2014
%Rev. 2.15
%-----
%Revision History
%1.7 - Added CSV input file format. Gave up on reading LVM
%1.8 - Added User input box
%1.9 - Added Calibration points for square law detector
%1.91 - Cleaned up some code
%1.92 - Futher clean up of unused code
%1.93 - Fixed dialog boxes not showing the entire title
%2.0 - Added filter to clean up noisy x^2 data
%2.1 - Added NEdeltaT (NEAT) calculation, minor change to plot labels
%2.11 - Added square law voltage to dBm conversion
%2.12 - Fixed bug on when doing NEAT calc, added a time base calculation
%for plots
%2.13 - Added calibration line plots
%2.14 - changed graphs to a time base
%2.15 - Added plotting of both x^2 and N200 on same graph for comparasion

%This script uses the read_float_binary.m file to read in a file written by
%GNURadio. This data can then be manipulated by Matlab and graphed.
This
```



*%script can also accept calibration coefficients in order to calculate the  
%calibrated noise temperature. This requires that two data points are  
%recorded to known sources such as LN2.*

*%Data files using the GNURadio flow diagram written by Matthew Nelson use a  
%valve block to turn "on and off" recording. However, data is still  
%written to the file, but they will be all zeros. This script has a simple  
%routine to remove all zeros. If this is not desired (for example turning  
%on and off the recording) please comment it out.*

*%In April I switched from a UBW32 board to a NI USB DAQ to obtain the  
%square law data. This changed the output file from a csv file to NI's  
%TDMS binary format. The original CSV code will remain but will be  
%commented out.*

*%In theory, this script may also run on Octave, but the file I/O package  
%will be needed to use the file dialog box.*

*%-----*

*%Clear the workspace*

*clear all;*

*%-----*

*%Constants*

*%set's the window size to filter the square-law data*

*windowSize = 200;*

*%Receiver Noise Temperature for NEAT calc*

*Trec = 400;*

*%Integration Time for NEAT calc*

*tau = 2;*

*%Bandwidth for NEAT calc*

beta = 10e6;

*%-----*

*%User Dialog entry*

*%The User input box will accept the calibration points from the user and  
%will output the calibration data.*

*%Setup dialog options*

options.Resize='on';

options.WindowStyle='normal';

options.Interpreter='tex';

*%Setup MsgBox options*

CreateStruct.Interpreter = 'tex';

CreateStruct.WindowStyle = 'modal';

*%-----*

*%Ask for user input for calibration*

prompt = {'Enter calibration temp 1 (K)', 'Enter cali

dlg\_title = 'Calibration for N200';

num\_lines = 1;

def = {'371', '77', '.170', '.103'};

N200answer = inputdlg(prompt,dlg\_title,num\_lines,def,options);

prompt = {'Enter calibration temp 1 (K):', 'Enter cal

dlg\_title = 'Calibration for X^2';

num\_lines = 1;

def = {'371', '77', '2.1', '1.9'};

```
x2answer = inputdlg(prompt,dlg_title,num_lines,def,options);
```

```
%Calibration variables based on two temperature points
```

```
N200temp1 = N200answer(1);
```

```
N200temp2 = N200answer(2);
```

```
%Enter the measured data points for temp1 and temp2
```

```
N200data1 = N200answer(3);
```

```
N200data2 = N200answer(4);
```

```
%Calibration variables based on two temperature points
```

```
x2temp1 = x2answer(1);
```

```
x2temp2 = x2answer(2);
```

```
%Enter the measured data points for temp1 and temp2
```

```
x2data1 = x2answer(3);
```

```
x2data2 = x2answer(4);
```

```
%Store the values into a and b
```

```
syms a b;
```

```
%Solve our two calibration points for the SDR
```

```
y = solve(N200data1*a+b==N200temp1,N200data2*a+b==N200temp2);
```

```
N200calib1 = double(y.a);
```

```
N200calib2 = double(y.b);
```

```
msgbox(sprintf('The calibrations points for the N200 is: %f and %f',N200cali
```

```
N200calibration = [y.a y.b];
```

```
fprintf('N200 Coefficient 1: %.2f N200 Coefficent 2: %.2f \r\n',N200calib1,
```

```
%Store the values into a and b
```

```
syms a b;
```

```
%Solve our two calibration points for the X^2
```

```
y = solve(x2data1*a+b==x2temp1,x2data2*a+b==x2temp2);
```

```
x2calib1 = double(y.a);
```

```
x2calib2 = double(y.b);
```

```
msgbox(sprintf('The calibrations points for the X^2 is: %f and %f',x2calib1,
```

```
x2calibration = [y.a y.b];
```

```
fprintf('X^2 Coefficient 1: %.2f X^2 Coefficent 2: %.2f \r\n',x2calib1, x2ca
```

```
%-----
```

```
%Read data files.
```

```
%GNURadio outputs a binary file and LabView outputs a TDMS file
```

```
%Ask for the filename that has the TPR data from GNURadio
```

```
gnuradio_file = uigetfile('*.tpr','Select the GNURadio data file');
```

```
disp('Importing Radiometer data...')
```

```

%Ask for the filename of the Square law detector. Comment out if not using
square_law = uigetfile('*.tdms','Select the Square_law data file');
disp('Importing Square Law data...')

%Call the program that will convert the TDMS file format to a .mat file

tdms = convertTDMS2(true,square_law);

%The data created is nested in the array, we need to pull the data we want
x2=tdms.Data.MeasuredData(1,4).Data;

%Call the read_float_binary script. This scripts reads the GNURadio
%binary protocol
gnuradio = read_float_binary(gnuradio_file);

%-----
%Remove zeros which is common in files that use the valve feature to
%control flow
gnuradio = gnuradio(gnuradio~=0);

%Create a time index
timen200=(1:length(gnuradio))*0.5;
timex2=(1:length(x2))./100;

%-----
%Calculate the calibrated noise temperature for the SDR
N200calib_data = ((gnuradio*N200calibration(1))+N200calibration(2));

```

```

%Calculate the calibrated noise temperature for the  $X^2$ 
x2calib_data = ((x2*x2calibration(1))+x2calibration(2));

%-----
%The square-law data is fairly noisy, so we will filter it to smooth
%it out.
%First, convert from a sym matrix to a double
temp1=double(x2calib_data);
temp2=double(x2);
%Now filter it
avgx2_calib=filter(ones(1,windowSize)/windowSize,1,temp1);
avgx2=filter(ones(1,windowSize)/windowSize,1,temp2);
%-----
%Convert voltage from square-law to dBm. 53 mV is 1 dBm
dbmx2=x2./0.053;
avgdbmx2=avgx2./0.053;

%Calculate NEAT (NEAT)
%First calculation is the NEAT expected based on BW and other parameters
%NEAT = (Ta+Tsys)/SQRT(tau+beta)

NEAT = (Trec)./sqrt(tau+beta);

%Now we can calculate the actual NEAT
%Look at a sample that is stable, in the LN2 area

for n = 1:100;

```

```

    rQ_stdev(n) = gnuradio(n+610);
end

estNEAT = std(rQ_stdev);

%Now print this information out
fprintf('Calculated NEAT: %.2f Actual NEAT: %.2f \r\n',NEAT, estNEAT);
%-----

%Plot the calibrated data
figure;
subplot(2,1,1);
plot(N200calib_data);
title('N200 TPR Calibrated Data');

% Create xlabel
xlabel('Time');

% Create ylabel
ylabel('Calibrated Noise Temperature in K');
subplot(2,1,2);
plot(avgx2_calib);
title('x^2 Calibrated Data');
figure
timeshift = timex2+75;
plot(timen200,N200calib_data,'r');
hold on;
plot(timeshift,avgx2_calib,'g');
title('X^2 and N200 calibrated data');

```

```

ylabel('Noise Temp K');
xlabel('Time sec');
legend('N200','X^2');
%-----
%Plot the raw data
figure;
subplot(2,1,1);
plot(timen200,gnuradio);
title('N200 TPR Raw Data');
xlabel('Time Sec');
ylabel('rQ Value');
subplot(2,1,2);
plot(timex2,avgx2);
title('x^2 Raw Data');
ylabel('Raw Voltage');
xlabel('Time Sec');
axis([-inf inf 2.1 2.4]);

%-----
%Plot the calibration line
figure;
x=linspace(str2double(N200data2),str2double(N200data1),200);
y=linspace(str2double(x2data2),str2double(x2data1),200);
subplot(2,1,1);
plot(x, N200calib1*x+N200calib2,'-r');
title('Calibration line for N200 SDR');
xlabel('raw value');
ylabel('Noise Temperature K');

```



```

subplot(2,1,2);
plot(y,x2calib1*y+x2calib2,'-b');
title('Calibration line for X^2 detector');
xlabel('raw value');
ylabel('Noise Temperature K');
%-----
%plot x2 with dBm
figure
plot(timex2,avgdbmx2);
title('x^2 power readings');
ylabel('dBm');
xlabel('Time Sec');
axis([-inf inf 37 40]);

```

## **APPENDIX B. EE 518 Test Results**

### **E E 518 Lab Tests**

Further testing of the square-law detector was performed by using the radiometer in a real world event. This test was exercised in conjunction with the Microwave Remote Sensing class (E E 518) under Dr. Brian Hornbuckle. In the Spring of 2012 the radiometer was moved to the roof of agronomy and the EE 518 students conducted a number of tests using the N200 software defined radio to collect the data.

The E E 518 test however showed that there were additional problems with the radiometer. While the test showed that the SDR could in fact read data, the data was skewed. It was later found out that the radiometer was generating an interfering signal that caused the power readings to be elevated. That was found as a result of having the SDR record the signal and then was analyzed later. Through this analysis, we found that a strong harmonic was developed and caused a spike in signal being recorded. Although the exact reason for this has not been found, the problem has been isolated to something in the RF Front End of the ISU radiometer.

In the Spring of 2014 the E E 518 class ran another experiment, but this time a different one. This experiment mimicked the experiments that I ran to calibrate and test the radiometer. This allowed an outside source to validate the results that I was getting with running the radiometer. Like my tests, the students submerged a matched load into liquid nitrogen and then in boiling water. The liquid nitrogen was assumed to be at 77 K and the boiling water was measured to be at 99 C or 372 K. The students were then given a mystery sample in which they had to determine the temperature of a water sample. Since the students had to points, they could find the calibration line and determine the temperature. The experiment was run twice as we expected the radiometer may have drifted between measurements.

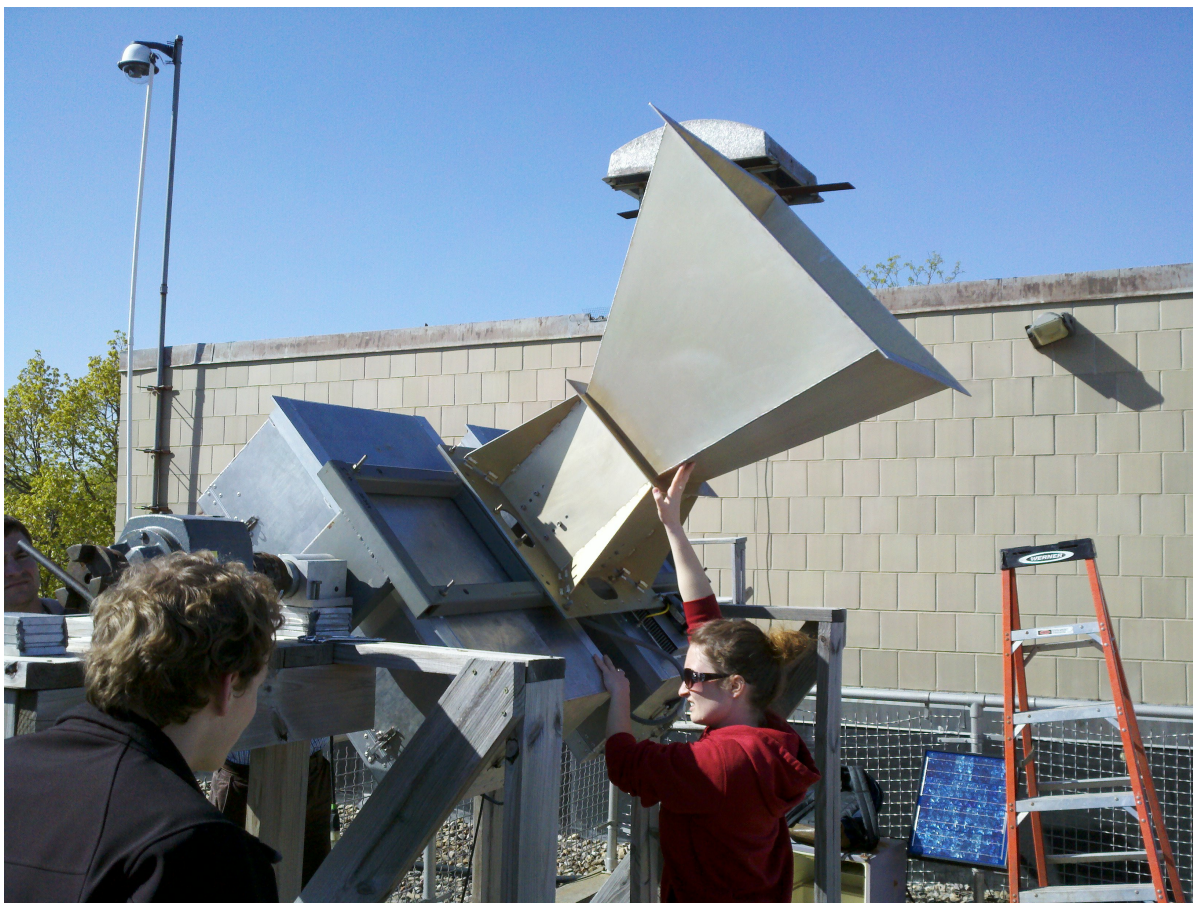


Figure B.1 Students rotating the radiometer for an experiment on Agronomy Hall

#### **B.0.4 Test setup**

For the E E 518 class, the setup was similar to experiments that was run to test the results in this thesis. For the E E 518 however the students only used the N200 SDR for recording the total power readings. The ISU Radiometer was used only to provide the RF front end as in other tests and the output from that RF front end was feed into the N200. A matched load was attached to the input of the RF front end. This matched load was then submersed into either the liquid nitrogen or water baths.

### **B.0.5 Lab Experiment**

Students conducted the experiment by submerging the matched load into Liquid Nitrogen, then boiling water, then an unknown sample. The LN2 was believed to be at 77 K. The boiling water was measured by the students and was recorded to be 99 C. The mystery water was then measured by myself and recorded both before the students placed the match load in there and after to see if it changed temperature between the experiments. During this time the GNURadio program that I wrote recorded the total power information to the hard drive. This file was then given to the tests and an example Matlab script was also provided for them to use to read the data file.

### **B.0.6 Lab Results**

Two labs were conducted, however the data from the first lab was more stable and had better results than the second lab. Therefore the students only used the data set from the first lab experiment.

## APPENDIX C. Direct-Sampling Digital Correlation Radiometer

### Theory of Operation

The original ISU Radiometer was constructed by the University of Michigan and was based on Dr. Mark Fischman's dissertation on a Direct-Sampling Digital Correlation Radiometer [Fischman (2001)]. This type of radiometer amplifies the signal but then immediately digitizes the signal to be processed. In many ways, this is how a software defined radio works, however in this case the ISU radiometer is under-sampled. However, as explained by Dr. Fischman this is acceptable for a total power radiometer since the only information we need is power information. The radiometer that Dr. Fischman proposes also correlates the signals, one from the vertical polarization and the other from the horizontal polarization from the antenna.

#### C.0.7 Implantation in the ISU Radiometer

The original ISU radiometer worked by under-sampling the RF signal coming into the analog to digital converters. This under-sampled signal lacks enough sample to recreate the full signal, however the power information can be extracted. The original ISU radiometer also used both the vertical and the horizontal polarization coming from the antenna. This allowed the radiometer to correlate between the vertical and horizontal polarization.

## BIBLIOGRAPHY

- Behnke, P., Soberal, D., Bredeweg, S., Dunne, B., Sterian, A., and Furton, D. (2013). Senior capstone: A software defined radio design for amateur astronomy. In *Interdisciplinary Engineering Design Education Conference (IEDEC), 2013 3rd*, pages 104–111.
- De Roo, R., Ruf, C., and Sabet, K. (2007). An l-band radio frequency interference (rfi) detection and mitigation testbed for microwave radiometry. In *Geoscience and Remote Sensing Symposium, 2007. IGARSS 2007. IEEE International*, pages 2718–2721.
- Dicke, R. H. (Jul). The measurement of thermal radiation at microwave frequencies. *Review of Scientific Instruments*, 17(7):268–275.
- Ellingson, S., Hampson, G., and Johnson, J. (July). Design of an l-band microwave radiometer with active mitigation of interference. In *Geoscience and Remote Sensing Symposium, 2003. IGARSS '03. Proceedings. 2003 IEEE International*, volume 3, pages 1751–1753.
- Erbas, C., Hornbuckle, B., and De Roo, R. (31 2006-Aug. 4). Iowa state university/the university of michigan direct sampling digital radiometer. In *Geoscience and Remote Sensing Symposium, 2006. IGARSS 2006. IEEE International Conference on*, pages 3074–3077.
- Evans, G. and McLeish, C. W. (1977). *RF Radiometer Handbook*. Artech House, Dedham, MA.
- F. T. Ulaby, R. K. M. and Fung, A. K. (1981). *Microwave Remote Sensing*. Artech House.
- Fischman, M. A. (2001). *Development of a direct-sampling digital correlation radiometer for earth remote sensing applications*. PhD thesis, University of Michigan.

- Forte, G., Tarongi Bauza, J., dePau, V., Vall llossera, M., and Camps, A. (2013). Experimental study on the performance of rfi detection algorithms in microwave radiometry: Toward an optimum combined test. *Geoscience and Remote Sensing, IEEE Transactions on*, 51(10):4936–4944.
- Fujimoto, K. (Mar). On the correlation radiometer technique. *Microwave Theory and Techniques, IEEE Transactions on*, 12(2):203–212.
- Goggins, W. B. (Jan.). A microwave feedback radiometer. *Aerospace and Electronic Systems, IEEE Transactions on*, AES-3(1):83–90.
- Leech, M. (2006). Gnuradio and usrp: Solderless breadboarding for the 21st century. In *25th Anniversary Conference of the Society of Amateur Radio Astronomers*.
- Leech, M. and Ocame, D. (2007). A year of gnu radio and sdr astronomy: experience, practice and observations. Website. [http://www.sbrac.org/documents/gnuradio\\_at\\_one\\_year\\_20070401.doc](http://www.sbrac.org/documents/gnuradio_at_one_year_20070401.doc).
- Liu, P.-W., Judge, J., DeRoo, R., England, A., and Luke, A. (2013). Utilizing complementarity of active/passive microwave observations at l-band for soil moisture studies in sandy soils. In *Geoscience and Remote Sensing Symposium (IGARSS), 2013 IEEE International*, pages 743–746.
- McIntyre, E. and Gasiewski, A. (2012). A new technique for detecting the presence of weak interfering digital signals in radiometric noise. In *Geoscience and Remote Sensing Symposium (IGARSS), 2012 IEEE International*, pages 1517–1520.
- McMullan, K. D., Brown, M., Martin-Neira, M., Rits, W., Ekholm, S., Marti, J., and Lemanczyk, J. (March). Smos: The payload. *Geoscience and Remote Sensing, IEEE Transactions on*, 46(3):594–605.
- Misra, S., De Roo, R., and Ruf, C. (2012). An improved radio frequency interference model: Reevaluation of the kurtosis detection algorithm performance under central-limit conditions. *Geoscience and Remote Sensing, IEEE Transactions on*, 50(11):4565–4574.

- Mitola, J. (May). The software radio architecture. *Communications Magazine, IEEE*, 33(5):26–38.
- Nyquist, H. (1928). Thermal agitation of electric charge in conductors. *Physical review*, 32(1):110–113.
- Rashid, R. A., Sarijari, M. A., Fisal, N., Yusof, S. K. S., and Mahalin, N. H. (2011). Spectrum sensing measurement using gnu radio and usrp software radio platform. In *ICWMC 2011: The Seventh International Conference on Wireless and Mobile Communications*, pages 237–242.
- Sarijari, M., Marwanto, A., Fisal, N., Yusof, S. K. S., Rashid, R., and Satria, M. (Dec.). Energy detection sensing based on gnu radio and usrp: An analysis study. In *Communications (MICC), 2009 IEEE 9th Malaysia International Conference on*, pages 338–342.
- Skou, N. and Vine, D. L. (2006). *Microwave Radiometer Systems Design and Analysis*. Artech House, Norwood, MA.
- Terlep, D. (2002). How quantization and thermal noise determine an adc’s effective noise figure. Website. <http://www.maximintegrated.com/app-notes/index.mvp/id/1197>.
- Tiuri, M. (Dec). Radio astronomy receivers. *Antennas and Propagation, IEEE Transactions on*, 12(7):930–938.
- Wang, Z., Liu, J., Lu, H., Zheng, W., Wang, X., and Li, B. (2012). A digital correlation full-polarimetric microwave radiometer design and calibration. In *Geoscience and Remote Sensing Symposium (IGARSS), 2012 IEEE International*, pages 4688–4690.