

VMF Architecture v2


Document: Architecture v2 (diagram update to VMF-ARC-001) · **Prepared by:** Mathan · **Prepared:** 28 Sep 2026 · **Sign-off target:** Fri 2 Oct 2026 · **Status:** Pending lead sign-off

POSITION STATEMENT

The Virtual Mobile Farm detects crashes, hangs/ANRs, layout defects and performance regressions of an APK across 24 controlled virtual Android profiles. Each profile reproduces the Android version, screen, RAM, CPU tier and known OEM behaviour patterns of a named reference model. It does not reproduce OEM firmware, physical GPU/chipset performance or hardware sensors. Performance results are relative measurements within the virtual environment.

Virtual Mobile Farm — Architecture v2

The Virtual Mobile Farm detects crashes, hangs/ANRs, layout defects and performance regressions of an APK across 24 virtual profiles. Each profile reproduces the screen, RAM, CPU tier and known OEM behaviour patterns of a named reference model. It does not reproduce OEM firmware or physical chipset performance. Performance numbers are emulator-relative.

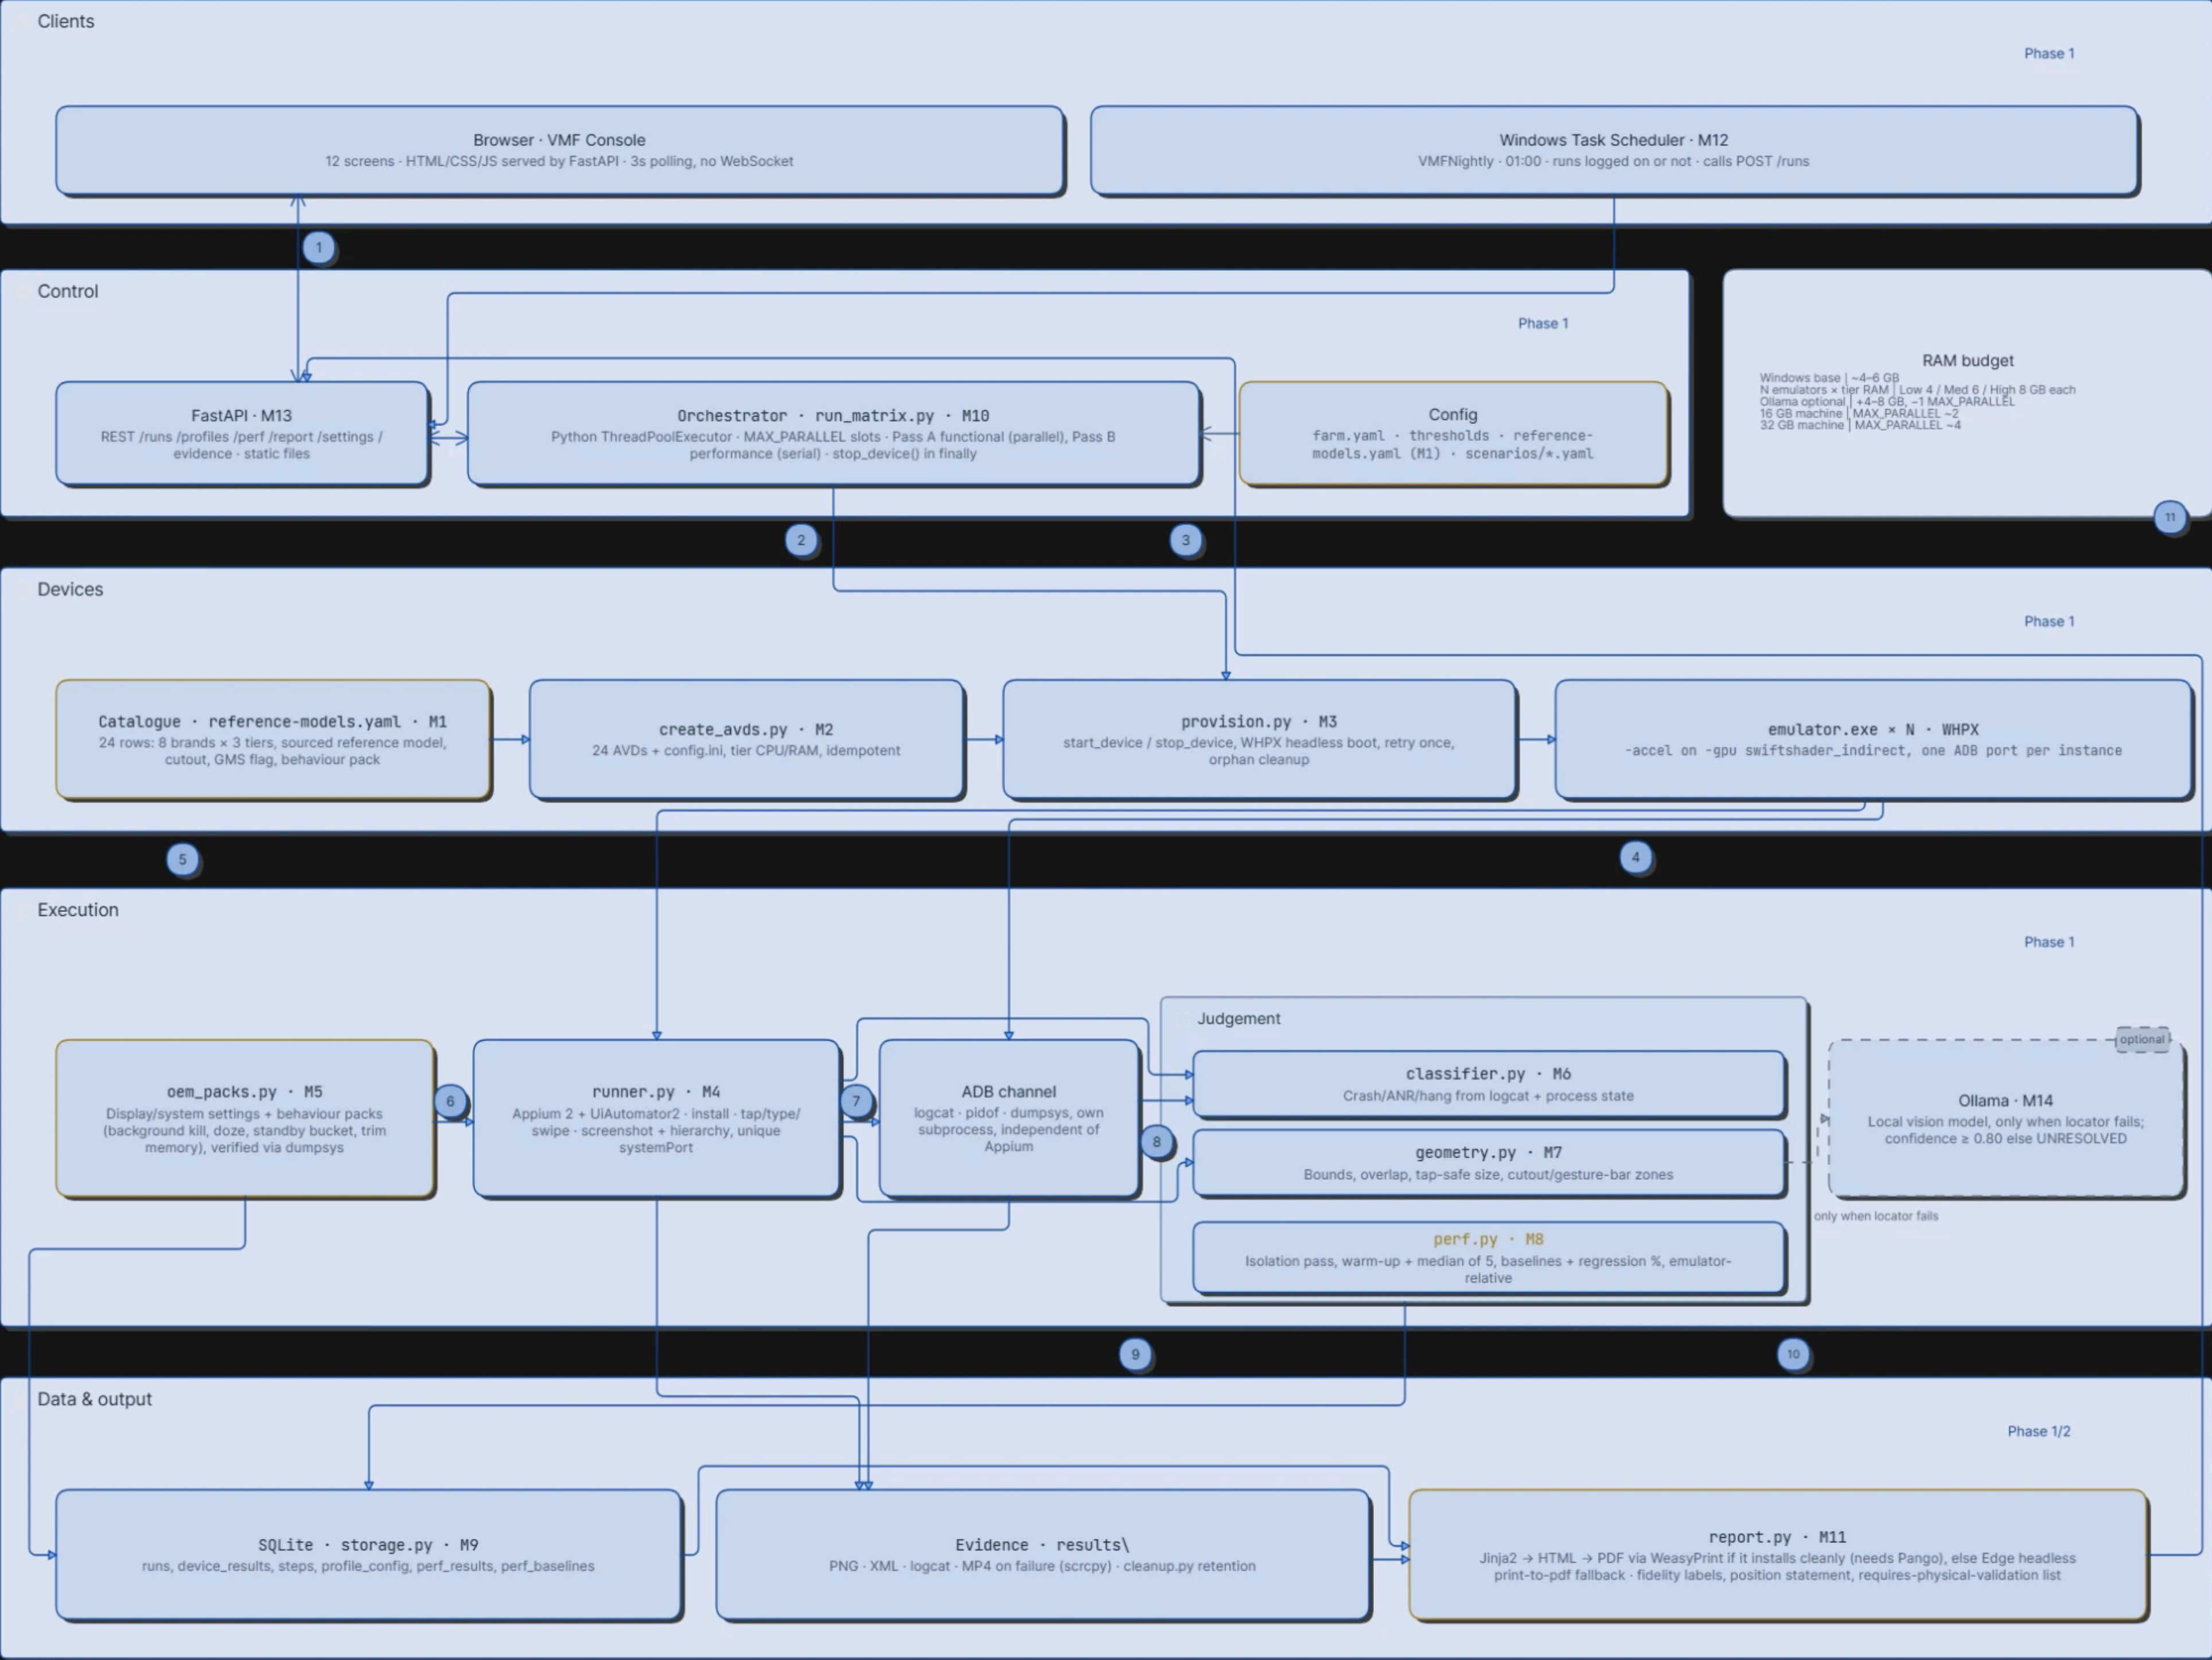

1 start → 2 queue → 3 request device → 4 boot → 5 apply settings → 6 drive scenario → 7 collect signals → 8 judge → 9 persist → 10 report → 11 results back to console. Yellow = fidelity module that answers a drawback. Dashed border = optional. Heavy border = core control path.