

(19) **United States**

(12) **Patent Application Publication**  
Fay et al.

(10) **Pub. No.: US 2021/0041243 A1**

(43) **Pub. Date: Feb. 11, 2021**

(54) **INTERMEDIATE WAYPOINT GENERATOR**

(52) **U.S. Cl.**

CPC ..... **G01C 21/20** (2013.01); **G05D 1/0088** (2013.01)

(71) Applicant: **Boston Dynamics, Inc.**, Waltham, MA (US)

(72) Inventors: **Gina Christine Fay**, Waltham, MA (US); **Alfred Rizzi**, Cambridge, MA (US)

(73) Assignee: **Boston Dynamics, Inc.**, Waltham, MA (US)

(21) Appl. No.: **16/569,885**

(22) Filed: **Sep. 13, 2019**

**Related U.S. Application Data**


(60) Provisional application No. 62/883,438, filed on Aug. 6, 2019.

**Publication Classification**

(51) **Int. Cl.**  
**G01C 21/20** (2006.01)

(57) **ABSTRACT**

A method for generating intermediate waypoints for a navigation system of a robot includes receiving a navigation route. The navigation route includes a series of high-level waypoints that begin at a starting location and end at a destination location and is based on high-level navigation data. The high-level navigation data is representative of locations of static obstacles in an area the robot is to navigate. The method also includes receiving image data of an environment about the robot from an image sensor and generating at least one intermediate waypoint based on the image data. The method also includes adding the at least one intermediate waypoint to the series of high-level waypoints of the navigation route and navigating the robot from the starting location along the series of high-level waypoints and the at least one intermediate waypoint toward the destination location.

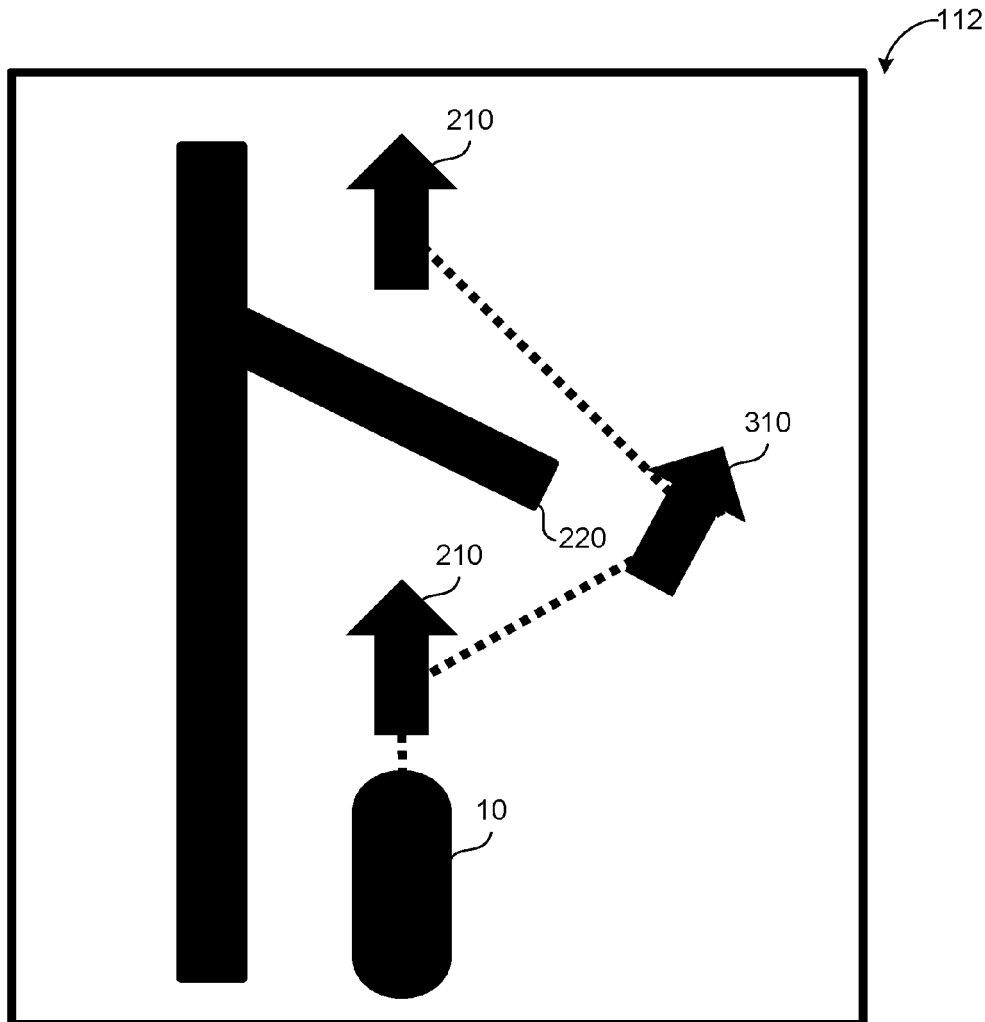

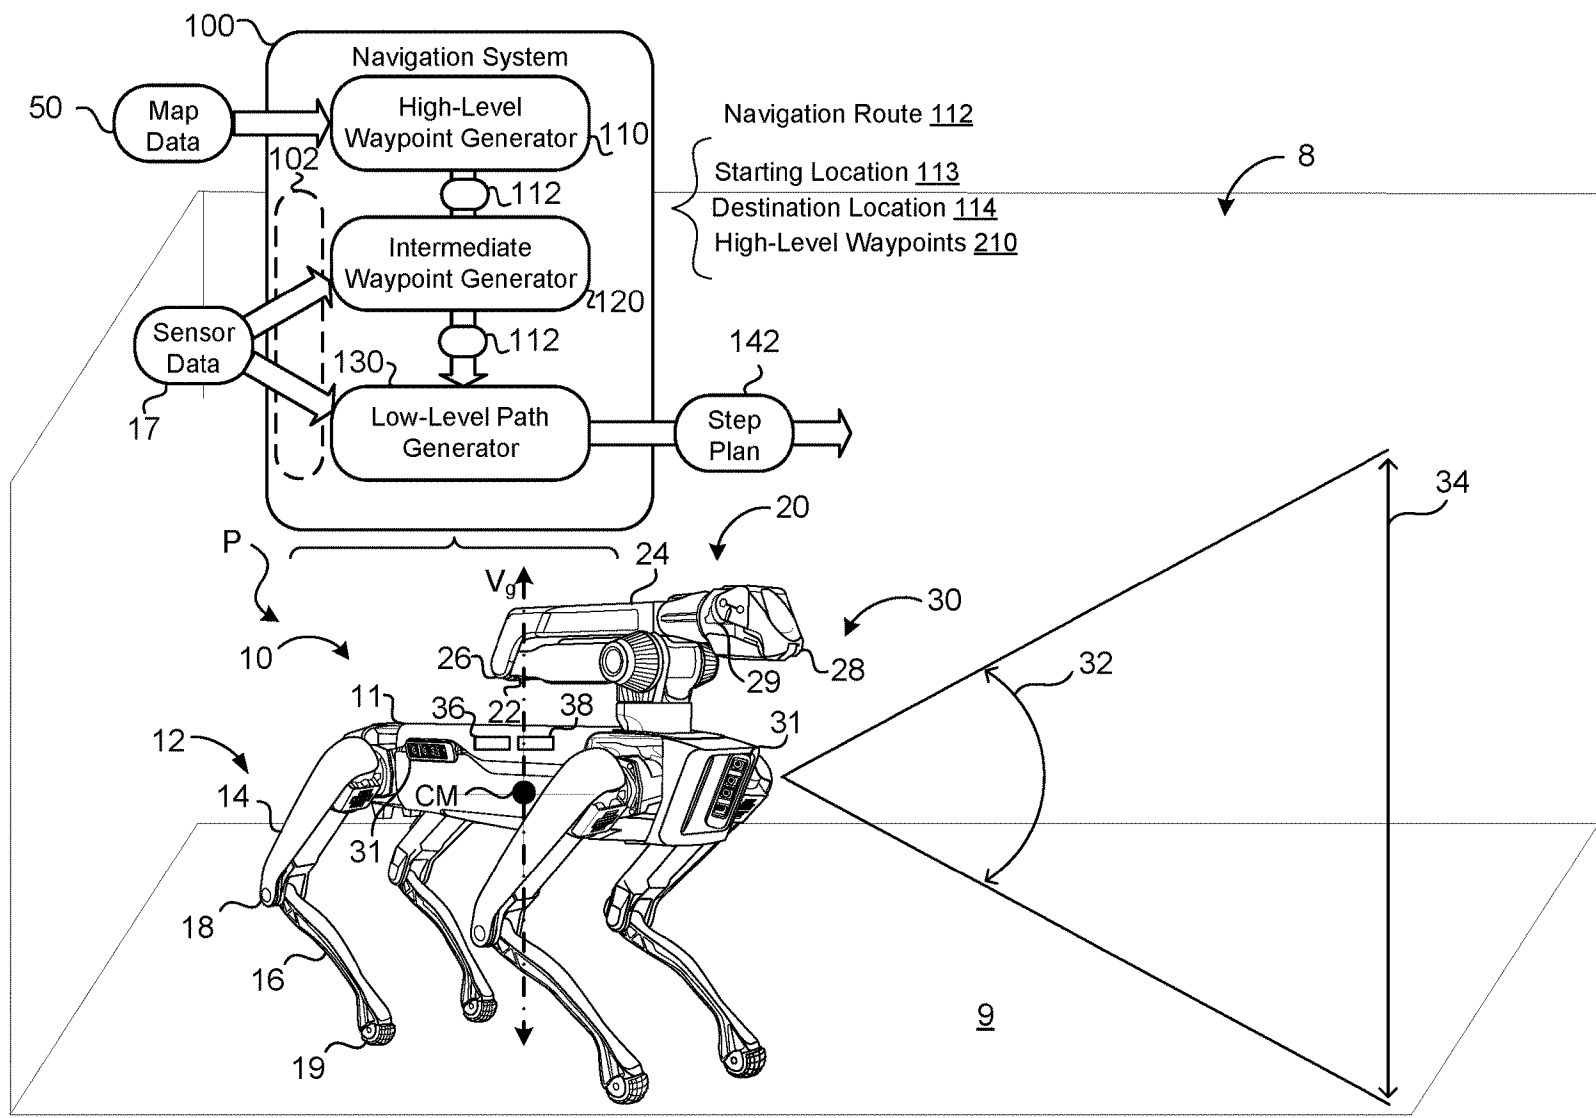


FIG. 1

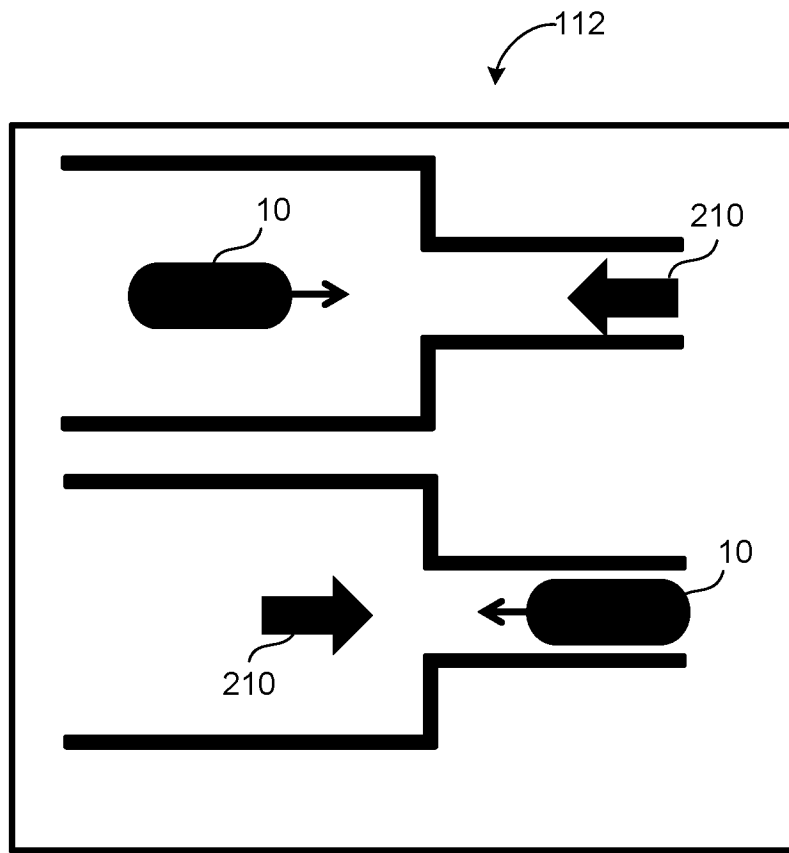


FIG. 2B

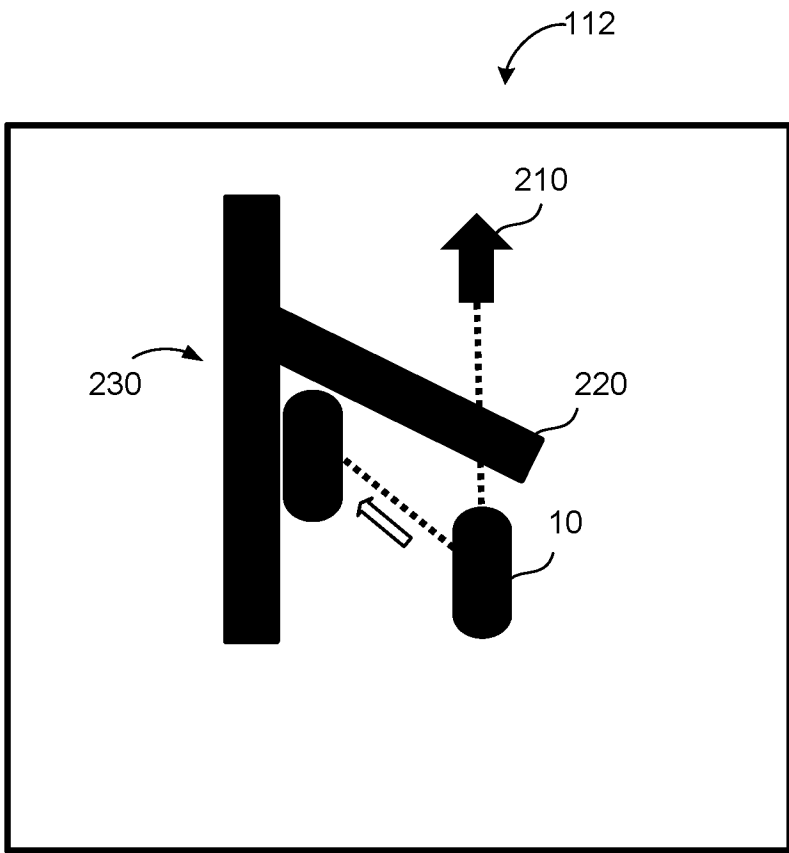


FIG. 2A

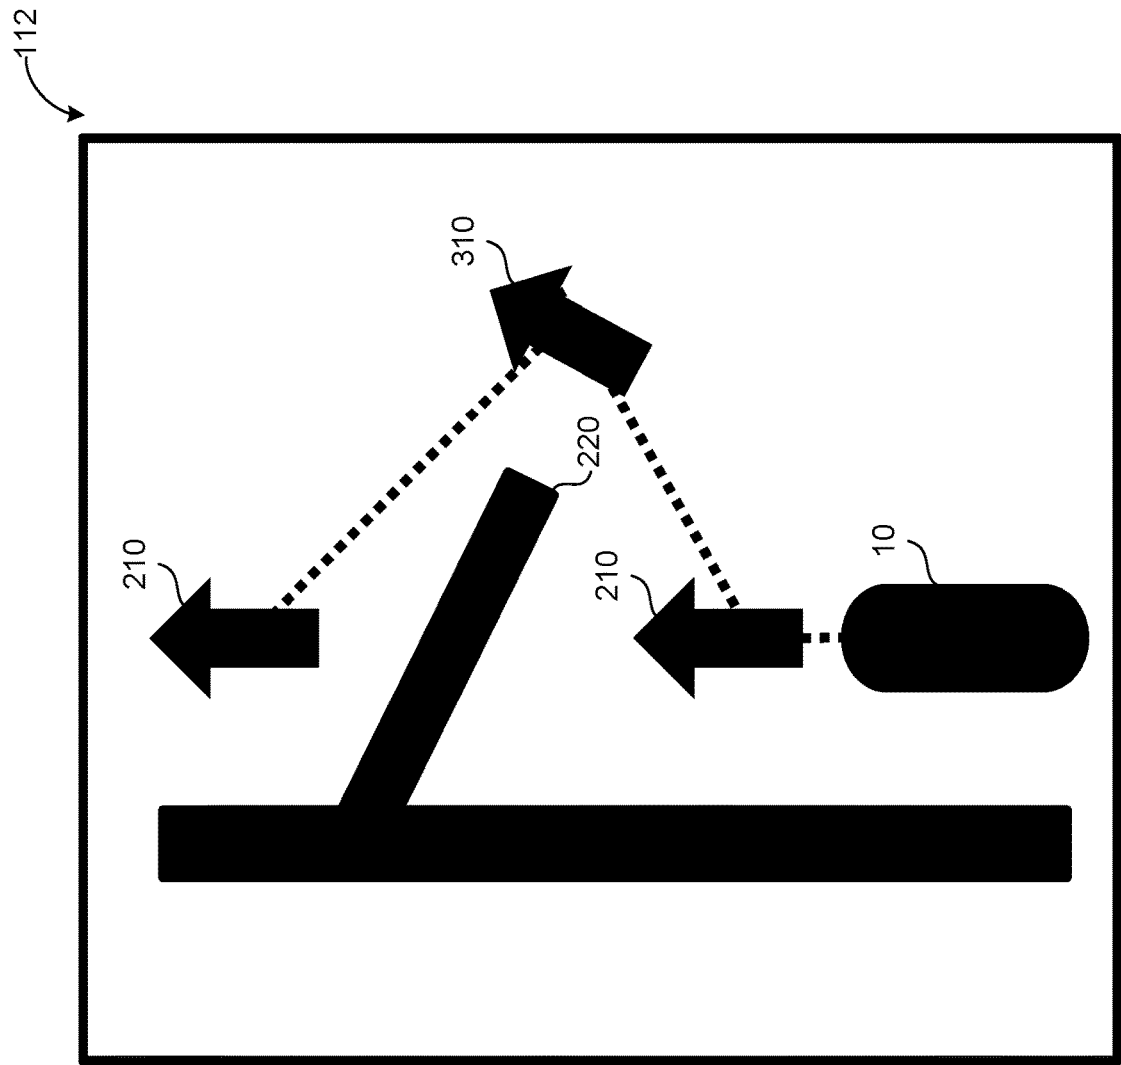


FIG. 3

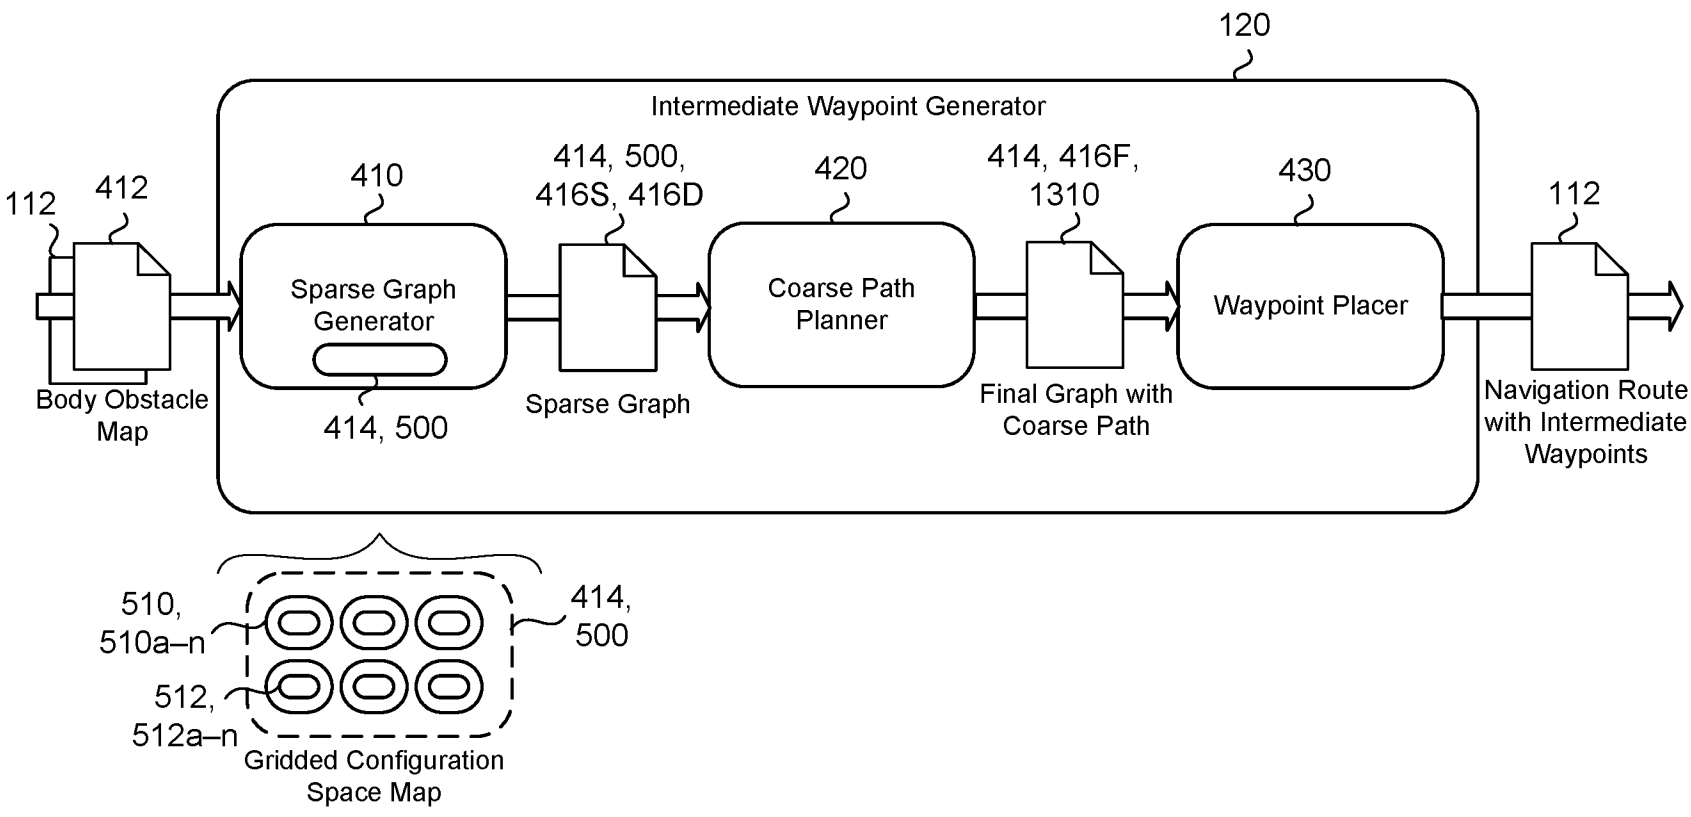


FIG. 4

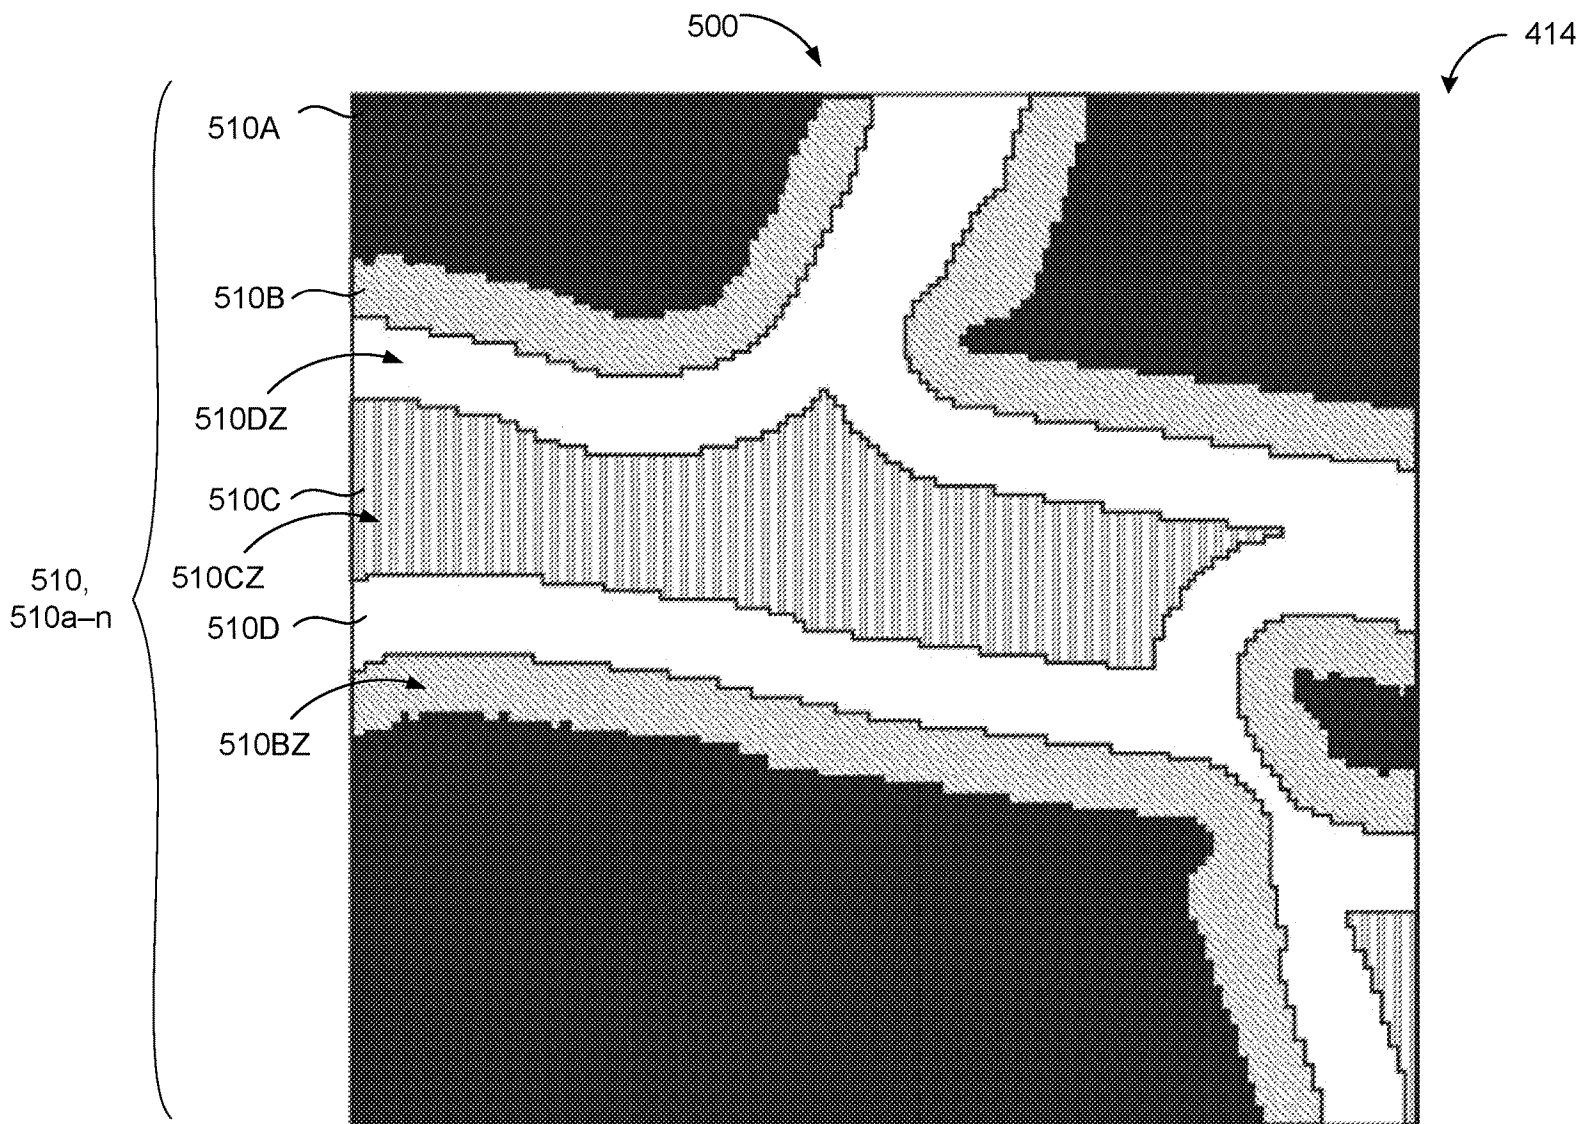
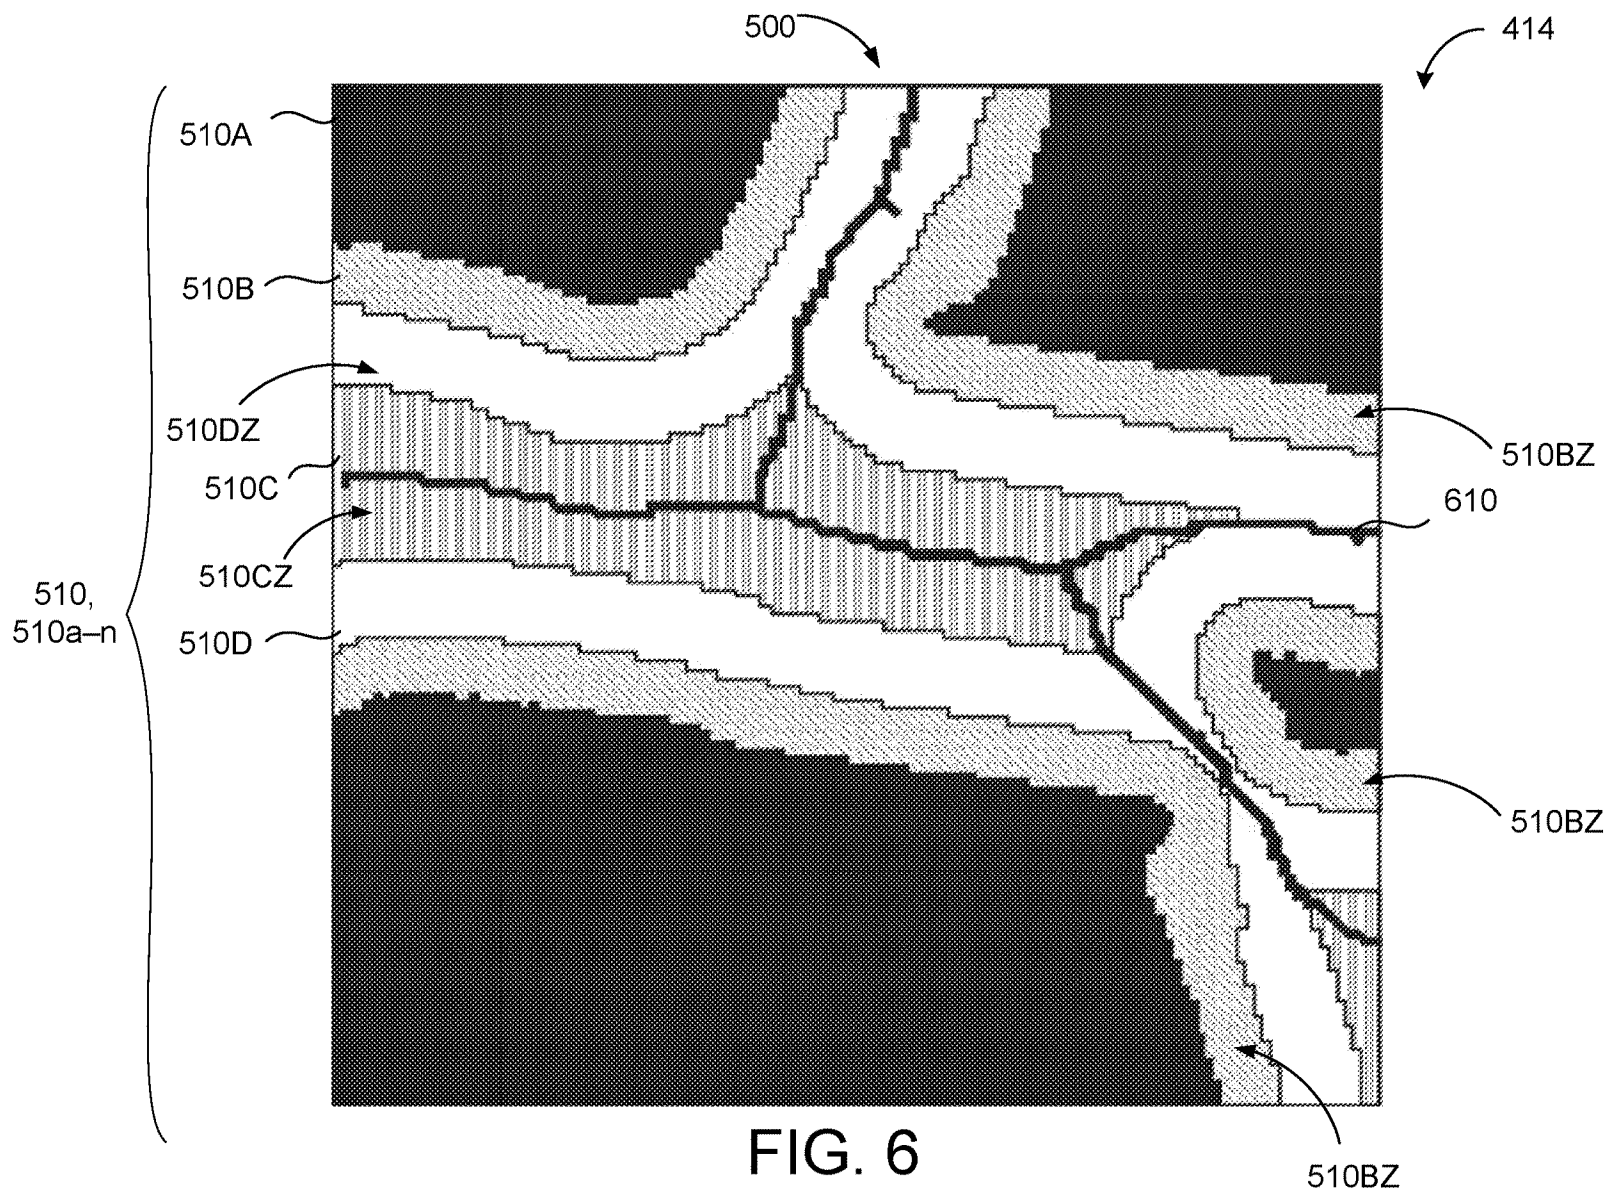


FIG. 5



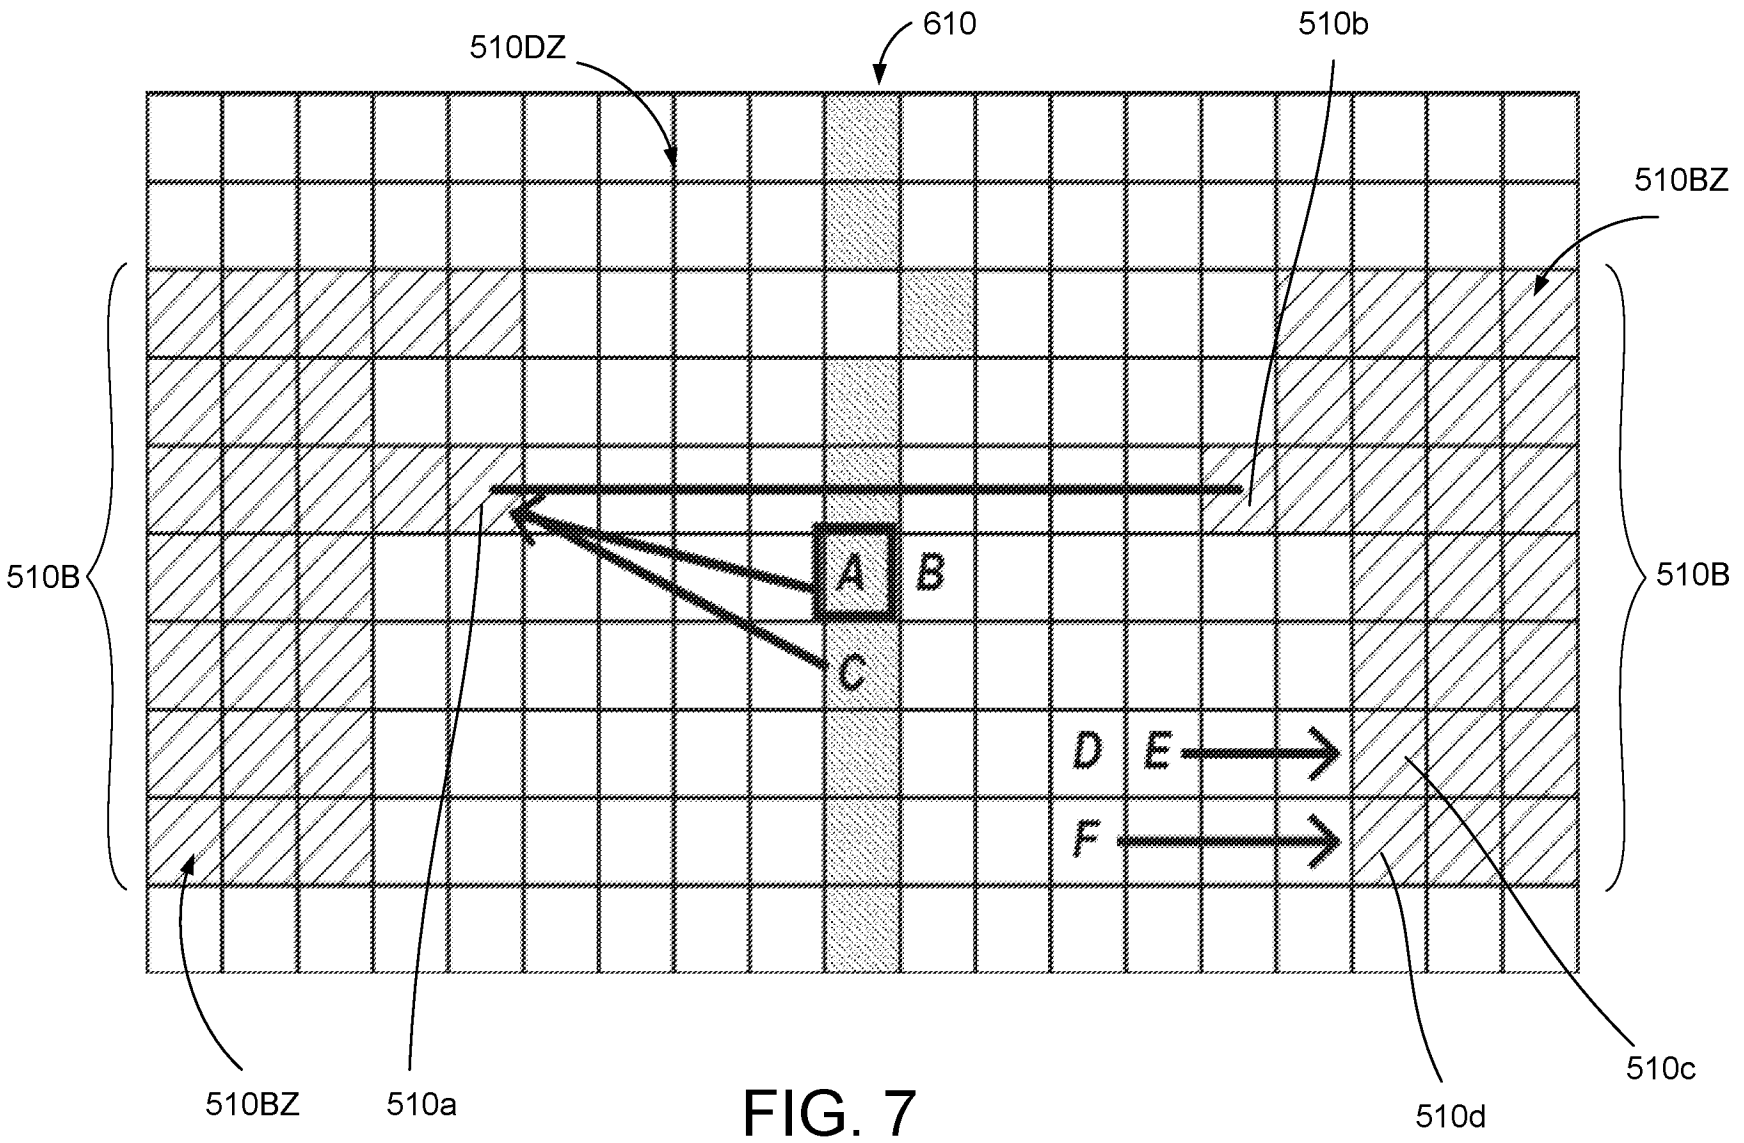


FIG. 7



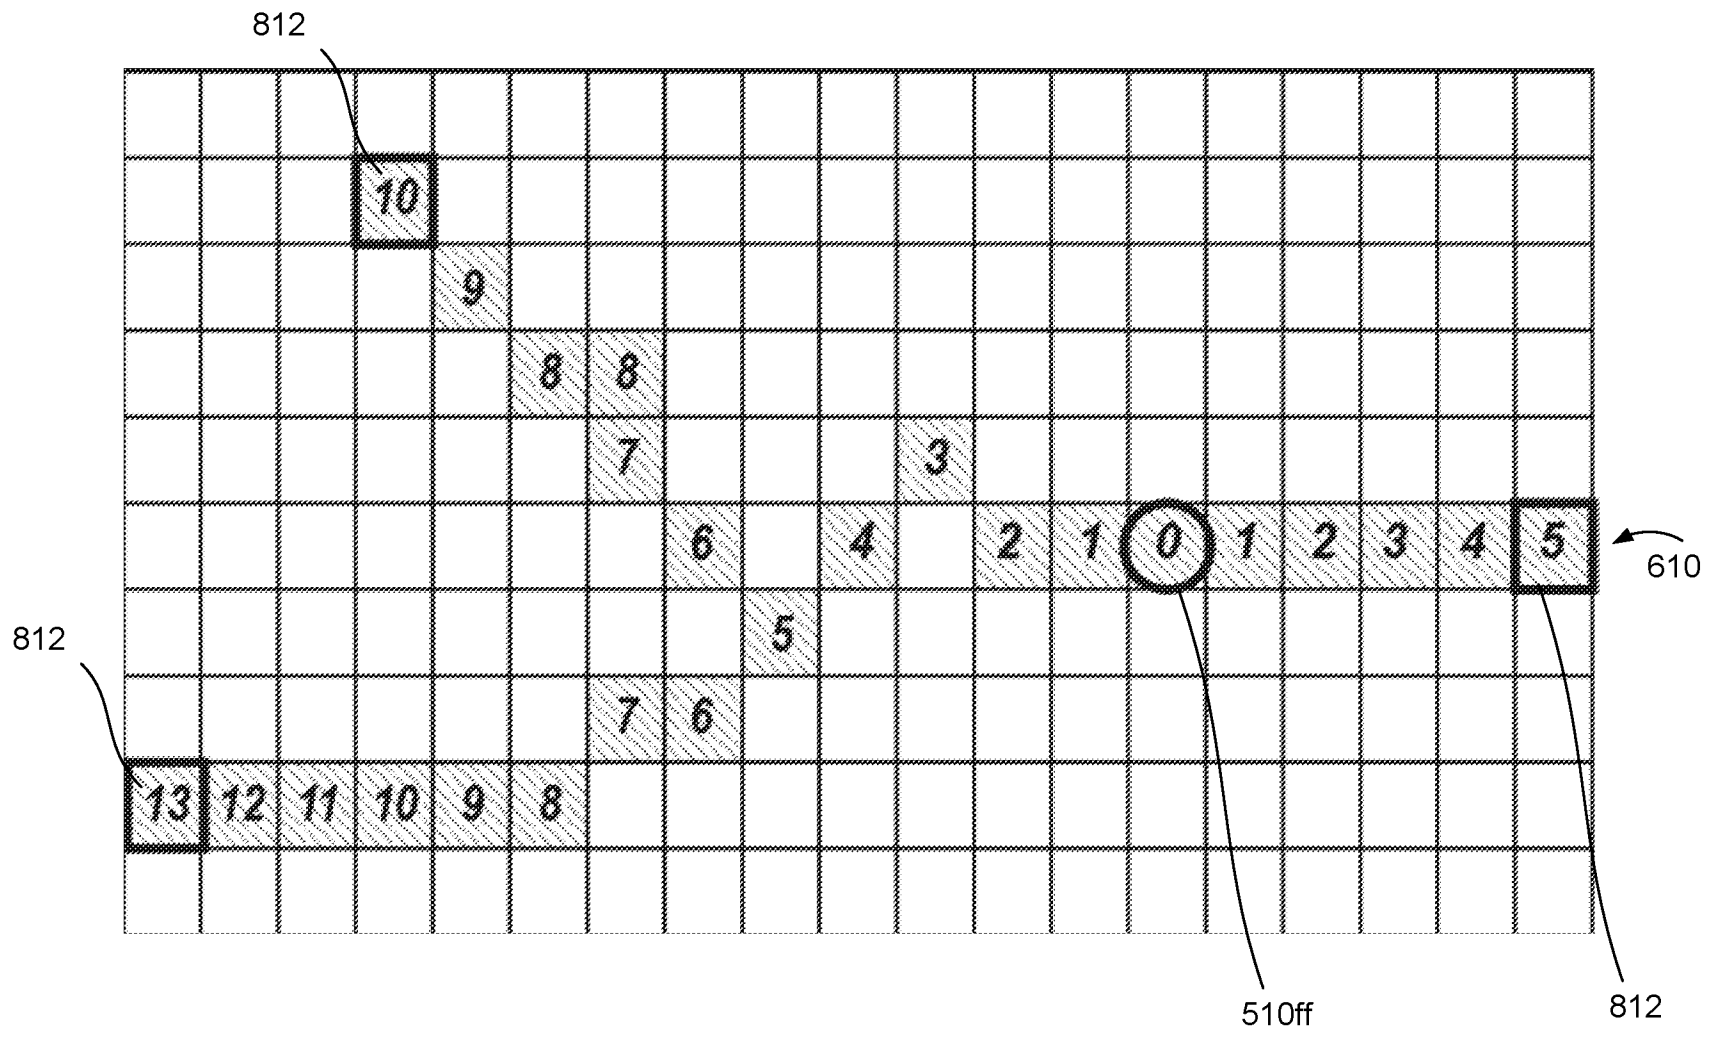


FIG. 8A

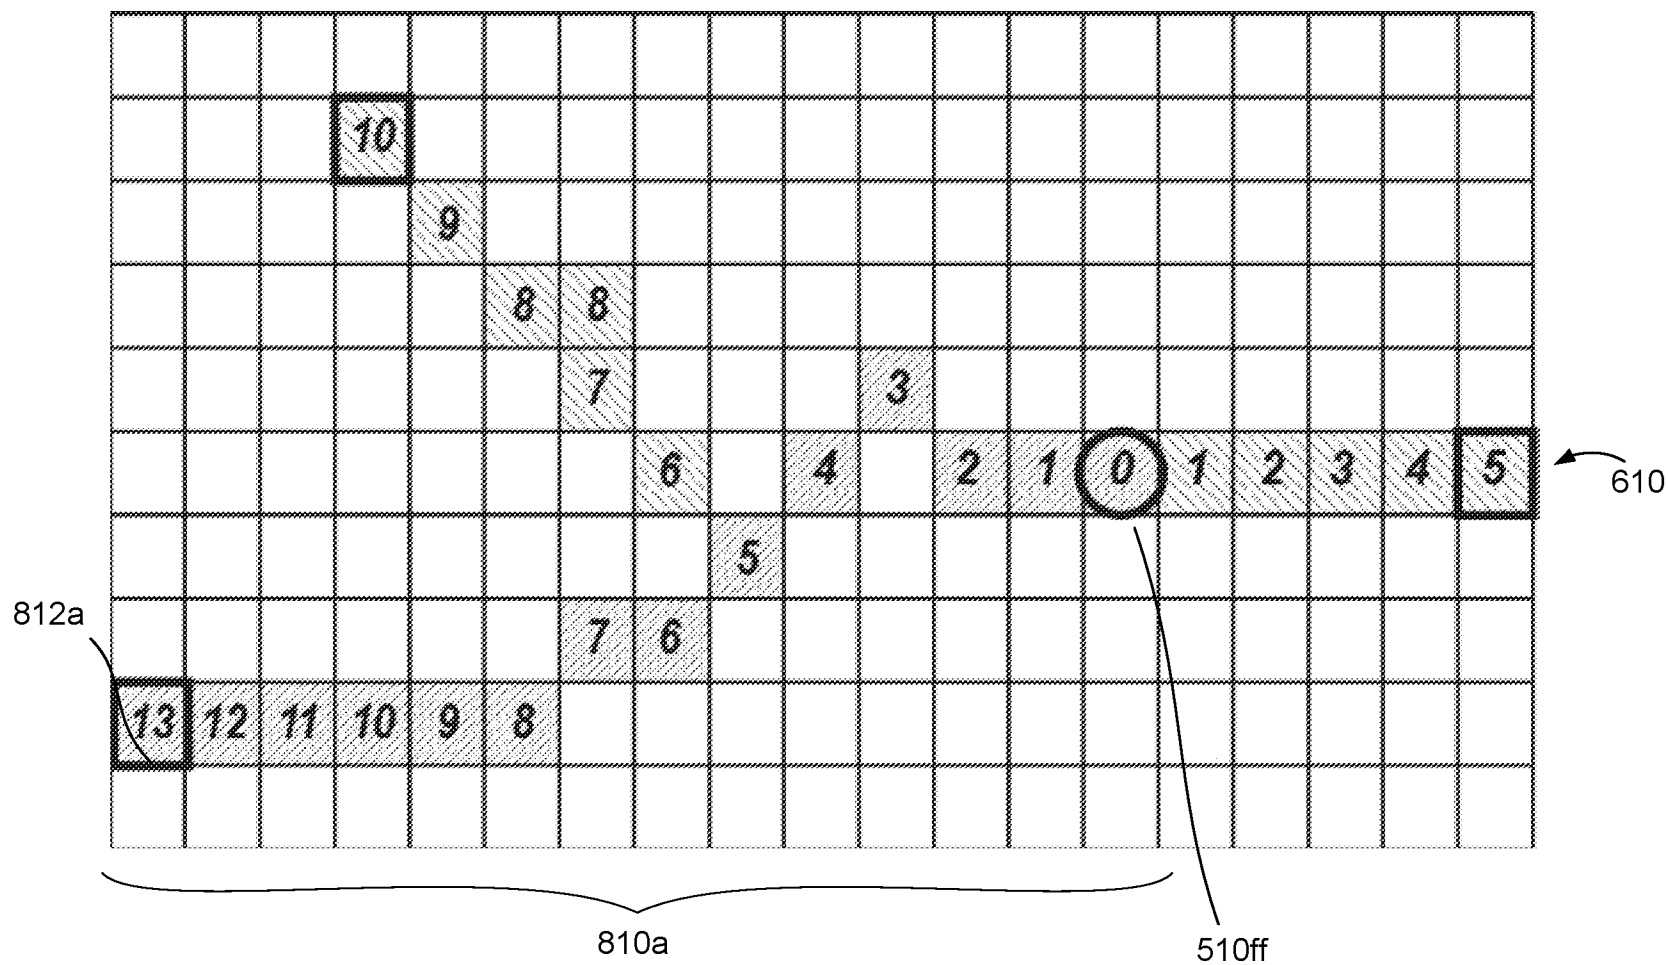
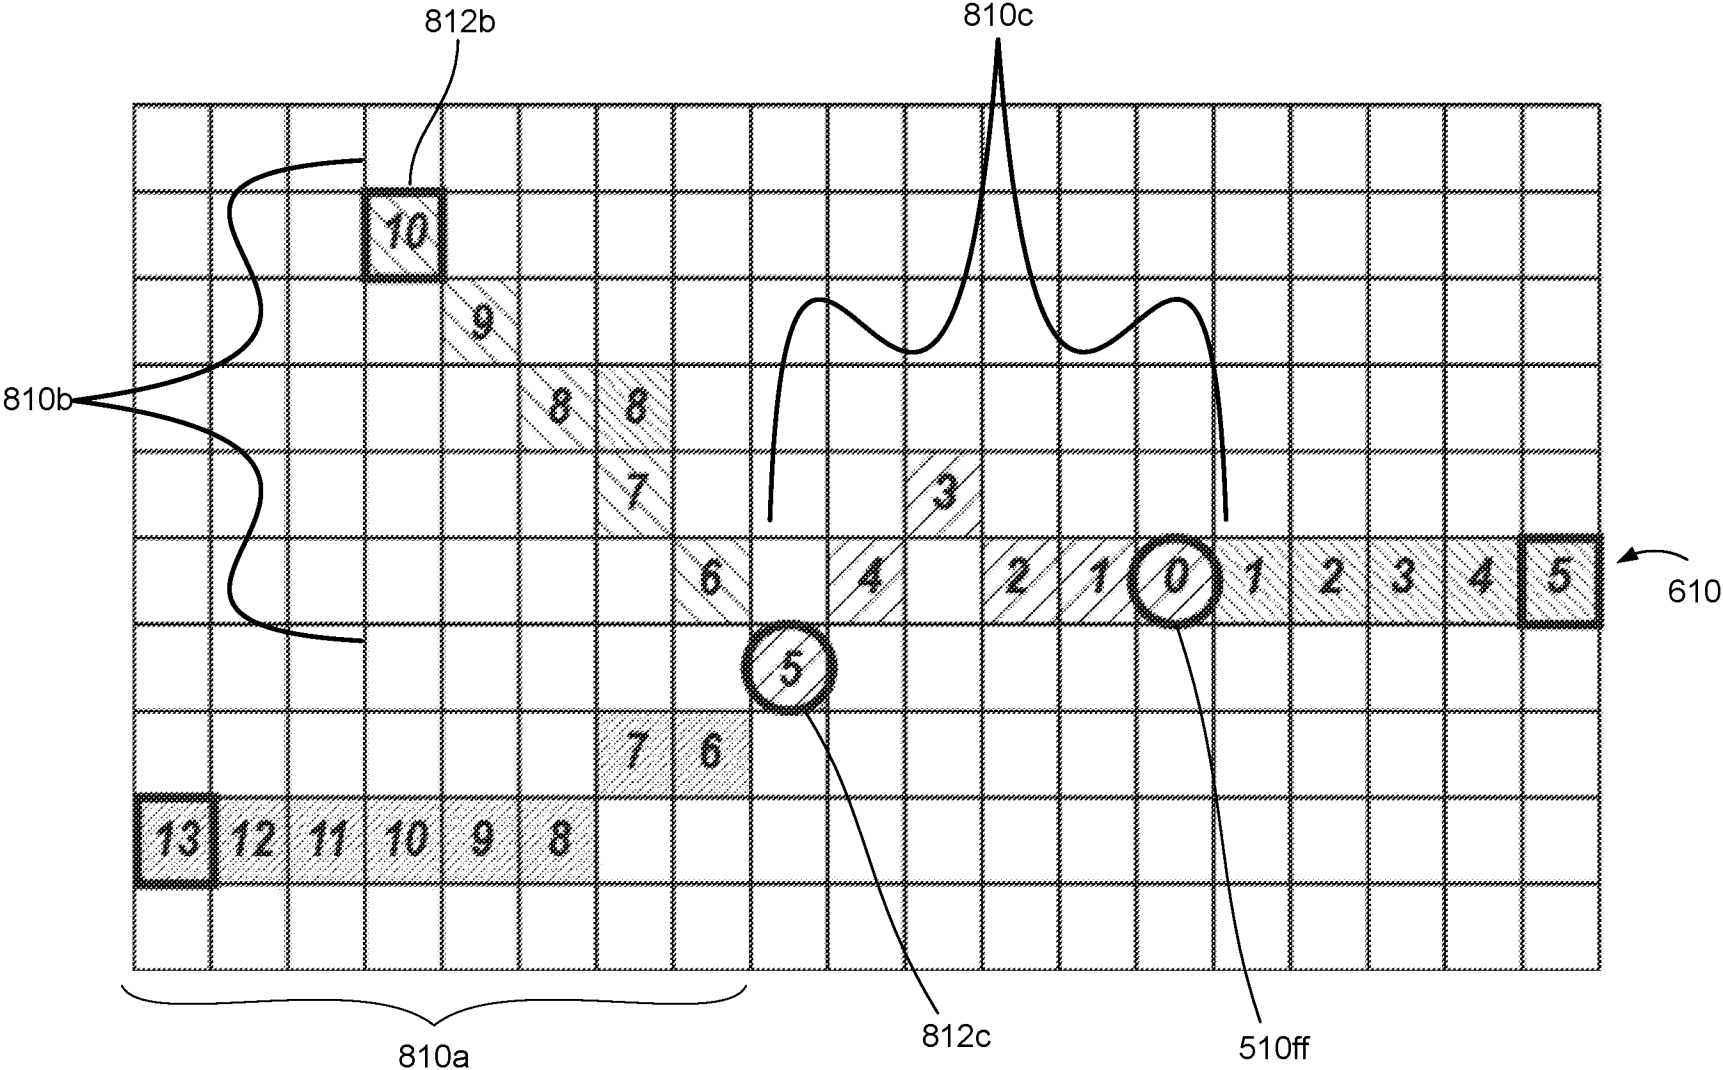


FIG. 8B



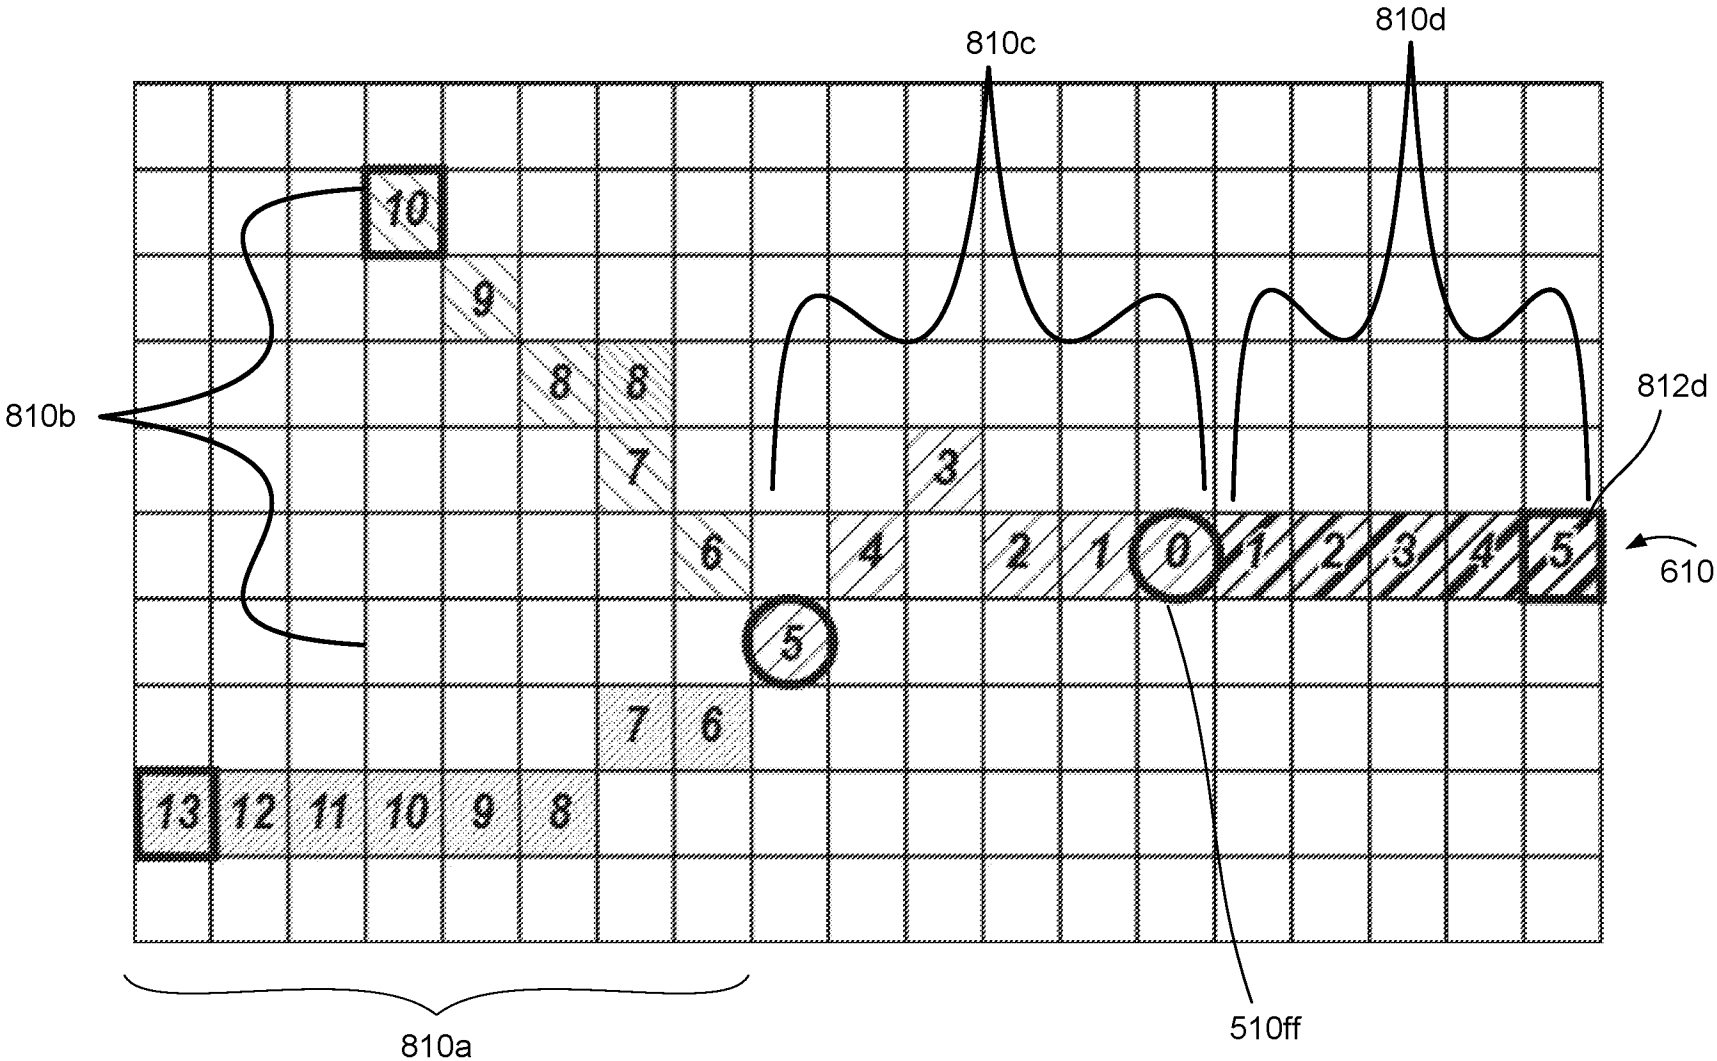


FIG. 8D

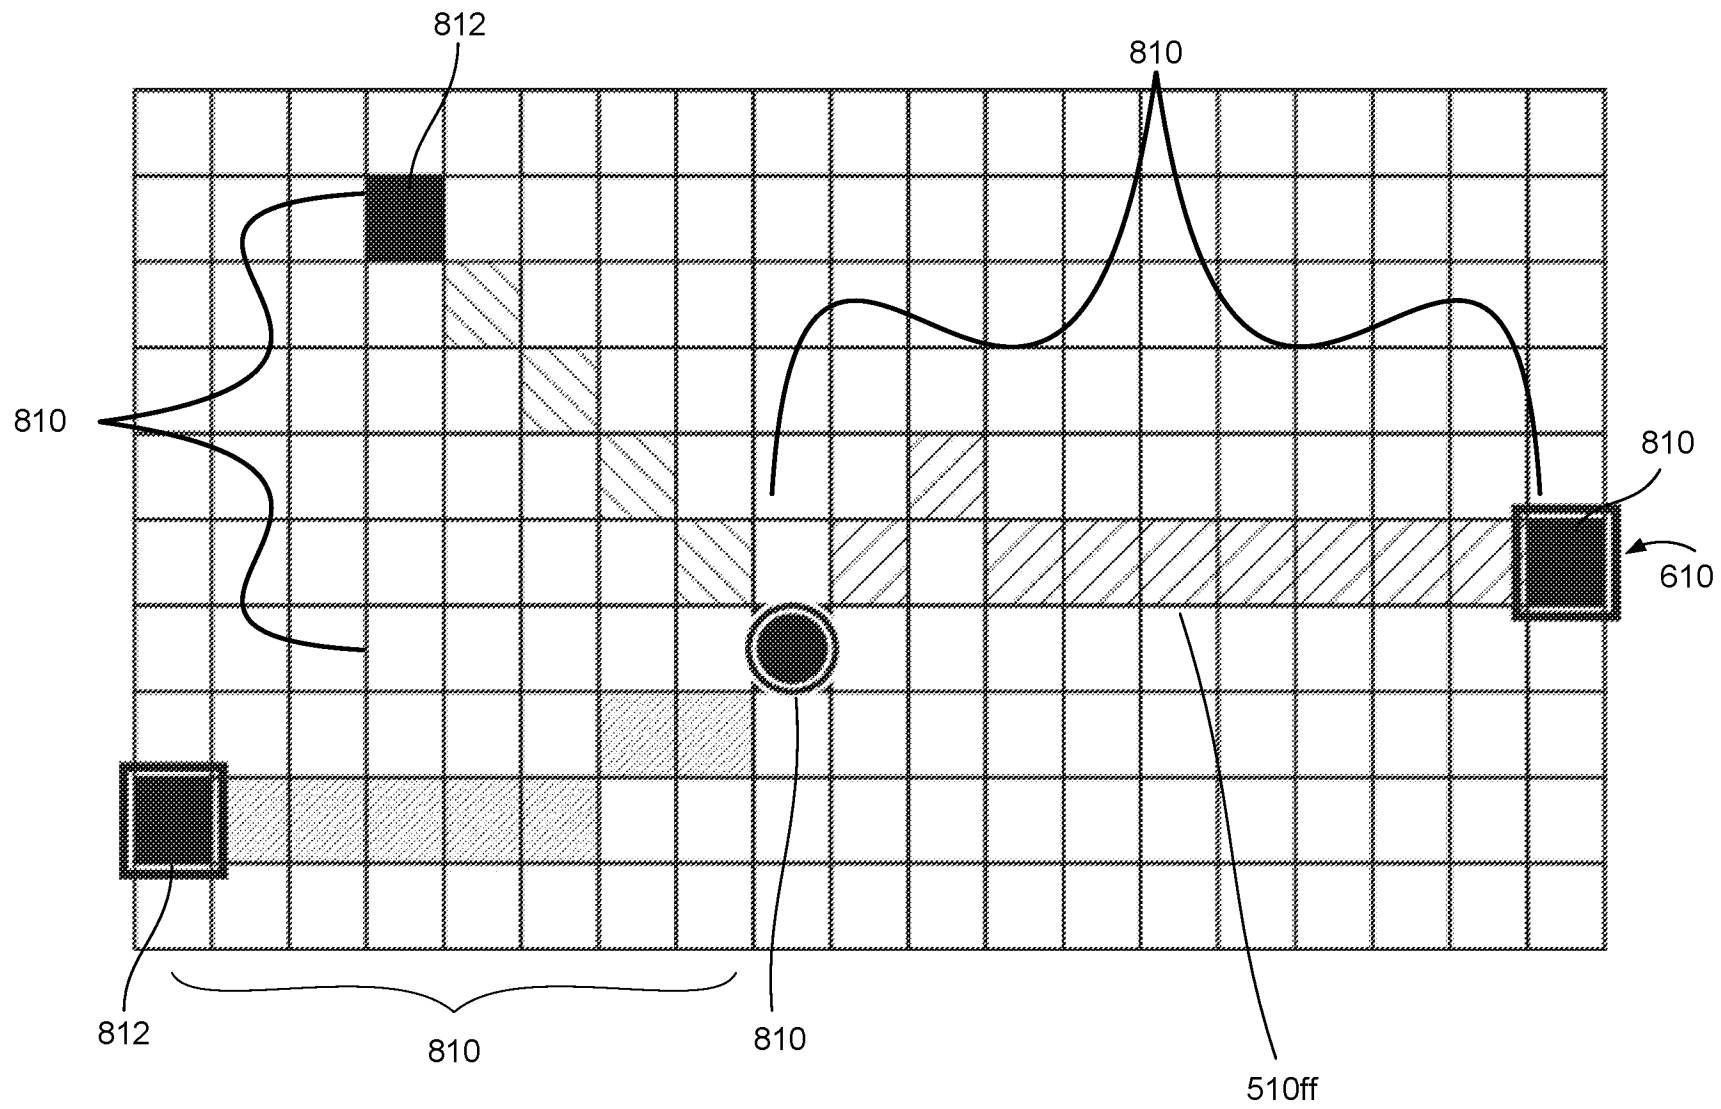


FIG. 8E

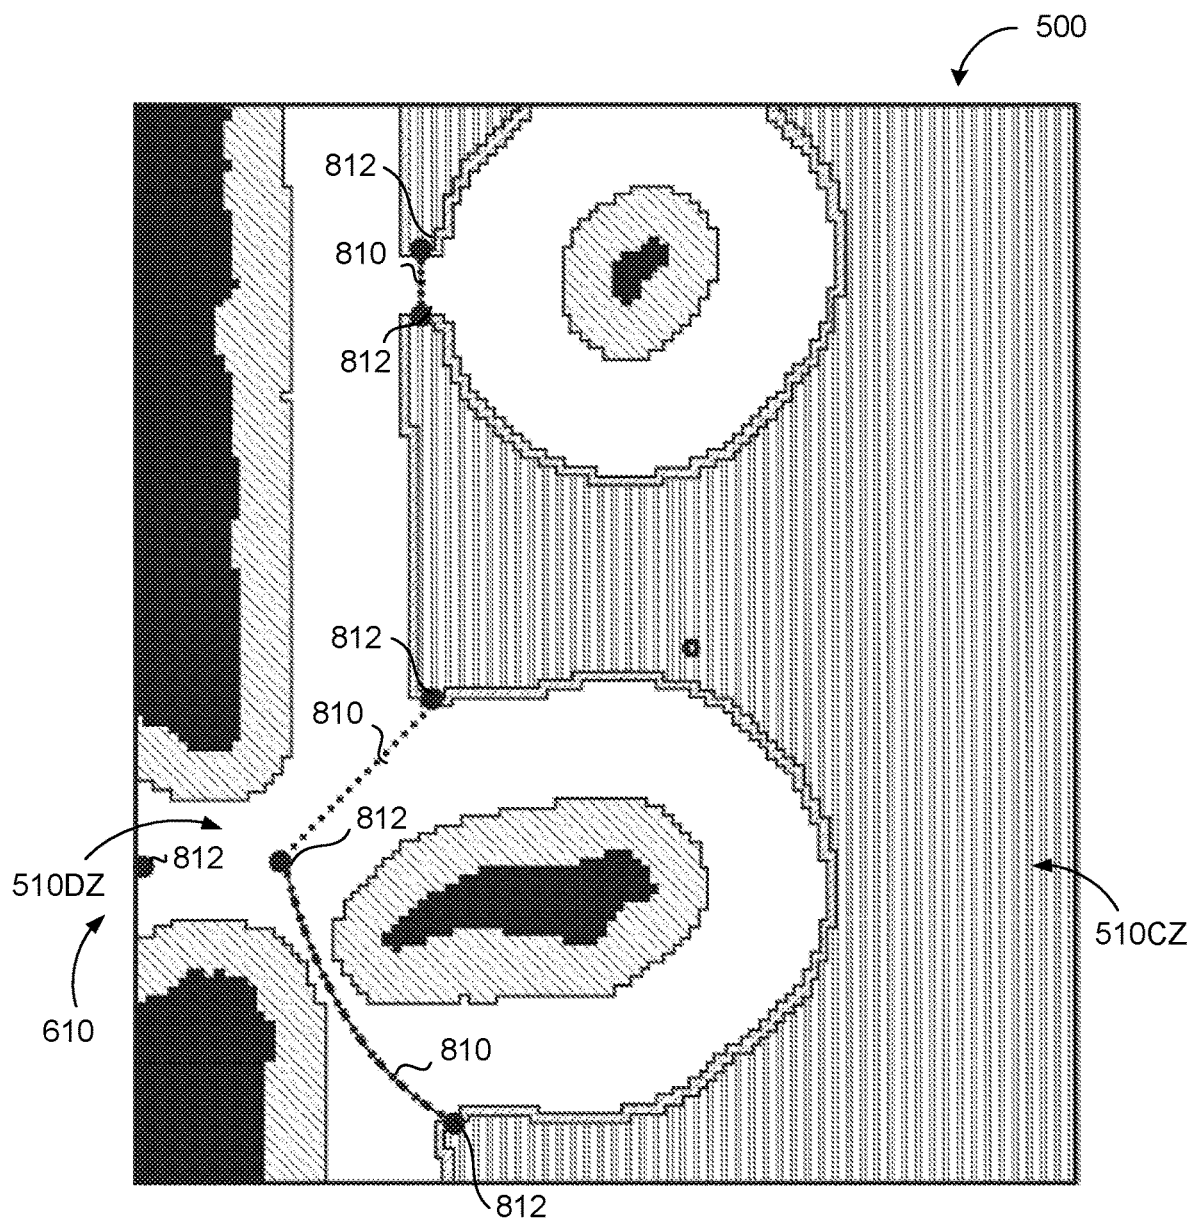


FIG. 9



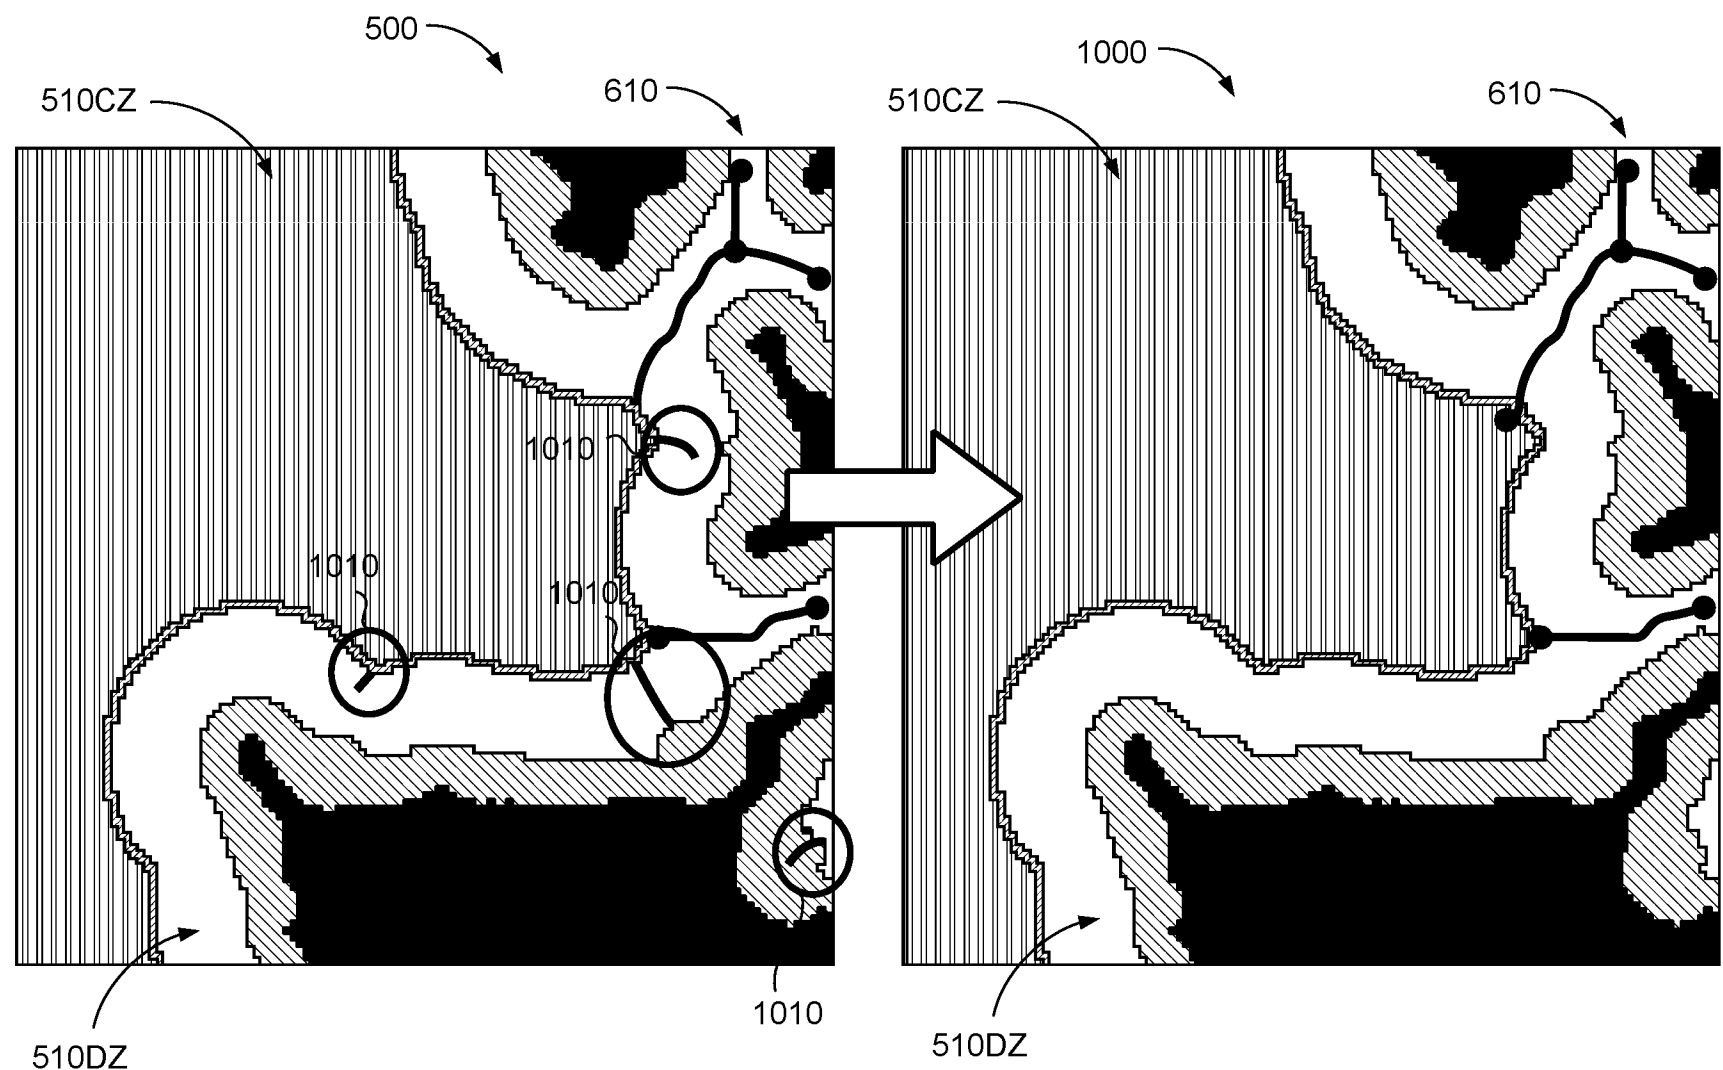


FIG. 10

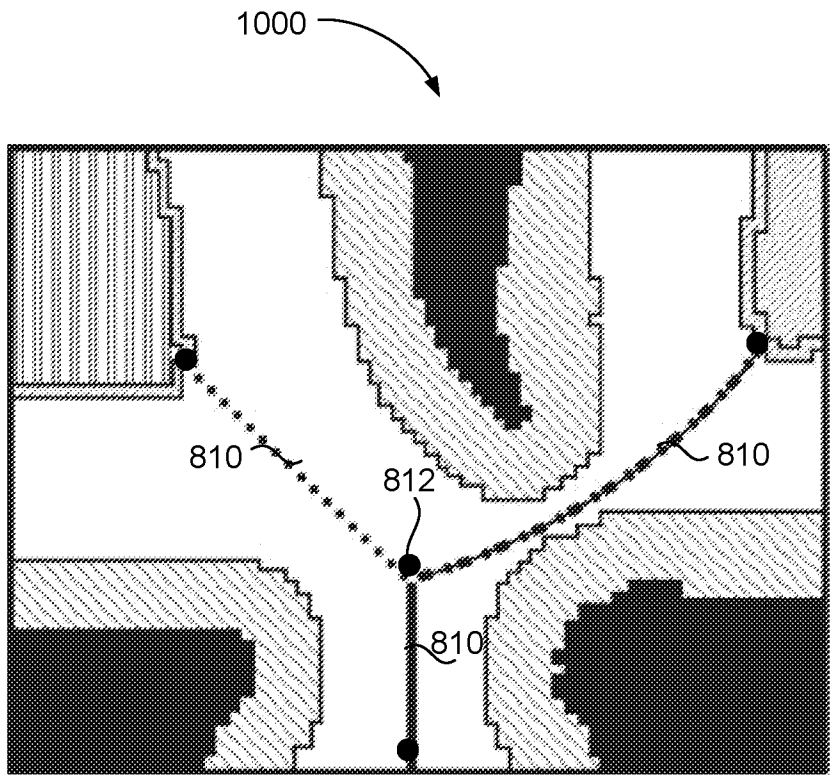

2D Map (x, y)

FIG. 11A

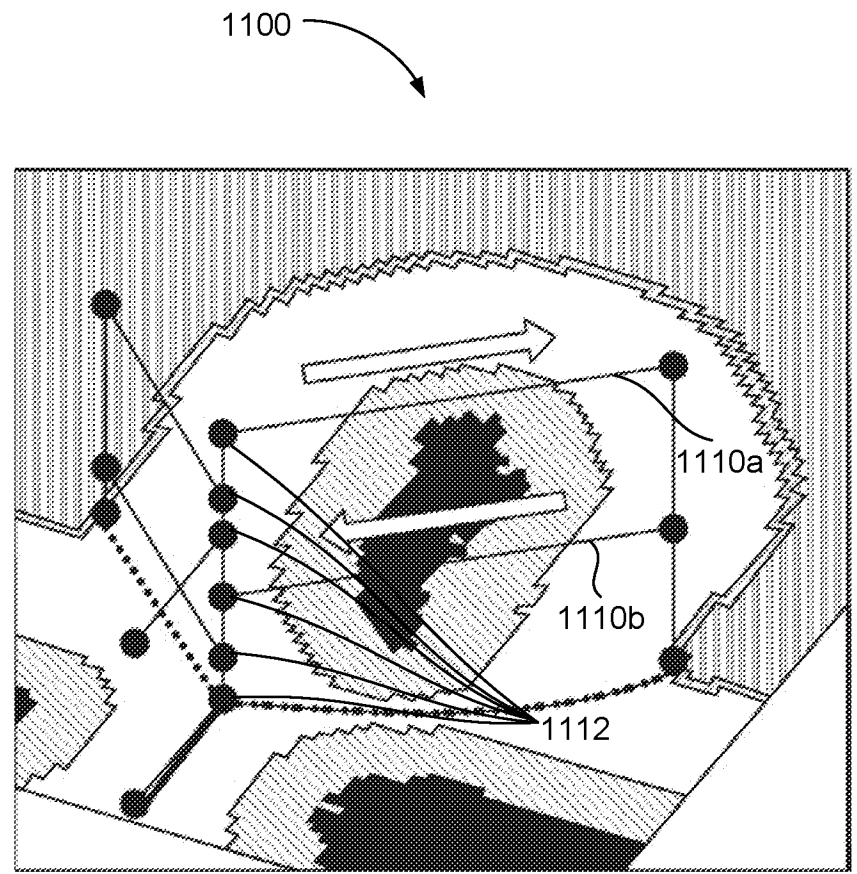

SE2 Map  
(x, y, yaw)

FIG. 11B



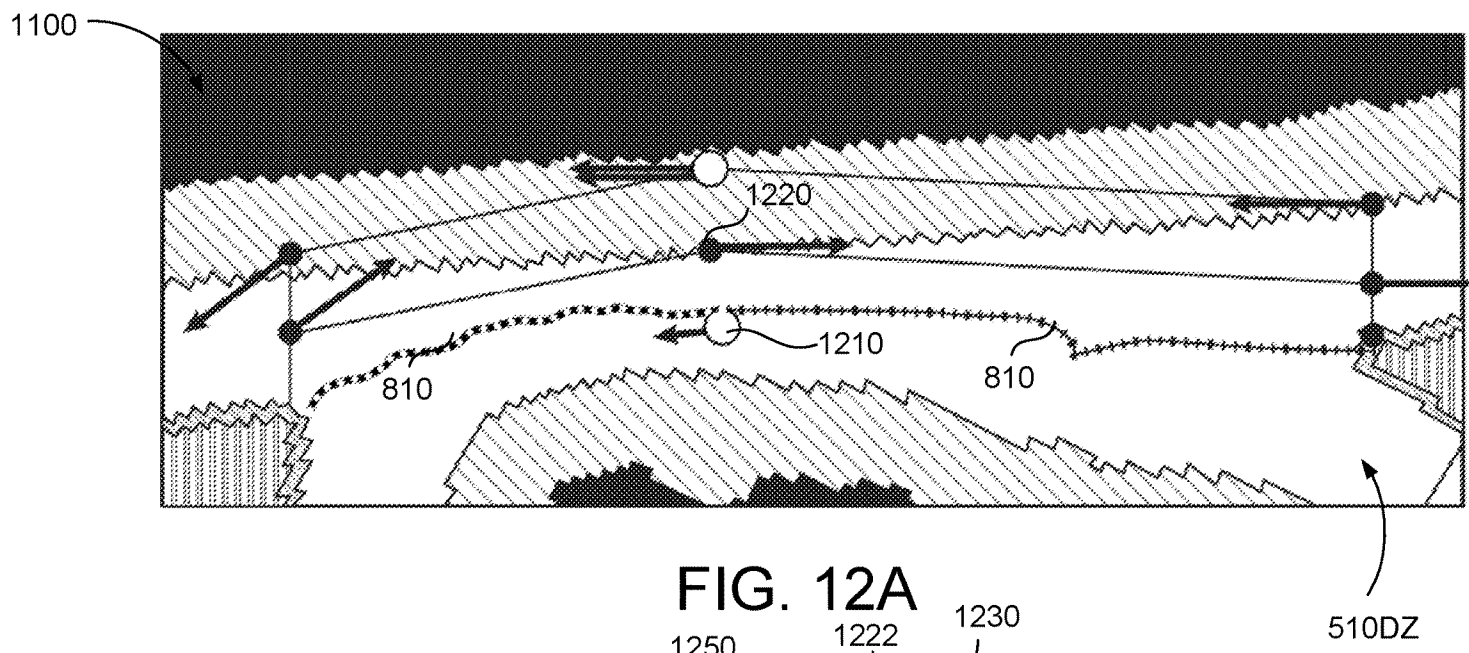


FIG. 12A

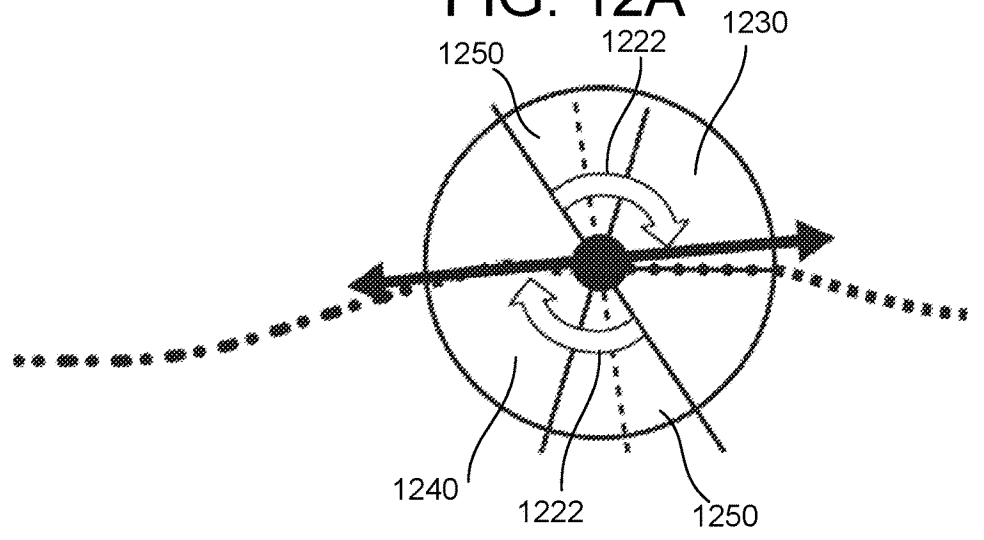


FIG. 12B

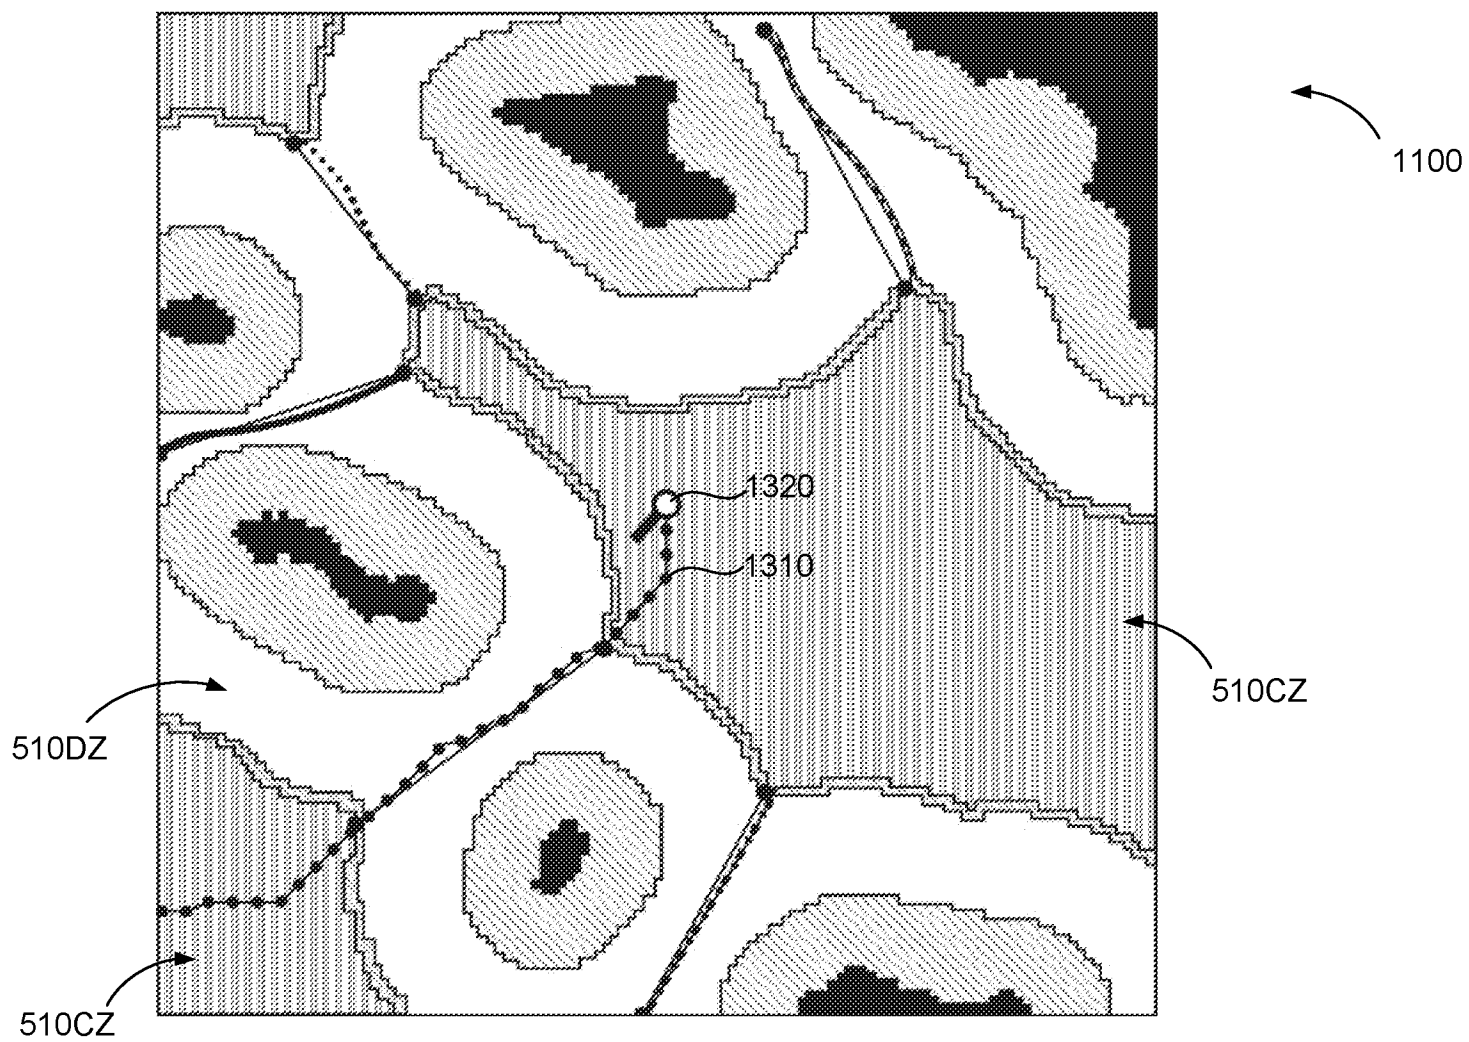


FIG. 13

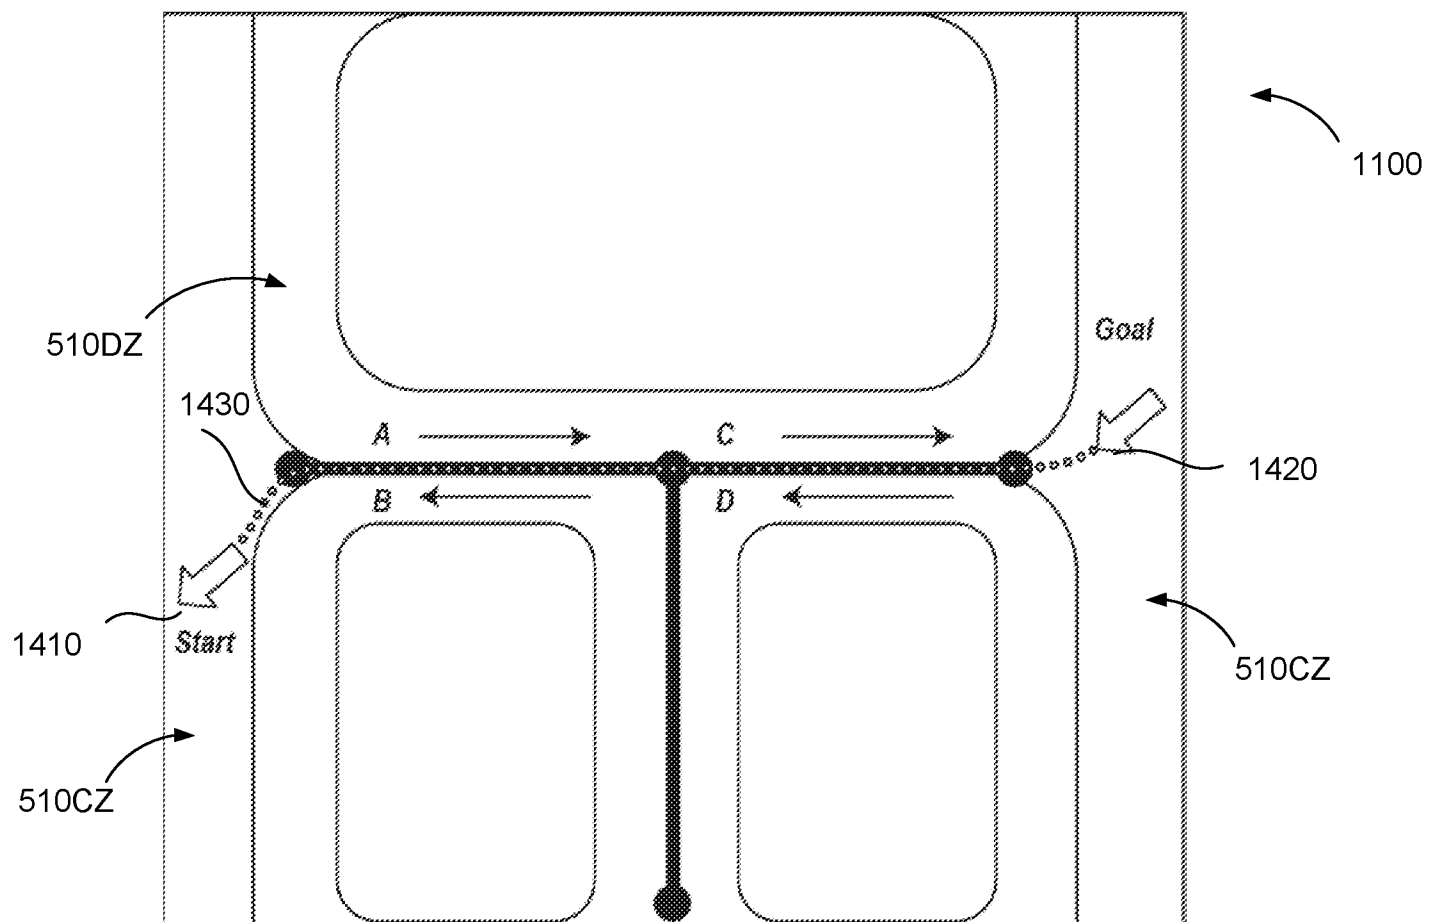


FIG. 14

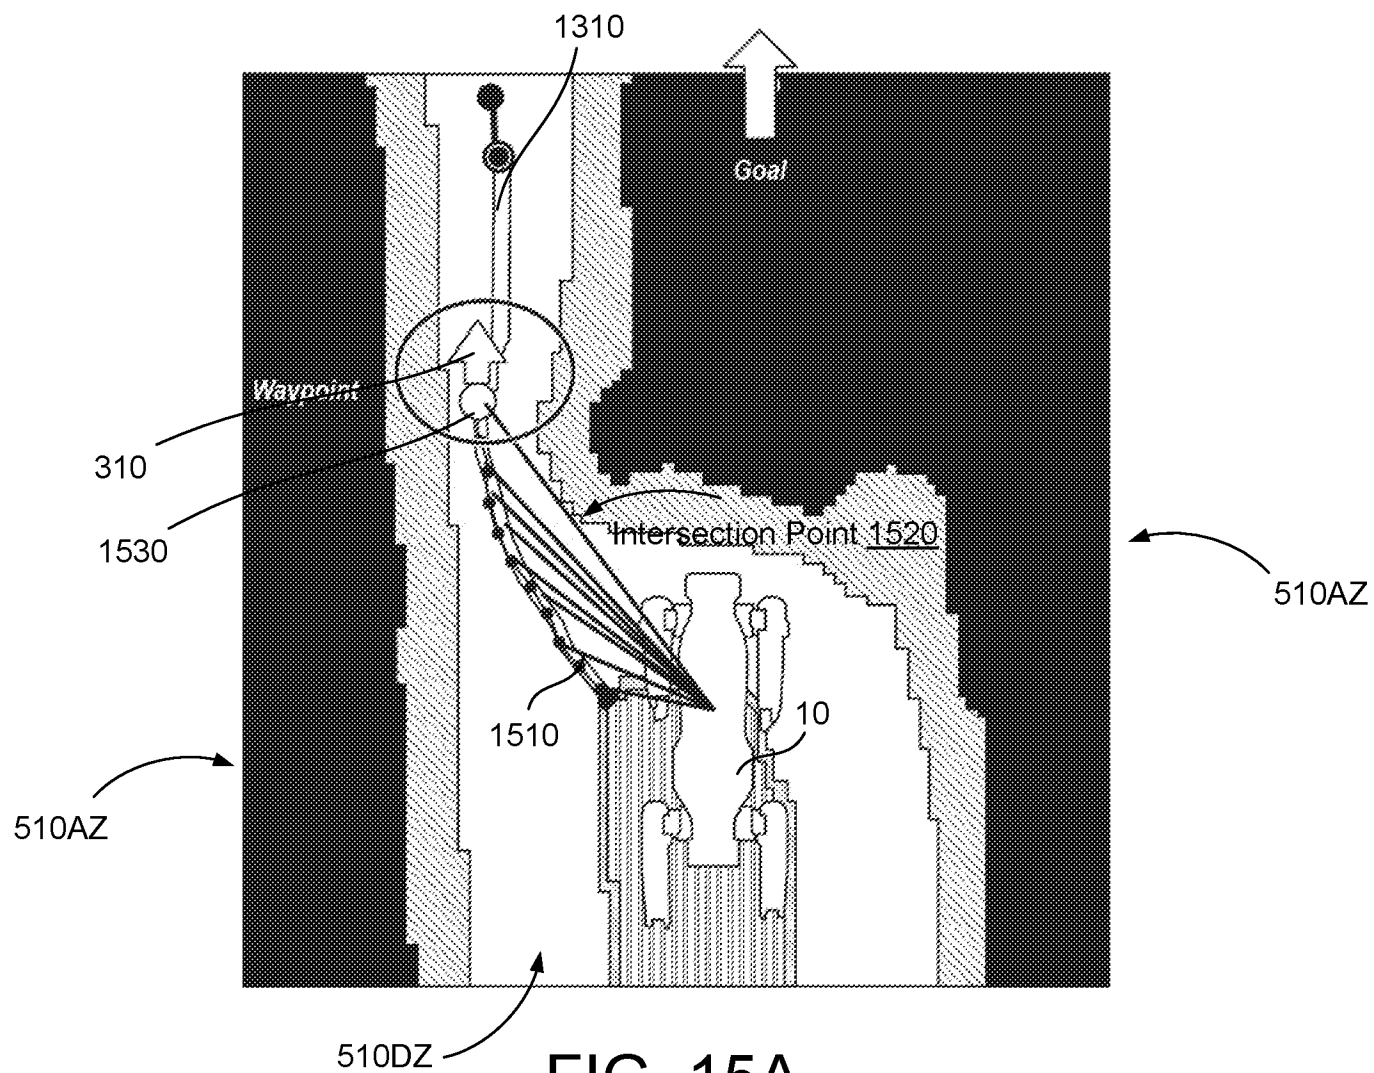


FIG. 15A

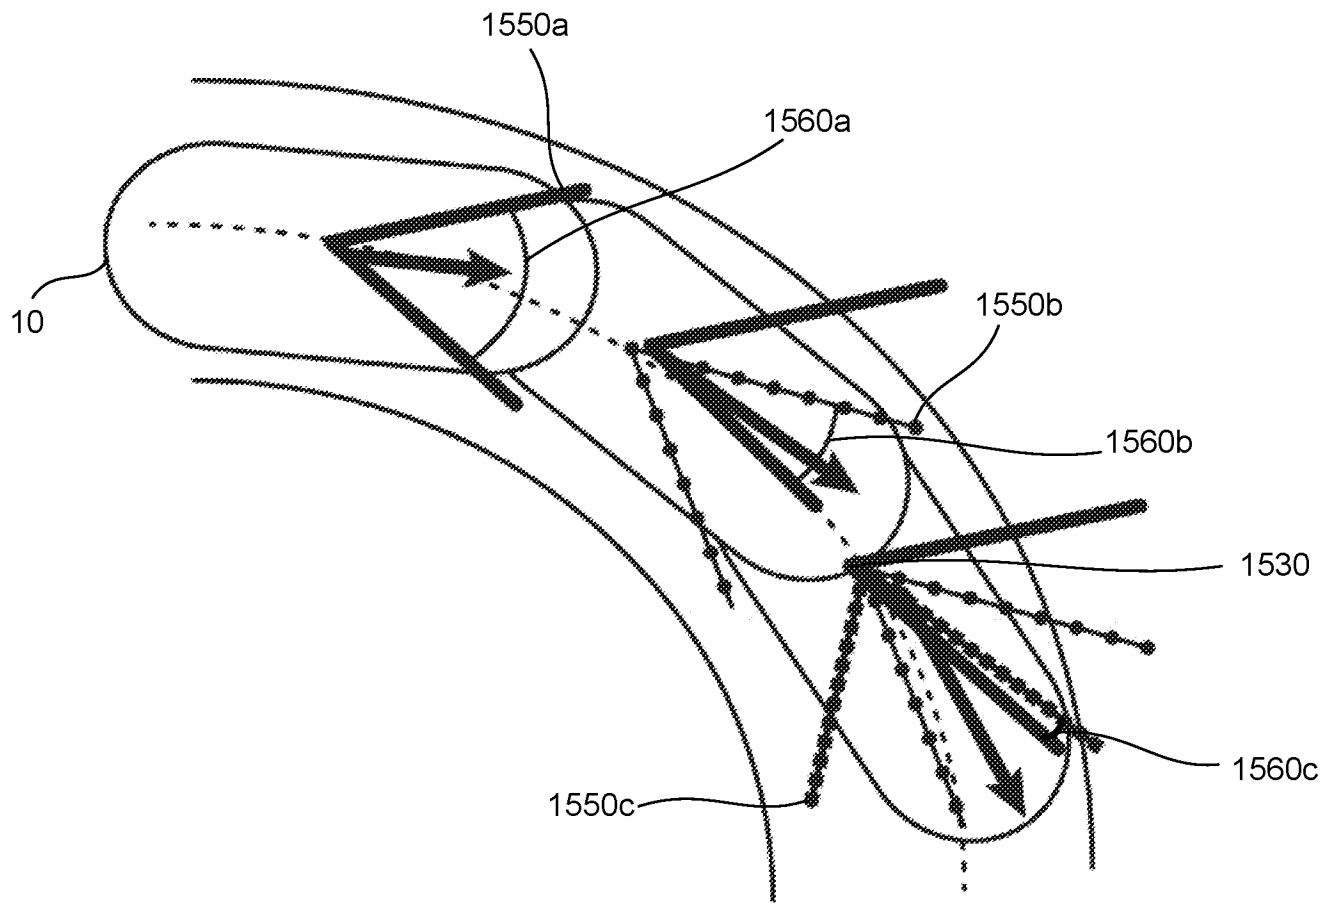


FIG. 15B

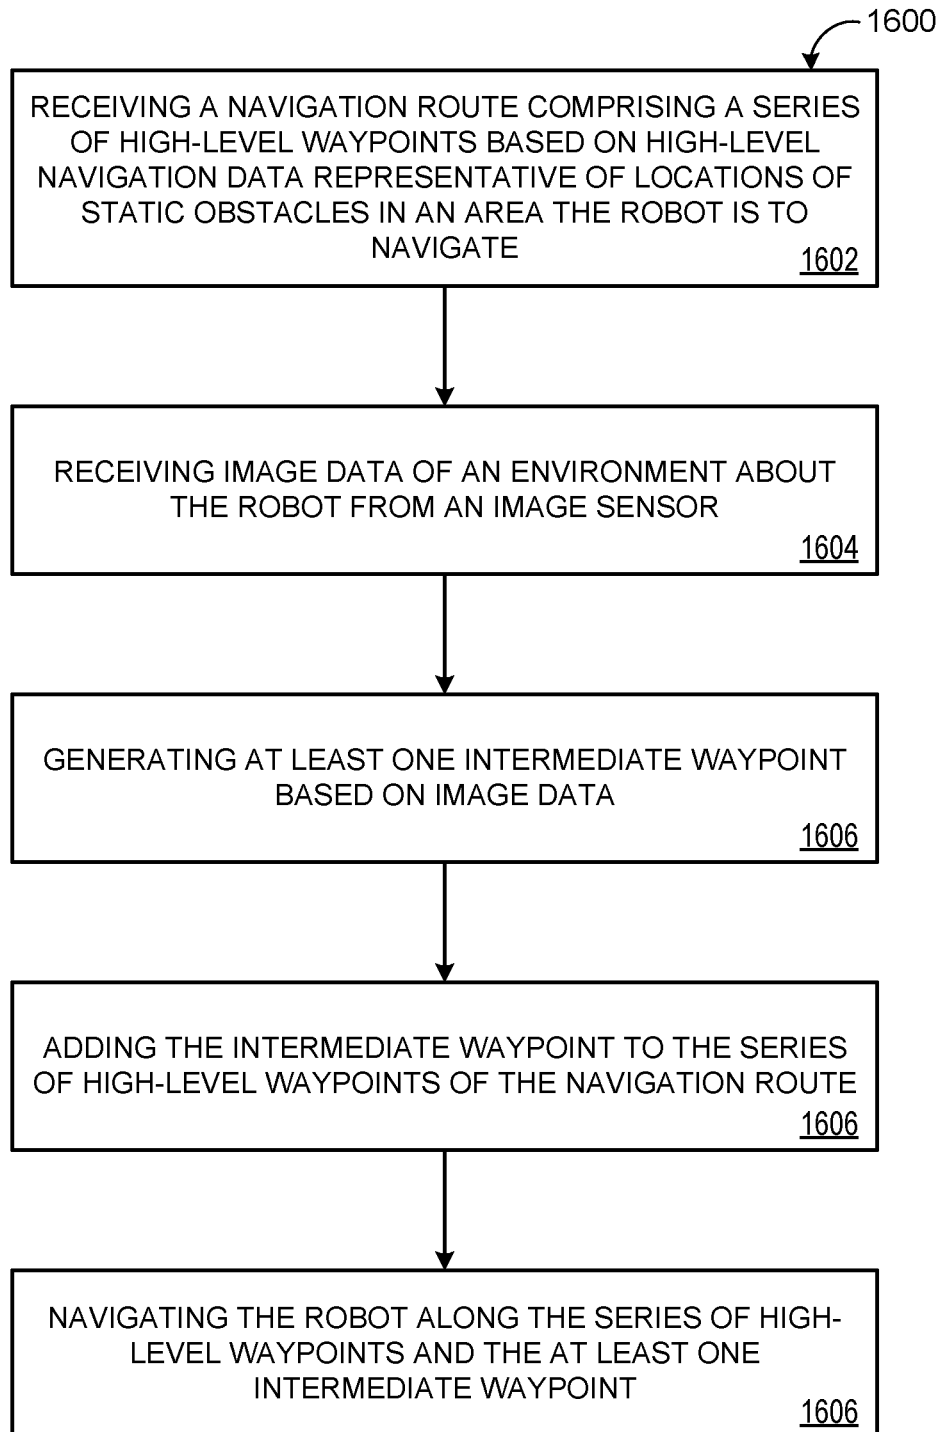


FIG. 16

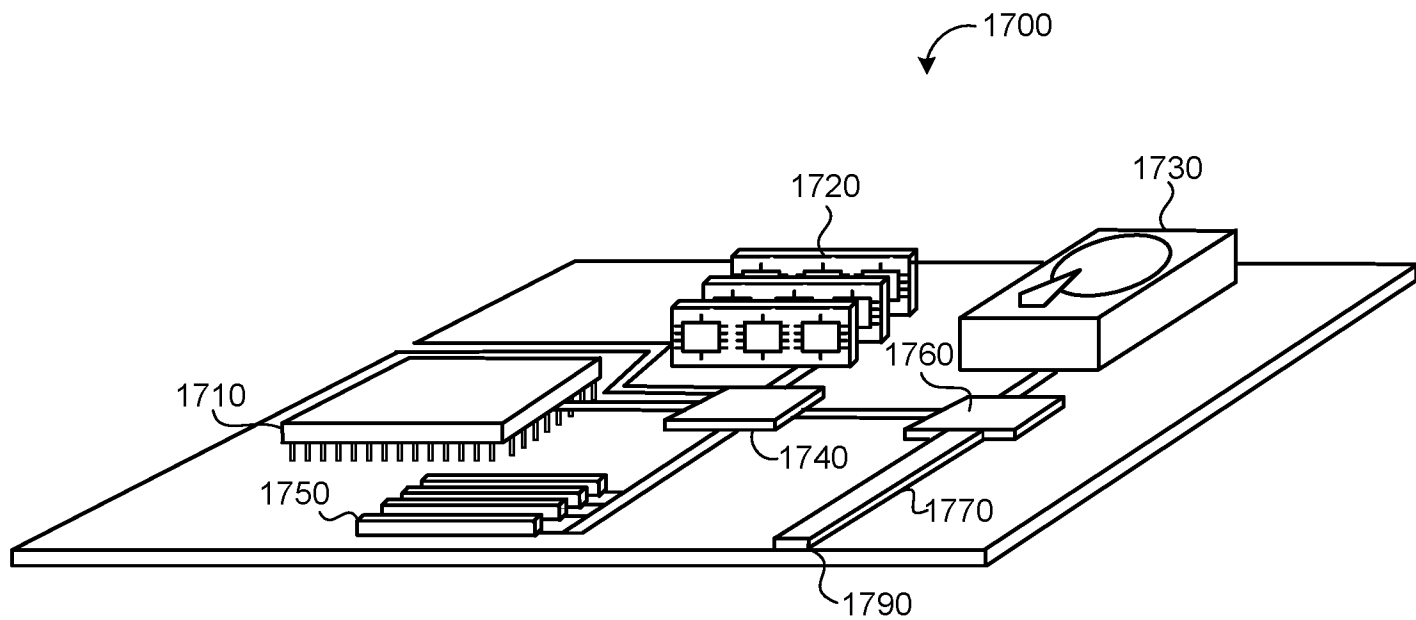


FIG. 17

## INTERMEDIATE WAYPOINT GENERATOR

### CROSS REFERENCE TO RELATED APPLICATION

**[0001]** This U.S. patent application claims priority under 35 U.S.C. § 119(e) to U.S. Provisional Application 62/883, 438, filed on Aug. 6, 2019, which is hereby incorporated by reference in its entirety.

### TECHNICAL FIELD

**[0002]** This disclosure relates to generating intermediate waypoints in the presence of constraints, especially those imposed by terrain.

### BACKGROUND

**[0003]** Robotic devices are increasingly being used to navigate constrained environments to perform a variety of tasks or functions. These robotic devices often need to navigate through these constrained environments without contacting the obstacles or becoming stuck or trapped. As these robotic devices become more prevalent, there is a need for real-time navigation and route planning that avoids contact with obstacles while successfully navigating to the destination.

### SUMMARY

**[0004]** One aspect of the disclosure provides a method for generating intermediate waypoints for a navigation system of a robot. The method includes receiving, at data processing hardware of a robot, a navigation route. The navigation route includes a series of high-level waypoints that begin at a starting location and end at a destination location and are based on high-level navigation data. The high-level navigation data is representative of locations of static obstacles in an area the robot is to navigate. The method also includes receiving, at the data processing hardware, image data of an environment about the robot from an image sensor. The method also includes generating, by the data processing hardware, at least one intermediate waypoint based on the image data. The method also includes adding, by the data processing hardware, the at least one intermediate waypoint to the series of high-level waypoints of the navigation route and navigating, by the data processing hardware, the robot from the starting location along the series of high-level waypoints and the at least one intermediate waypoint toward the destination location.

**[0005]** Implementations of the disclosure may include one or more of the following optional features. In some implementations, each high-level waypoint and each intermediate waypoint include two coordinates indicating a position on a plane, a yaw value, and a time value. The time value indicates an estimated amount of time for the robot to navigate to the respective waypoint. In some examples, the method further includes maintaining, by the data processing hardware, each of the series of high-level waypoints on the navigation route. The method may also include receiving, at the data processing hardware, a body obstacle map. The body obstacle map includes a map of obstacles that a body of the robot cannot traverse. Additionally, generating the at least one intermediate waypoint may include generating a sparse graph based on the body obstacle map. The sparse graph includes a list of nodes and edges. The nodes and edges are representative of paths the robot may travel in the

environment. The method may also include planning a coarse path from a first node from the list of nodes to a second node from the list of nodes. The first node and the second node are each representative of a space in the environment. The method may also include determining a point along the coarse path where line of sight by the image sensor is lost and generating one of the at least one intermediate waypoint at the point where line of sight is lost.

**[0006]** In some implementations, generating the sparse graph includes generating a full configuration space map based on the body obstacle map. The full configuration space map includes a two-dimensional grid of elements, where each element of the grid represents a space of the environment and each element of the full configuration space map includes a respective set of yaw configurations. Each yaw configuration may be classified as valid or invalid, where a valid yaw configuration represents a yaw configuration of the robot that is safe from contacting obstacles at the space associated with the respective element and an invalid yaw configuration represents a yaw configuration of the robot that is not safe from contacting obstacles at the space associated with the respective element. The method may also include generating a compressed configuration space map from the full configuration space map. The compressed configuration space map includes a second two-dimensional grid of elements and each element of the second grid represents a space of the environment. Each element of the second grid is also categorized as one of (i) a yaw collision zone, (ii) a yaw free zone, or (iii) a yaw constrained zone. The method, in some examples, includes generating the sparse graph from the compressed configuration space map.

**[0007]** Optionally, planning the coarse path from the first node to the second node includes generating a dense graph from the compressed configuration space map. The dense graph includes elements categorized as yaw free zone. The method may also include linking edges from the sparse graph with elements from the dense graph. Linking the edges with elements from the dense graph, in some implementations, includes combining the sparse graph and the dense graph to generate a final graph. In some examples, the method also includes executing an A\* search algorithm on the final graph.

**[0008]** In some examples, generating the sparse graph further includes overlaying a plurality of Voronoi cells onto the compressed configuration space map, where each Voronoi cell is categorized as yaw constrained zone on the sparse graph. Each Voronoi cell is equidistant from at least two elements categorized as yaw collision zone. Optionally, generating the sparse graph further includes classifying each Voronoi cell as either an edge or a node. Classifying each Voronoi cell may include executing a flood fill algorithm.

**[0009]** In some implementations, planning the coarse path from the first node to the second node includes pruning edges, and each pruned edge includes elements under a threshold length and categorized as either yaw collision zone or yaw constrained zone. Determining the point along the coarse path where line of sight by the image sensor is lost may include determining a minimum allowable yaw and a maximum allowable yaw at each element along the planned coarse path and determining a smallest envelope based on the minimum allowable yaw and the maximum allowable



yaw. The method may also include determining that a required yaw at a point on the coarse path is outside the smallest envelope.

**[0010]** In some examples, the method further includes sending, by the data processing hardware, the navigation route with the high-level waypoints and the at least one intermediate waypoint to a low-level path generator. The method may also include determining, by the data processing hardware, whether to add the at least one intermediate waypoint to the navigation route and, in response to determining not to add at the at least one intermediate waypoint to the navigation route, passing, by the data processing hardware, the navigation route unaltered to the low-level path generator.

**[0011]** Another aspect of the disclosure provides a robot that includes a body and legs coupled to the body and configured to maneuver the robot about an environment. The robot also includes data processing hardware in communication with the legs and memory hardware in communication with the data processing hardware. The memory hardware stores instructions that when executed on the data processing hardware cause the data processing hardware to perform operations. The operations include receiving a navigation route. The navigation route includes a series of high-level waypoints that begin at a starting location and end at a destination location and are based on high-level navigation data. The high-level navigation data is representative of locations of static obstacles in an area the robot is to navigate. The operations also include receiving image data of an environment about the robot from an image sensor. The operations also include generating at least one intermediate waypoint based on the image data. The operations also include adding the at least one intermediate waypoint to the series of high-level waypoints of the navigation route and navigating the robot from the starting location along the series of high-level waypoints and the at least one intermediate waypoint toward the destination location.

**[0012]** This aspect may include one or more of the following optional features. In some implementations, each high-level waypoint and each intermediate waypoint include two coordinates indicating a position on a plane, a yaw value, and a time value. The time value indicates an estimated amount of time for the robot to navigate to the respective waypoint. In some examples, the operations further include maintaining each of the series of high-level waypoints on the navigation route. The operations may also include receiving a body obstacle map. The body obstacle map includes a map of obstacles that a body of the robot cannot traverse. Additionally, generating the at least one intermediate waypoint may include generating a sparse graph based on the body obstacle map. The sparse graph includes a list of nodes and edges. The nodes and edges are representative of paths the robot may travel in the environment. The operations may also include planning a coarse path from a first node from the list of nodes to a second node from the list of nodes. The first node and the second node are each representative of a space in the environment. The operations may also include determining a point along the coarse path where line of sight by the image sensor is lost and generating one of the at least one intermediate waypoint at the point where line of sight is lost.

**[0013]** In some implementations, generating the sparse graph includes generating a full configuration space map based on the body obstacle map. The full configuration

space map includes a two-dimensional grid of elements, where each element of the grid represents a space of the environment and each element of the full configuration space map includes a respective set of yaw configurations. Each yaw configuration may be classified as valid or invalid, where a valid yaw configuration represents a yaw configuration of the robot that is safe from contacting obstacles at the space associated with the respective element and an invalid yaw configuration represents a yaw configuration of the robot that is not safe from contacting obstacles at the space associated with the respective element. The operations may also include generating a compressed configuration space map from the full configuration space map. The compressed configuration space map includes a second two-dimensional grid of elements and each element of the second grid represents a space of the environment. Each element of the second grid is also categorized as one of (i) a yaw collision zone, (ii) a yaw free zone, or (iii) a yaw constrained zone. The operations, in some examples, include generating the sparse graph from the compressed configuration space map.

**[0014]** Optionally, planning the coarse path from the first node to the second node includes generating a dense graph from the compressed configuration space map. The dense graph includes elements categorized as yaw free zone. The operations may also include linking edges from the sparse graph with elements from the dense graph. Linking the edges with elements from the dense graph, in some implementations, includes combining the sparse graph and the dense graph to generate a final graph. In some examples, the operations also include executing an A\* search algorithm on the final graph.

**[0015]** In some examples, generating the sparse graph further includes overlaying a plurality of Voronoi cells onto the compressed configuration space map, where each Voronoi cell is categorized as yaw constrained zone on the sparse graph. Each Voronoi cell is equidistant from at least two elements categorized as yaw collision zone. Optionally, generating the sparse graph further includes classifying each Voronoi cell as either an edge or a node. Classifying each Voronoi cell may include executing a flood fill algorithm.

**[0016]** In some implementations, planning the coarse path from the first node to the second node includes pruning edges, and each pruned edge includes elements under a threshold length and categorized as either yaw collision zone or yaw constrained zone. Determining the point along the coarse path where line of sight by the image sensor is lost may include determining a minimum allowable yaw and a maximum allowable yaw at each element along the planned coarse path and determining a smallest envelope based on the minimum allowable yaw and the maximum allowable yaw. The operations may also include determining that a required yaw at a point on the coarse path is outside the smallest envelope.

**[0017]** In some examples, the operations further include sending the navigation route with the high-level waypoints and the at least one intermediate waypoint to a low-level path generator. The operations may also include determining whether to add the at least one intermediate waypoint to the navigation route and, in response to determining not to add at the at least one intermediate waypoint to the navigation route, passing the navigation route unaltered to the low-level path generator.

[0018] The details of one or more implementations of the disclosure are set forth in the accompanying drawings and the description below. Other aspects, features, and advantages will be apparent from the description and drawings, and from the claims.

#### DESCRIPTION OF DRAWINGS

[0019] FIG. 1 is a schematic view of an example system for a navigation system that generates intermediate waypoints for a robot.

[0020] FIGS. 2A and 2B are schematic views of a robot navigating a navigation route using high-level waypoints.

[0021] FIG. 3 is a schematic view of the robot navigating the navigation route of FIGS. 2A and 2B using high-level waypoints and an intermediate waypoint.

[0022] FIG. 4 is a schematic view of an example intermediate waypoint generator of the navigation system of FIG. 1.

[0023] FIG. 5 is a schematic view of a compressed configuration space map.

[0024] FIG. 6 is a schematic view of the configuration space map of FIG. 5 overlaid with a Voronoi cells.

[0025] FIG. 7 is a schematic view of the Voronoi cells of FIG. 6 showing distances between elements and the nearest obstacle for the Voronoi cell.

[0026] FIGS. 8A-8E are schematic views of a flood fill algorithm filling the Voronoi cells of FIG. 6.

[0027] FIG. 9 is a schematic view of edges and nodes derived from the Voronoi cells of FIG. 6.

[0028] FIG. 10 is a schematic view of pruned edges and nodes derived from the Voronoi cells of FIG. 6.

[0029] FIGS. 11A and 11B are schematic views of a two-dimensional sparse graph (FIG. 11A) and a SE2 sparse graph (FIG. 11B).

[0030] FIGS. 12A and 12B are schematic views of an added node for a goal destination.

[0031] FIG. 13 is a schematic view of a path through yaw free zones and yaw constrained zones.

[0032] FIG. 14 is a schematic view of a path through a yaw constrained zone.

[0033] FIGS. 15A and 15B are schematic views of a navigation route for a robot including intermediate waypoints placed at locations where line-of-sight is lost.

[0034] FIG. 16 is a flowchart of an example method for generating intermediate waypoints for a navigation system of a robot.

[0035] FIG. 17 is a schematic view of an example computing device that may be used to implement the systems and methods described herein.

[0036] Like reference symbols in the various drawings indicate like elements.

#### DETAILED DESCRIPTION

[0037] As legged robotic devices (also referred to as “robots”) become more prevalent, there is an increasing need for the robots to autonomously navigate environments that are constrained in a number of ways. Often, the robots rely on high-level map data that stores information relating to large and/or static objects (e.g., walls, doors, etc.). When given a destination goal, the robot will often first plot a path or course from this high-level map to navigate the static obstacles and then rely on a perception system that gathers low-level navigation data to navigate around small and

dynamic objects encountered while travelling. Frequently, when navigating these sort of environments, the robot encounters an obstacle that is not accounted for in the high-level map, but is too large for the low-level system to navigate around. In these situations, it is not uncommon for the robot to become stuck or trapped. Implementations herein are directed toward systems and methods for an intermediate waypoint generator for generating intermediate waypoints to a high-level route in real-time, thus allowing a legged robotic device to efficiently navigate around larger dynamic objects.

[0038] Referring to FIG. 1, a robot or robotic device 10 includes a body 11 with two or more legs 12 and executes a navigation system 100 for enabling the robot 10 to navigate a constrained environment 8. Each leg 12 is coupled to the body 11 and may have an upper portion 14 and a lower portion 16 separated by a leg joint 18. The lower portion 16 of each leg 12 ends in a foot 19. The foot 19 of each leg is optional and the terminal end of the lower portion of one or more of the leg 12 may be coupled to a wheel or the distal end of each leg 12 may directly contact the a ground surface 9. The robot 10 has a vertical gravitational axis  $V_g$  along a direction of gravity, and a center of mass CM, which is a point where the weighted relative position of the distributed mass of the robot 10 sums to zero. The robot 10 further has a pose P based on the CM relative to the vertical gravitational axis  $V_g$  (i.e., the fixed reference frame with respect to gravity) to define a particular attitude or stance assumed by the robot 10. The attitude of the robot 10 can be defined by an orientation or an angular position of the robot 10 in space. Movement by the legs 12 relative to the body 11 alters the pose P of the robot 10 (i.e., the combination of the position of the CM of the robot and the attitude or orientation of the robot 10).

[0039] In some implementations, the robot 10 further includes one or more appendages, such as an articulated arm 20 disposed on the body 11 and configured to move relative to the body 11. The articulated arm 20 may have five-degrees or more of freedom. Moreover, the articulated arm 20 may be interchangeably referred to as a manipulator arm or simply an appendage. In the example shown, the articulated arm 20 includes two portions 22, 24 rotatable relative to one another and also the body 11; however, the articulated arm 20 may include more or less portions without departing from the scope of the present disclosure. The first portion 22 may be separated from second portion 24 by an articulated arm joint 26. An end effector 28, which may be interchangeably referred to as a manipulator head 28, may be coupled to a distal end of the second portion 24 of the articulated arm 20 and may include one or more actuators 29 for gripping/grasping objects.

[0040] The robot 10 also includes a vision system 30 with at least one imaging sensor or camera 31, each sensor or camera 31 capturing image data or sensor data 17 of the environment 8 surrounding the robot 10 with an angle of view 32 and within a field of view 34. The vision system 30 may be configured to move the field of view 34 by adjusting the angle of view 32 or by panning and/or tilting (either independently or via the robot 10) the camera 31 to move the field of view 34 in any direction. Alternatively, the vision system 30 may include multiple sensors or cameras 31 such that the vision system 30 captures a generally 360-degree field of view around the robot 10.

[0041] The camera(s) 31 of the vision system 30, in some implementations, include one or more stereo cameras (e.g., one or more RGBD stereo cameras). In other examples, the vision system 30 includes one or more radar sensors such as a scanning light-detection and ranging (LIDAR) sensor, or a scanning laser-detection and ranging (LADAR) sensor, a light scanner, a time-of-flight sensor, or any other three-dimensional (3D) volumetric image sensor (or any such combination of sensors). In some implementations, the navigation system 100 includes a perception system 102 that receives and processes the sensor data 17 and passes the processed sensor data 17 to the intermediate waypoint generator 120 and low-level path generator 130.

[0042] The vision system 30 provides image data or sensor data 17 derived from image data captured by the cameras or sensors 31 to data processing hardware 36 of the robot 10. The data processing hardware 36 is in digital communication with memory hardware 38 and, in some implementations, may be a remote system. The remote system may be a single computer, multiple computers, or a distributed system (e.g., a cloud environment) having scalable/elastic computing resources and/or storage resources. A navigation system 100 of the robot 10 executes on the data processing hardware 36.

[0043] In the example shown, the navigation system 100 includes a high-level waypoint generator 110 that receives map data 50 (i.e., high-level navigation data representative of locations of static obstacles in an area the robot 10 is to navigate) and generates one or more high-level waypoints 210 (FIGS. 2A and 2B) for a navigation route 112 that plot a coarse path around large and/or static obstacles from a current location of the robot 10 to a goal destination. For example, the high-level waypoint generator 110 may produce the coarse path over a greater than 10 meter scale (e.g., distances greater than 10 meters from the robot 10). The navigation system 100 also includes an intermediate waypoint generator 120 that receives the navigation route 112 and the image or sensor data 17 from the vision system 30 and includes an intermediate waypoint generator 120. Based on sensor data 17, the intermediate waypoint generator 120 may add one or more intermediate waypoints 310 (FIG. 3) to the high-level waypoints 210 (FIGS. 2A, 2B, and 3) of the navigation route 112 that form the coarse path or trajectory for the robot 10 to travel. The high-level waypoints 210 and any added intermediate waypoints 310 of the navigation route 112 are passed to a low-level path generator 130 that, combined with the sensor data 17, generates a step plan 142 that plots each individual step of the robot 10 to navigate from the current location of the robot 10 to the next waypoint 210, 310. Using the step plan 142, the robot 10 maneuvers through the environment 8 by following the step plan 142 by placing the feet 19 or distal ends of the leg 12 on the ground surface 9 at the locations indicated by the step plan 142. In some implementations, the low-level path generator 130 provides lower level obstacle avoidance by using a potential field method to avoid obstacles on an approximate four meter scale. The potential field method may “push” the robot 10 away from obstacles by integrating a sum of a velocity toward a goal and an obstacle avoidance velocity.

[0044] In some implementations, at least a portion of the navigation system 100 executes on a remote device in communication with the robot 10. For instance, the high-level waypoint generator 110 may execute on a remote

device to generate one or more of the high-level waypoints 210 and the intermediate waypoint generator 120 executing on the robot 10 may receive the high-level waypoints 210 from the remote device. Optionally, the entire navigation system 100 may execute on a remote device and the remote device may control/instruct the robot 10 to maneuver the environment 8 based the step plan 142.

[0045] Referring now to FIGS. 2A and 2B, the low-level path generator 130 (using, for example, the potential field method) may encounter issues when navigating obstacles of certain shape and/or convexity. For example, the low-level path generator 130, while attempting to navigate to the high-level waypoint 210 of a corresponding navigation route 112, may slide down an obstacle or surface 220 and get stuck in a local minimum 230 (FIG. 2A). In another example, the low-level path generator 130 may lack the necessary context or decision-making ability regarding turning the robot 10. That is, the low-level path generator 130 may struggle to differentiate when to “turn then drive” versus “drive then turn” (FIG. 2B).

[0046] Referring now to FIG. 3, adding an additional waypoint (i.e., an intermediate waypoint 310) to the navigation route 112 aids the low-level path generator 130 in making proper topological decisions as the additional waypoint(s) 310 may make the trajectory appear convex to the low-level path generator 130 and allow the low-level path generator to successfully navigate around the obstacle 220. The intermediate waypoint generator 120 may ensure any added intermediate waypoints 310 added to the navigation route 112 are of sufficient distance from the robot 10 to minimize the effect of map jitter. Furthermore, the intermediate waypoint generator 120 may refrain from removing or deleting any high-level waypoints 210 as the high-level waypoint generator 110 may be privy to additional map context unavailable to the intermediate waypoint generator 120 and removing a high-level waypoint 210 may yield unpredictable results.

[0047] Referring now to FIG. 4, in some implementations, the intermediate waypoint generator 120 includes a sparse graph generator 410, a coarse path planner 420, and a waypoint placer 430. The sparse graph generator 410 receives a body obstacle map 412 from, for example, the perception system 102. The body obstacle map 412 is a map of obstacles (e.g., obstacles that the body 11 of the robot 10 cannot traverse) in the immediate vicinity of the robot 10 (e.g., within four meters). From the body obstacle map 412, the sparse graph generator 410 generates a sparse graph 416S. As discussed in more detail below, the sparse graph 416S provides a list of valid interconnections between nodes 812 (FIGS. 8A-8E) and edges 810 (FIGS. 8A-8E). The nodes 812 and edges 810 represent valid potential paths through yaw restricted zones (i.e., areas of difficult or tight maneuvering) near the robot 10 and thus the sparse graph 416S provides a the information necessary to determine potential paths for the robot 10 through the yaw restricted zones.

[0048] The sparse graph generator 410 passes the sparse graph 416S to the coarse path planner 420. The coarse path planner 420 plots a coarse path 1310 (FIG. 13) using the sparse graph 416S from a starting location to a goal destination. In some examples, the coarse path planner 420 plots the coarse path 1310 by using a search algorithm (e.g., A\*) to determine the most optimal route of the valid potential paths indicated by the sparse graph 416S (i.e., the list of

interconnections between nodes **812** and edges **810**). The coarse path planner **420** may pass the path **1310** to the waypoint placer **430**. The waypoint placer **430** determines, from the current location of the robot **10**, where line-of-sight is lost when following the path **1310** and places an intermediate waypoint **310** at that location. That is, the waypoint placer **430** determines the location, if the robot **10** looks along the coarse path **1310** from the current location, where the robot **10** would lose line-of-sight of the path (e.g., because of an obstacle) and places the intermediate waypoint **310** at the location on the path **1310** where line-of-sight was lost. The intermediate waypoint **310** will guide the robot **10** to a location where the low-level path generator **130** can successfully navigate the obstacle. The intermediate waypoint(s) **310** are included with the navigation route **112** and passed to the low-level path generator **130**.

[0049] In some implementations, the sparse graph generator **410** initially generates a full configuration space map **414** based on the received body obstacle map **412**. In some examples, the full configuration space map **414** includes a two-dimensional (2D) grid or array of elements **510**, **510a-n**, where each element **510** represents an area of the environment **8** (e.g., a three centimeter by three centimeter square) that indicates whether or not an obstacle prevents the robot **10** from entering the particular element **510**. Optionally, the full configuration space map **414** is an array of 128 elements by 128 elements. In some examples, each element **510** may be associated with a number of respective yaw configurations **512**, **512a-n** (respective set of yaw configuration **512**, **512a-n**) and the full configuration space map **414** may indicate a status for each of the respective yaw configurations **512** for each element **510**. For example, each element **510** may be associated with **64** respective yaw configurations. In this example, each yaw configuration would be rotated 5.625-degrees from the previous configuration, as 360-degrees (i.e., a full circle) divided by 64 (i.e., the number of yaw configurations) is equal to 5.625 degrees. The full configuration space map **414** may indicate, for each respective yaw configuration **512** associated with a respective element **510**, whether or not the respective yaw configuration **512** will result in a collision with a body obstacle if a select point of the robot **10** occupies the space represented by the element **510**. That is, the full configuration space map **414** may indicate if each yaw configuration **512** is valid (i.e., the robot **10**, in that yaw configuration **512** would not collide with an obstacle) or is invalid (i.e., the robot **10**, in that yaw configuration **512**, would collide with an obstacle). The select point may, for example, include a center point of the body **11** of the robot **10** (e.g., equidistance from the top of each leg **12**).

[0050] In some implementations, the sparse graph generator **410** generates a compressed configuration space map **500** from the full configuration space map **414**. The compressed configuration space map **500** may categorize each element **510** of the configuration space map **500** instead of associating each element with a number of yaw configurations **512**. For example, each element **510** may be categorized as a body obstacle element **510A** (FIG. 5), a yaw collision element **510B** (FIG. 5), a yaw free element **510C** (FIG. 5), or a yaw constrained element **510D** (FIG. 5). That is, the yaw configurations **512** from the full configuration space map **414** may be used to categorize each element **510** of the compressed configuration space map **500**.

[0051] Referring now to FIG. 5, an exemplary compressed configuration space map **500** is illustrated. In this example, the compressed configuration space map **500** includes a grid of 128 by 128 elements **510**, each categorized as a body obstacle element **510A**, a yaw collision element **510B**, a yaw free element **510C**, or a yaw constrained element **510D**. The body obstacle elements **510A** represent elements occupied by an obstacle that the robot **10** cannot traverse (i.e., the obstacles received from the body obstacle map **412**). For example, a chair, box, or a wall that the robot **10** must avoid may be categorized as a body obstacle element **510A**. Yaw collision elements **510B** are elements where all yaw configurations **512** for the robot **10** (e.g., all 64 yaw configurations) result in a collision with a body obstacle (i.e., a body obstacle element **510A**) when the select point (e.g., the center of the body **11**) of the robot **10** occupies the space represented by the element **510B**. For example, a space immediately next to a wall, despite not actually containing the wall, may be too close to the wall for the robot **10** to stand without colliding with the wall.

[0052] The yaw free elements **510C** are the opposite of the yaw collision elements **510B** in that no yaw configurations **512** will result in a collision with a body obstacle. Put another way, a yaw free element **510C** represents an area in the environment **8** where the robot **10** may spin through all yaw configurations **512** (i.e., spin 360 degrees with a center of axis at the select point) without colliding with a body obstacle. The yaw constrained elements **510D** are elements where some yaw configurations **512** are safe or valid (i.e., the robot **10** will not collide with an obstacle) and some yaw configurations **512** are not safe (i.e., invalid yaw configurations **512** where the robot **10**, in those yaw configurations **512**, will collide with an obstacle). For example, the robot **10** may be able to travel next to and parallel to a wall, but turning 90 degrees may cause a collision with a wall. In this example, some yaw configurations **512** (i.e., the yaw configurations **512** where the robot **10** is parallel with the wall) are safe while other (i.e., the yaw configurations **512** where the robot **10** is perpendicular with the wall) are not safe.

[0053] The sparse graph generator **410**, in some examples, determines valid paths through yaw constrained zones **510DZ** (i.e., a zone of yaw constrained elements **510D**) of the compressed configuration space map **500**. Referring now to FIG. 6, in some implementations, the sparse graph generator **410** overlays the compressed configuration space map **500** with a plurality of Voronoi cells **610**. The Voronoi cells **610** include all elements **510** in yaw constrained zones **510DZ** and/or yaw free zones **510CZ** that are equidistant from at least two elements **510** categorized as yaw collision elements **510B**. Put another way, the Voronoi cells **610** are elements **510** that are the furthest from yaw collision zones **510BZ** (and therefore furthest from the body obstacles). Alternatively, the Voronoi cells **610** include all elements **510** in yaw constrained zones **510DZ** and/or yaw free zones **510CZ** that are equidistant from at least two body obstacle elements **510A**. In the example of FIG. 6, the cells **610** are centered in the yaw free zones **510CZ** and yaw constrained zones **510DZ** between the yaw collision zones **510BZ**. The Voronoi cells **610** are simple to compute from data that the robot **10** may already have access to (e.g., a signed distance field).

[0054] To determine the elements **510** to mark as Voronoi cells **610**, the sparse graph generator **410** determines the elements **510** (of the configuration space map **500**) that are

equidistant from obstacles (i.e., body obstacle elements **510A**) on the configuration space map **500**. That is, each element **510** inherently has a distance and direction to a nearest obstacle boundary. FIG. 7 depicts a portion of the configuration space map **500** including two yaw collision zones **510BZ** separated by a yaw constrained zone **510DZ**. A few Voronoi cells **610** run through the yaw constrained zone **510DZ** and between the yaw collision zones **510BZ**. In some examples, the sparse graph generator analyzes each element **510** of the configuration space map **500** to determine if the element **510** should be marked as a Voronoi cell **610**. When analyzing each element **510** to determine if the element **510** is a Voronoi cell **610**, in some implementations, the sparse graph generator **410** determines if an element **510** (i.e., the element **510** currently being analyzed) and a neighboring element **510** point to substantially different locations as the nearest obstacle boundary. That is, for every element **510** in the configuration space map **500**, the sparse graph generator **410** may locate the nearest obstacle boundary to the respective element, the nearest obstacle boundary of the bottom neighbor of the respective element, and the nearest obstacle boundary of the right-hand neighbor of the respective element. Whenever the distance between any two of the three nearest obstacle boundaries satisfies a threshold distance, the element **510** may be marked as a Voronoi cell **610**. The threshold distance may be expressed as any number of elements (e.g., one element, two elements, five elements, etc.).

**[0055]** In the example shown, when the sparse graph generator **410** analyzes the element **510** labeled 'A', the sparse graph generator **410** determines that the nearest yaw collision element **510B** (or body obstacle element **510A**) to element 'A' is element **510a**. The sparse graph generator **410** then determines the nearest yaw collision element **510B** to the right-hand neighbor of the element (labeled 'B'), which in this case is element **510b**. The sparse graph generator **410** may then determine the distance from the bottom neighbor of the element (labeled 'C') and the nearest yaw collision element **510B** (which, in this case, is again element **510a**). The sparse graph generator **410** may determine if, in some examples, two out of the three nearest obstacle boundaries are within a threshold distance apart (i.e., two of the three of the distances between 'A' and 'B', 'A' and 'C', and 'B' and 'C'). When an element has two obstacle boundaries the same distance apart, the sparse graph generator **410** may determine the distances between both elements.

**[0056]** In this example, the distance between the nearest obstacle boundaries of 'A' and 'B' is ten elements, the distance between the nearest obstacle boundaries of 'A' and 'C' is zero elements (i.e., they share the same nearest obstacle boundary) and the distance between the nearest obstacle boundaries of 'B' and 'C' is again ten elements. When the threshold distance is less than ten elements, element 'A' will be marked as a Voronoi cell **610**.

**[0057]** As previously discussed, the sparse graph generator may **410** make a similar analysis for each element of the configuration space map **500**. With continued reference to FIG. 7, the sparse graph generator **410** may not mark element 'D' as a Voronoi cell **610**, as the three nearest obstacle distances with its right-hand neighbor ('E') and bottom neighbor ('F') do not satisfy the threshold (e.g., three elements). This is because the distance between the nearest obstacle boundaries (i.e., elements **510c**, **510d**) is only one element, which may not satisfy the threshold.

**[0058]** Referring now to FIGS. 8A-8E, the sparse graph generator **410**, in some implementations, determines edges **810** and nodes **812** derived from the Voronoi cells **610**. FIG. 8A illustrates exemplary Voronoi cells **610** in a yaw constrained zone **510DZ**. The sparse graph generator, in some implementations, selects an arbitrary (i.e., random or near random) element **510ff** marked as a Voronoi cell **610**. Starting from the arbitrary element **510ff**, the sparse graph generator performs a flood fill and records a distance from each element **510** marked as a Voronoi cell **610** to the arbitrarily selected element **510ff**. In the example shown, each element is labeled with the distance (in elements) from the arbitrary element **510ff**. Flood fill is an algorithm that determines an area that is connected to a given node in an array. In this case, the flood fill continues to flow through all elements **510** marked as Voronoi cells **610** until all are assigned a distance. While the arbitrarily selected element **510ff** may be selected entirely at random, it may be advantageous to limit the selection to elements **510** within the vicinity of the robot **10** in order to minimize effects from any error.

**[0059]** After each element marked as a Voronoi cell **610** is assigned a distance, the sparse graph generator **410**, in some examples, determines an end or end node **812** of each branch of Voronoi cells **610**. The end node **812** of each branch will have locally the largest distance from the arbitrarily selected element **510ff**. From the end node **812** of a branch, the sparse graph generator **410**, in some examples, marks each element **510** while traveling back toward the selected element **510ff**. Each time the sparse graph generator **410** encounters an element **510** already previously marked, the generator may attach a unique label to the combination to the element. For example, in FIG. 8B, the sparse graph generator **410** starts at the end node **812a** and travels back toward the selected element **510ff**, marking each element along the way to form an edge **810a**. That is, the Voronoi cells **610** from the end node **812a** to the selected element **510ff** may form the edge **810a**. The sparse graph generator **410** may continue this process until all elements have been marked. For examples, in FIG. 8C, the sparse graph generator **410** travels from the end node **812b** toward the element **510ff** and marks each element to form another edge **810b** until a previously marked element is encountered (FIG. 8B) at **812c**. The sparse graph generator **410** may assign a unique label to the junction element at **812c** (i.e., the first element encountered that had been previously marked). The sparse graph generator **410** may continue travelling back until arriving at the selected element **510ff**, noting each element that was previously marked as a separate edge **810c**.

**[0060]** Referring now to FIG. 8D, the sparse graph generator **410** may start from the end node **812d** and travel back to the element **510ff**, again marking each element along the way to form another edge **810d**. After all elements **510** have been marked (and assigned to an edge **810**), the sparse graph generator **410**, in some implementations, determines if the selected element **510ff** only touches two edges **810** (i.e., is not a junction between three or more edges). In this scenario, the sparse graph generator **410** may combine the two edges into a single edge. For example, as illustrated in FIG. 8D, the selected element **510ff** only touches two other edges (i.e., edge **810c** and edge **810d**) and in FIG. 8E, the edge **810c** and the edge **810d** are combined into a single edge **810**. The end result of the flood fill and element marking provides the sparse graph generator **410** with an ordered set of elements

**510** along edges **810** and a list of node elements **812**. The list of nodes and edges form the sparse graph **416S** and represent valid paths the robot **10** may travel through the constrained spaces of the nearby environment (i.e., the yaw constrained zones **510DZ** of the compressed configuration space map **500**)

[0061] FIG. 9 illustrates a configuration space map **500** overlaid with the Voronoi cells **610** categorized into a number of edges **810** and nodes **812**, each edge **810** connecting either to another edge **810** (through a node **812**) or to a yaw free zone **510CZ** (also through a node **812**). The sparse graph generator **410**, when generating the sparse graph **416S**, in some implementations, only considers elements **510** marked as Voronoi cells **610** that are located in yaw constrained zones **510DZ**, as the path through yaw free zones **510CZ** may be determined at a later point. The sparse graph generator **410**, as discussed with regards to FIGS. 8A-8E, may segment the elements marked as Voronoi cells **610** into individual edges **810** and nodes **812**. In some examples, the sparse graph generator **410** labels or identifies nodes **812** where the edges **810** connect to yaw free zones **510CZ**. That is, the sparse graph generator **410** identifies nodes **812** (i.e., the ends or edges **810** or junctions between edges **810**) along Voronoi cells **610** that connect yaw free zones **510CZ** and yaw constrained zones **510DZ**. The sparse graph generator **410** may further identify nodes **812** that are a junction for multiple edges **810**. In some examples, the sparse graph generator **410** assumes that all nodes **812** that connect to the same yaw free zone **510CZ** are connected to each other. That is, the sparse graph generator may (at least temporarily) ignore motion through yaw free zones **510CZ** as long as a path between the nodes **812** exists (i.e., connected to the same yaw free zone **510CZ**). Armed with the edges **810** and nodes **812**, the sparse graph generator **410** may first generate a final 2D configuration map **1000** (FIG. 10) based on the previously determined edges **810** and nodes **812** in the compressed configuration space map **500** overlaid with Voronoi cells **610** by pruning off edges **810** that fail to have navigational significance. For example, FIG. 10 shows a compressed configuration space map **500** overlaid with a plurality of Voronoi cells **610** and having a number of insignificant edges **1010** that are pruned to generate the final 2D configuration map **1000**. That is, the sparse graph generator **410**, in some implementations, prunes insignificant edges **1010** that are shorter than a threshold length and terminate or end within a yaw constrained zone **510DZ**, as these paths are highly unlikely to be worthwhile for the robot **10** to traverse. Optionally, the threshold length may be approximately the radius of the robot **10**. In some examples, the sparse graph generator **410** combines edges **810** together when, after pruning, a junction node **812** is connected to less than three edges **810**.

[0062] Referring now to FIGS. 11A and 11B, the sparse graph generator **410**, in some implementations, converts the final 2D configuration map **1000** (FIG. 11A) into an SE2 representation **1100** of the map (FIG. 11B). SE2 is a coordinate system that includes yaw with standard Cartesian coordinates (i.e., an x coordinate, a y coordinate, and yaw). That is, the SE2 map **1100** takes the final 2D configuration map **1000** and includes yaw. FIG. 11B illustrates an SE2 map **1100** where the yaw is the height. While the robot **10** may have any number of yaw configurations **512** (e.g., **64** as previously discussed), the SE2 map **1100** may be simplified by only considering two yaw configuration—forward and

backward. That is, generally, the robot **10** will travel in a yaw configuration **512** that aligns with its path of travel, and thus the SE2 map **1100** may be greatly simplified by only accounting for these two yaw configurations. Each edge **810** of the 2D map **1000** may be represented by two SE2 edges with opposite tangents (i.e., “forward” and “backward” yaw configurations) **1110a**, **1110b**. Each 2D node **812** (FIG. 11A) is represented by two times the number of edges **1110** (FIG. 11B) connected to the node **812** in the 2D map **1000** representation. For example, FIG. 11A illustrates three edges **810** connected at a single node **812**, which translates to six nodes **1112** in the SE2 map **1100**. It is implied that the robot **10** will rotate in place at the nodes **1112** and the sparse graph generator **410** may determine the interconnection between the nodes **1112** based on the valid yaw configurations **512** from the full configuration space map **414**.

[0063] To finalize the SE2 map **1100**, in some implementations, the sparse graph generator **410** determines an entry and exit point from the map **1100** for the robot **10**. Referring now to FIGS. 12A and 12B, the sparse graph generator **410** may project an off-map goal **1210** (i.e., a target destination) along a straight line to the map **1100** boundary. When the goal **1210** is set in a yaw free zone **510CZ**, the sparse graph generator **410** may use the respective element associated with the goal **1210**. However, when in a yaw constrained zone **510DZ**, the sparse graph generator **410** may search along the nearest element **510** that is marked as a Voronoi cell **610** (from the 2D map **1000**) or a yaw free zone **510CZ** boundary. If the nearest element is on a yaw free zone **510CZ** boundary, the sparse graph generator **410** may set that element as the goal. When the nearest element is on an edge **810** is marked as a Voronoi cell **610**, the sparse graph generator **410** may split the edge **810** in two by placing a new node **1220** at the respective nearest element. In the illustrated example of FIG. 12A, a goal **1210** is set in a yaw constrained zone **510DZ**. The sparse graph generator determines that the nearest desired element is a Voronoi cell **610**. The sparse graph generator **410** creates a new node **1220** at the element nearest the goal **1210** and separates the previous edge **810** into two separate edges **810**. In some implementations, the sparse graph generator **410** creates two new nodes **1220**, with one node **1220** representing the forward yaw configuration **512** and one node **1220** representing the backward yaw configuration **512**.

[0064] Once the new nodes **1220** have been placed, the sparse graph generator **410** determines if a starting position of the robot **10** (e.g., the current location of the robot) is connected the forward yaw configuration node **1220**, the backward yaw configuration node **1220**, or both. That is, the sparse graph generator **410** determines if the robot **10** is capable of connecting to the nodes **1220** with the respective yaw configuration. The sparse graph generator **410**, in some examples, determines an angle **1222** between the original or true goal **1210** and the two yaw configurations of the edge **810** along the new node **1220** (i.e., forward and backward). In the example shown in FIG. 12B, when the angle satisfies a threshold (e.g., when the angle is within zone **1230**), the forward-facing node **1220** is connected to the robot's location. When the angle satisfies a second threshold (e.g., when the angle is within zone **1240**), the backward-facing node **1220** is connected to the robot's location. When the angle satisfies a third threshold (e.g., when the angle is within zones **1250**), both the forward-facing node **1220** and the backward-facing node **1220** are connected to the robot's

starting location. That is, the robot **10** could travel to the location of the nodes **1220** facing either forward or backward.

**[0065]** In some examples, the sparse graph generator **410** connects nodes **812** that indicate the robot **10** will collide with an obstacle. For example, the sparse graph generator **410** may always assume that the robot turns by rotating from a center point, which may make some turns impossible. However, in some situations, the low-level path generator **130** may still be able to navigate the path by turning on a pivot point that is not at the center of the robot **10**, and in these situations, the sparse graph generator **410** may create edges **810** between nodes **812** that the generator **120** may otherwise determine the robot incapable of traversing.

**[0066]** Referring back to FIG. 4, the intermediate waypoint generator **120** also includes the coarse path planner **420** configured to receive the sparse graph **416S** from the sparse graph generator **410** and determine a topologically correct path (i.e., a coarse path **1310**) for the robot **10** to travel to reach the goal **1210**, i.e., the node **1220** (FIG. 12A) corresponding to the target destination. In some implementations, the coarse path planner **420** also receives the full configuration space map **414** and/or the compressed configuration space map **500**. Referring now to FIGS. 4 and 13, the map **1100** includes a coarse path **1310** that navigates from a start point **1320**, in a yaw free zone **510CZ**, through a yaw constrained zone **510DZ** to another yaw free zone **510CZ**.

**[0067]** To generate the path **1310**, the coarse path planner **420** may implement a search algorithm (e.g., an A\* search algorithm). The coarse path planner **420** may use the search algorithm to search a dense grid or graph **416D** of the 2D yaw free zones **510CZ** to plot the path **1310**. The sparse graph generator **410** may also generate the dense graph **416D** and combine it with the sparse graph **416S** and send the combined graph to the coarse path planner **420**. Alternatively, the coarse path planner may generate that dense graph **416D**. The dense graph is a list of interconnected nodes of yaw free zones **510CZ** determined from the compressed configuration space map **500**. That is, like the sparse graph **416S** includes a list of interconnected nodes **812** of elements **510** within yaw constrained zones **510DZ**, the dense graph **416D** includes a list of interconnected nodes of elements **510** within yaw free zones **510CZ**. As the yaw free space has no need for orientation (i.e., yaw) information because the robot **10** may spin freely in yaw free zones **510CZ**, the coarse path planner **420** may search the dense graph **416D** (dense relative to the sparse graph **416S**). The coarse path planner **420** may combine the sparse graph **416S** and the dense graph **416D** to form a final graph **416F**. The final graph **416F** includes all interconnected nodes within both the yaw free zones **510CZ** and the yaw constrained zones **510DZ**. The coarse path planner **420** may also use the search algorithm to search the final graph **416F** for the Voronoi cells **610** in yaw constrained zones **510DZ** with the included orientation information and the yaw free zones **510CZ**. The coarse path planner **420** may link the yaw free zone **510CZ** with the yaw constrained zone **510DZ** and traverse the yaw constrained zone **510DZ** with the coarse path **1310**.

**[0068]** Because the dense graph **416D** lacks orientation information (and thus the final graph **416F** lacks orientation information in the yaw free zones **510CZ**), the coarse path planner **420**, in some implementations, determines whether

any orientation (i.e., forward or backward) for any edges **810** should be reversed. Optionally, the coarse path planner **420** is biased to walk forward facing along an edge **810**. The coarse path planner **420** may identify segments of the path **1310** that are capable of having the yaw orientation reversed (i.e., both forward and backward orientations are valid). The coarse path planner **420** may then calculate a cost (i.e., an amount of rotation required) of traversing the path **1310**.

**[0069]** For example, referring now to the map **1100** of FIG. 14, the coarse path planner **420** has planned a path **1430** from a start location **1410** (with an orientation that aligns with the respective arrow) to a goal location **1420** (with an orientation that aligns with the respective arrow). Due to the forward bias, the search algorithm may choose a forward facing orientation (path A-C) through the yaw constrained zone **510DZ**. The coarse path planner **420**, optionally, computes a cost for both path A-C (facing forward) and path B-D (facing backward). In the given example, because the given start and goal orientations face backward, a backward path of B-D is cheaper (i.e., requires less rotation) than the forward facing path A-C and the coarse path planner **420** may update the path **1430** accordingly.

**[0070]** Referring back to FIG. 4, the intermediate waypoint generator **120**, in some implementations, also includes a waypoint placer **430**. The waypoint placer **430** receives the full configuration space map **414** and the sparse graph **416S** with the path **1310** from the coarse path planner **420**. The waypoint placer **430** processes the path **1310** for appropriate locations to place intermediate waypoints **310**. The waypoint placer **430**, in some examples, searches along the path **1310** until line-of-sight is first lost (e.g., because of an obstacle) and places a waypoint **310** at that location. Optionally, the waypoint placer **430** downsamples the path **1310** prior to searching to reduce processing time.

**[0071]** Referring now to FIG. 15A, a robot **10** navigates along a path **1310** through a yaw constrained zone **510DZ** that lies between two body obstacle zones **510AZ**. The waypoint placer **430** draws rays **1510** from the current location of the robot **10** to various points along the path **1310**. When one of the rays **1510** intersects a portion of the body obstacle zone **510AZ** (or, alternatively, within a threshold distance of the body obstacle zone **510AZ** to account for a width of the robot **10**), the waypoint placer **430** places an intermediate waypoint **310** at the point **1530** on the path **1310** where the ray **1510** intersects the path **1310** at or just before line of sight is lost. Thus, determining the location that line-of-sight is lost is relatively straightforward in Cartesian coordinates (i.e., x and y coordinates). However, determining line-of-sight in SE2 space (i.e., including yaw) is more complicated.

**[0072]** Referring to FIG. 15B, to address the inclusion of yaw, the waypoint placer **430** may, at each point along the downsampled path **1310**, determine a minimum allowable yaw and a maximum allowable yaw to generate an envelope **1550**, **1550a-n**. The waypoint placer **430**, in some examples, tracks the smallest (i.e., the innermost) envelope **1560**, **1560a-n** at each downsampled point and places an intermediate waypoint **310** when either the envelope width drops below an envelope threshold or the required yaw configuration at the point **1530** on the path **1310** is outside the envelope **1550**. In the example shown, the yaw of the envelope **1550c** is outside the inner envelope **1560c** and a candidate for an intermediate waypoint **310**.

[0073] In some examples, the waypoint placer 430 also adds an intermediate waypoint 310 when moving from a yaw free zone 510CZ to a yaw constrained zone 510DZ if orientation changes by more than a threshold amount (e.g., 60 degrees). Optionally, the waypoint placer 430 may add an intermediate waypoint 310 at the end of the path 1310 when the orientation at the goal (i.e., a goal pose) is off the current map (i.e., too far from the robot's current location) and line-of-sight to the goal is lost. Additionally, the waypoint placer 430 may shift waypoints away from junctions in narrow spaces. For example, an intermediate waypoint 310 may be projected down the path 1310 until outside a threshold radius around the junction.

[0074] High-level waypoints 210 may include two coordinates indicating a position on a plane (i.e., x and y coordinates), a yaw value, and a time value. The time value may indicate an estimated amount of time for the robot to navigate to the respective waypoint 310. Along with the x, y, and yaw values, the waypoint placer 430 may similarly add an estimated time value to the intermediate waypoints 310. The estimated time value may be determined by taking the maximum amount of time from the starting location to the waypoint in x, y, and yaw using any speed limits received. The waypoint placer 430 may offset the time for each high-level waypoint 210 on the planned trajectory after the intermediate waypoint 310.

[0075] Referring back to FIG. 4, the waypoint placer 430 adds any intermediate waypoints 310 to the high-level waypoints 210 of the navigation route 112. The intermediate waypoint generator passes the navigation route 112 to the low-level path generator 130 to generate the step plan 142 to navigate to each waypoint 210, 310. In scenarios where the intermediate waypoint generator 120 determines an intermediate waypoint 310 is not necessary (or fails to find an adequate location), the intermediate waypoint generator 120 may pass the received navigation route 112 unaltered to the low-level path generator 130.

[0076] FIG. 16 is a flowchart of an exemplary arrangement of operations for a method 1600 for generating intermediate waypoints 310 for a robot 10. At operation 1602, the method 1600 includes receiving, at data processing hardware 36 of a robot 10, a navigation route 112. The navigation route 112 includes a series of high-level waypoints 210 that begin at a starting location 113 and end at a destination location 114. The navigation route 112 is based on the high-level navigation data 50 that is representative of locations of static obstacles in an area the robot 10 is to navigate.

[0077] The method 1600 includes, at operation 1604, receiving, at the data processing hardware 36, image data 17 of an environment 8 about the robot 10 from an image sensor 31. At operation 1606, the method 1600 includes generating, by the data processing hardware 36, at least one intermediate waypoint 310 based on the image data 17 and, at operation 1608, adding, by the data processing hardware 36, the at least one intermediate waypoint 310 to the series of high-level waypoints 210 of the navigation route 112. At operation 1610, the method 1600 includes navigating, by the data processing hardware 36, the robot 10 from the starting location 113 along the series of high-level waypoints 210 and the at least one intermediate waypoint 310 toward the destination location 114.

[0078] FIG. 17 is schematic view of an example computing device 1700 that may be used to implement the systems and methods described in this document (e.g., data process-

ing hardware 36 and memory hardware 20). The components shown here, their connections and relationships, and their functions, are meant to be exemplary only, and are not meant to limit implementations of the inventions described and/or claimed in this document.

[0079] The computing device 1700 includes a processor 1710 (e.g., data processing hardware 36), memory 1720 (e.g., memory hardware 38), a storage device 1730, a high-speed interface/controller 1740 connecting to the memory 1720 and high-speed expansion ports 1750, and a low speed interface/controller 1760 connecting to a low speed bus 1770 and a storage device 1730. Each of the components 1710, 1720, 1730, 1740, 1750, and 1760, are interconnected using various busses, and may be mounted on a common motherboard or in other manners as appropriate. The processor 1710 (e.g., data processing hardware) can process instructions for execution within the computing device 1700, including instructions stored in the memory 1720 or on the storage device 1730 to display graphical information for a graphical user interface (GUI) on an external input/output device, such as display 1780 coupled to high speed interface 1740. In other implementations, multiple processors and/or multiple buses may be used, as appropriate, along with multiple memories and types of memory. Also, multiple computing devices 1700 may be connected, with each device providing portions of the necessary operations (e.g., as a server bank, a group of blade servers, or a multi-processor system). The processor 1710 may execute the intermediate waypoint generator 120 of FIGS. 1 and 4.

[0080] The memory 1720 stores information non-transitorily within the computing device 1700. The memory 1720 may be a computer-readable medium, a volatile memory unit(s), or non-volatile memory unit(s). The non-transitory memory 1720 may be physical devices used to store programs (e.g., sequences of instructions) or data (e.g., program state information) on a temporary or permanent basis for use by the computing device 1700. Examples of non-volatile memory include, but are not limited to, flash memory and read-only memory (ROM)/programmable read-only memory (PROM)/erasable programmable read-only memory (EPROM)/electronically erasable programmable read-only memory (EEPROM) (e.g., typically used for firmware, such as boot programs). Examples of volatile memory include, but are not limited to, random access memory (RAM), dynamic random access memory (DRAM), static random access memory (SRAM), phase change memory (PCM) as well as disks or tapes.

[0081] The storage device 1730 is capable of providing mass storage for the computing device 1700. In some implementations, the storage device 1730 is a computer-readable medium. In various different implementations, the storage device 1730 may be a floppy disk device, a hard disk device, an optical disk device, or a tape device, a flash memory or other similar solid state memory device, or an array of devices, including devices in a storage area network or other configurations. In additional implementations, a computer program product is tangibly embodied in an information carrier. The computer program product contains instructions that, when executed, perform one or more methods, such as those described above. The information carrier is a computer- or machine-readable medium, such as the memory 1720, the storage device 1730, or memory on processor 1710.



[0082] The high speed controller 1740 manages bandwidth-intensive operations for the computing device 1700, while the low speed controller 1760 manages lower bandwidth-intensive operations. Such allocation of duties is exemplary only. In some implementations, the high-speed controller 1740 is coupled to the memory 1720 and to the high-speed expansion ports 1750, which may accept various expansion cards (not shown). In some implementations, the low-speed controller 1760 is coupled to the storage device 1730 and a low-speed expansion port 1790. The low-speed expansion port 1790, which may include various communication ports (e.g., USB, Bluetooth, Ethernet, wireless Ethernet), may be coupled to one or more input/output devices, such as a keyboard, a pointing device, a scanner, or a networking device such as a switch or router, e.g., through a network adapter.

[0083] Various implementations of the systems and techniques described herein can be realized in digital electronic and/or optical circuitry, integrated circuitry, specially designed ASICs (application specific integrated circuits), computer hardware, firmware, software, and/or combinations thereof. These various implementations can include implementation in one or more computer programs that are executable and/or interpretable on a programmable system including at least one programmable processor, which may be special or general purpose, coupled to receive data and instructions from, and to transmit data and instructions to, a storage system, at least one input device, and at least one output device.

[0084] These computer programs (also known as programs, software, software applications or code) include machine instructions for a programmable processor, and can be implemented in a high-level procedural and/or object-oriented programming language, and/or in assembly/machine language. As used herein, the terms “machine-readable medium” and “computer-readable medium” refer to any computer program product, non-transitory computer readable medium, apparatus and/or device (e.g., magnetic discs, optical disks, memory, Programmable Logic Devices (PLDs)) used to provide machine instructions and/or data to a programmable processor, including a machine-readable medium that receives machine instructions as a machine-readable signal. The term “machine-readable signal” refers to any signal used to provide machine instructions and/or data to a programmable processor.

[0085] The processes and logic flows described in this specification can be performed by one or more programmable processors, also referred to as data processing hardware, executing one or more computer programs to perform functions by operating on input data and generating output. The processes and logic flows can also be performed by special purpose logic circuitry, e.g., an FPGA (field programmable gate array) or an ASIC (application specific integrated circuit). Processors suitable for the execution of a computer program include, by way of example, both general and special purpose microprocessors, and any one or more processors of any kind of digital computer. Generally, a processor will receive instructions and data from a read only memory or a random access memory or both. The essential elements of a computer are a processor for performing instructions and one or more memory devices for storing instructions and data. Generally, a computer will also include, or be operatively coupled to receive data from or transfer data to, or both, one or more mass storage devices

for storing data, e.g., magnetic, magneto optical disks, or optical disks. However, a computer need not have such devices. Computer readable media suitable for storing computer program instructions and data include all forms of non-volatile memory, media and memory devices, including by way of example semiconductor memory devices, e.g., EPROM, EEPROM, and flash memory devices; magnetic disks, e.g., internal hard disks or removable disks; magneto optical disks; and CD ROM and DVD-ROM disks. The processor and the memory can be supplemented by, or incorporated in, special purpose logic circuitry.

[0086] A number of implementations have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the disclosure. Accordingly, other implementations are within the scope of the following claims.

What is claimed is:

1. A method comprising:

receiving, at data processing hardware of a robot, a navigation route, the navigation route comprising a series of high-level waypoints that begin at a starting location and end at a destination location, and the navigation route based on high-level navigation data representative of locations of static obstacles in an area the robot is to navigate;

receiving, at the data processing hardware, image data of an environment about the robot from an image sensor; generating, by the data processing hardware, at least one intermediate waypoint based on the image data;

adding, by the data processing hardware, the at least one intermediate waypoint to the series of high-level waypoints of the navigation route; and

navigating, by the data processing hardware, the robot from the starting location along the series of high-level waypoints and the at least one intermediate waypoint toward the destination location.

2. The method of claim 1, wherein each high-level waypoint and each intermediate waypoint comprises two coordinates indicating a position on a plane, a yaw value, and a time value, the time value indicating an estimated amount of time for the robot to navigate to the respective waypoint.

3. The method of claim 1, further comprising maintaining, by the data processing hardware, each of the series of high-level waypoints on the navigation route.

4. The method of claim 1, further comprising receiving, at the data processing hardware, a body obstacle map, the body obstacle map comprising a map of obstacles that a body of the robot cannot traverse, and

wherein generating the at least one intermediate waypoint comprises:

generating a sparse graph based on the body obstacle map, the sparse graph comprising a list of nodes and edges, the nodes and edges representative of paths the robot may travel in the environment;

planning a coarse path from a first node from the list of nodes to a second node from the list of nodes, the first node and the second node each representative of a space in the environment;

determining a point along the coarse path where line of sight by the image sensor is lost; and

generating one of the at least one intermediate waypoint at the point where line of sight is lost.

5. The method of claim 4, wherein generating the sparse graph comprises:

generating a full configuration space map based on the body obstacle map, the full configuration space map comprising a two-dimensional grid of elements, each element of the grid representing a space of the environment, and each element of the full configuration space map comprising a respective set of yaw configurations, each yaw configuration classified as valid or invalid, wherein a valid yaw configuration represents a yaw configuration of the robot that is safe from contacting obstacles at the space associated with the respective element and an invalid yaw configuration represents a yaw configuration of the robot that is not safe from contacting obstacles at the space associated with the respective element;

generating a compressed configuration space map from the full configuration space map, the compressed configuration space map comprising a second two-dimensional grid of elements, and each element of the second grid representing a space of the environment, and each element of the second grid categorized as one of (i) a yaw collision zone, (ii) a yaw free zone, or (iii) a yaw constrained zone; and

generating the sparse graph from the compressed configuration space map.

6. The method of claim 5, wherein planning the coarse path from the first node to the second node comprises:

- generating a dense graph from the compressed configuration space map, the dense graph comprising elements categorized as yaw free zone; and
- linking edges from the sparse graph with elements from the dense graph.

7. The method of claim 6, wherein linking the edges with elements from the dense graph comprises:

- combining the sparse graph and the dense graph to generate a final graph; and
- executing an A\* search algorithm on the final graph.

8. The method of claim 5, wherein generating the sparse graph further comprises overlaying a plurality of Voronoi cells onto the compressed configuration space map, each Voronoi cell categorized as yaw constrained zone on the sparse graph, and each Voronoi cell equidistant from at least two elements categorized as yaw collision zone.

9. The method of claim 8, wherein generating the sparse graph further comprises classifying each Voronoi cell as either an edge or a node.

10. The method of claim 9, wherein classifying each Voronoi cell comprises executing a flood fill algorithm.

11. The method of claim 5, wherein planning the coarse path from the first node to the second node comprises pruning edges, each pruned edge comprising elements under a threshold length and categorized as either yaw collision zone or yaw constrained zone.

12. The method of claim 4, wherein determining the point along the coarse path where line of sight by the image sensor is lost comprises:

- determining a minimum allowable yaw and a maximum allowable yaw at each element along the planned coarse path;
- determining a smallest envelope based on the minimum allowable yaw and the maximum allowable yaw; and
- determining that a required yaw at a point on the coarse path is outside the smallest envelope.

13. The method of claim 1, further comprising sending, by the data processing hardware, the navigation route with the

high-level waypoints and the at least one intermediate waypoint to a low-level path generator.

14. The method of claim 13, further comprising:

- determining, by the data processing hardware, whether to add the at least one intermediate waypoint to the navigation route; and
- in response to determining not to add at the at least one intermediate waypoint to the navigation route, passing, by the data processing hardware, the navigation route unaltered to the low-level path generator.

15. A robot comprising:

- a body;
- legs coupled to the body and configured to maneuver the robot about an environment;
- data processing hardware in communication with the legs; and

- memory hardware in communication with the data processing hardware, the memory hardware storing instructions that when executed on the data processing hardware cause the data processing hardware to perform operations comprising:

- receiving a navigation route, the navigation route comprising a series of high-level waypoints that begin at a starting location and end at a destination location, and the navigation route based on high-level navigation data representative of locations of static obstacles in an area the robot is to navigate;

- receiving image data of an environment about the robot from an image sensor;

- generating at least one intermediate waypoint based on the image data;

- adding the at least one intermediate waypoint to the series of high-level waypoints of the navigation route; and

- navigating the robot from the starting location along the series of high-level waypoints and the at least one intermediate waypoint toward the destination location.

16. The robot of claim 15, wherein each high-level waypoint and each intermediate waypoint comprises two coordinates indicating a position on a plane, a yaw value, and a time value, the time value indicating an estimated amount of time for the robot to navigate to the respective waypoint.

17. The robot of claim 15, further comprising maintaining each of the series of high-level waypoints on the navigation route.

18. The robot of claim 15, further comprising receiving a body obstacle map, the body obstacle map comprising a map of obstacles that a body of the robot cannot traverse, and wherein generating the at least one intermediate waypoint comprises:

- generating a sparse graph based on the body obstacle map, the sparse graph comprising a list of nodes and edges, the nodes and edges representative of paths the robot may travel in the environment;

- planning a coarse path from a first node from the list of nodes to a second node from the list of nodes, the first node and the second node each representative of a space in the environment; and

- determining a point along the coarse path where line of sight by the image sensor is lost; and

- generating one of the at least one intermediate waypoint at the point where line of sight is lost.

**19.** The robot of claim **18**, wherein generating the sparse graph comprises:

generating a full configuration space map based on the body obstacle map, the full configuration space map comprising a two-dimensional grid of elements, each element of the grid representing a space of the environment, and each element of the full configuration space map comprising a respective set of yaw configurations, each yaw configuration classified as valid or invalid, wherein a valid yaw configuration represents a yaw configuration of the robot that is safe from contacting obstacles at the space associated with the respective element and an invalid yaw configuration represents a yaw configuration of the robot that is not safe from contacting obstacles at the space associated with the respective element;

generating a compressed configuration space map from the full configuration space map, the compressed configuration space map comprising a second two-dimensional grid of elements, and each element of the second grid representing a space of the environment, and each element of the second grid categorized as one of (i) a yaw collision zone, (ii) a yaw free zone, or (iii) a yaw constrained zone; and

generating the sparse graph from the compressed configuration space map.

**20.** The robot of claim **19**, wherein planning the coarse path from the first node to the second node comprises:

generating a dense graph from the compressed configuration space map, the dense graph comprising elements categorized as yaw free zone; and

linking edges from the sparse graph with elements from the dense graph.

**21.** The robot of claim **20**, wherein linking the edges with elements from the dense graph comprises:

combining the sparse graph and the dense graph to generate a final graph; and

executing an A\* search algorithm on the final graph.

**22.** The robot of claim **19**, wherein generating the sparse graph further comprises overlaying a plurality of Voronoi cells onto the compressed configuration space map, each Voronoi cell categorized as yaw constrained zone on the sparse graph, and each Voronoi cell equidistant from at least two elements categorized as yaw collision zone.

**23.** The robot of claim **22**, wherein generating the sparse graph further comprises classifying each Voronoi cell as either an edge or a node.

**24.** The robot of claim **23**, wherein classifying each Voronoi cell comprises executing a flood fill algorithm.

**25.** The robot of claim **19**, wherein planning the coarse path from the first node to the second node comprises pruning edges, each pruned edge comprising elements under a threshold length and categorized as either yaw collision zone or yaw constrained zone.

**26.** The robot of claim **18**, wherein determining the point along the coarse path where line of sight by the image sensor is lost comprises:

determining a minimum allowable yaw and a maximum allowable yaw at each element along the planned coarse path;

determining a smallest envelope based on the minimum allowable yaw and the maximum allowable yaw; and determining that a required yaw at a point on the coarse path is outside the smallest envelope.

**27.** The robot of claim **15**, further comprising sending the navigation route with the high-level waypoints and the at least one intermediate waypoint to a low-level path generator.

**28.** The robot of claim **27**, further comprising:

determining whether to add the at least one intermediate waypoint to the navigation route; and

in response to determining not to add at the at least one intermediate waypoint to the navigation route, passing the navigation route unaltered to the low-level path generator.

\* \* \* \* \*