


BGP Peering on Machine Network

cluster

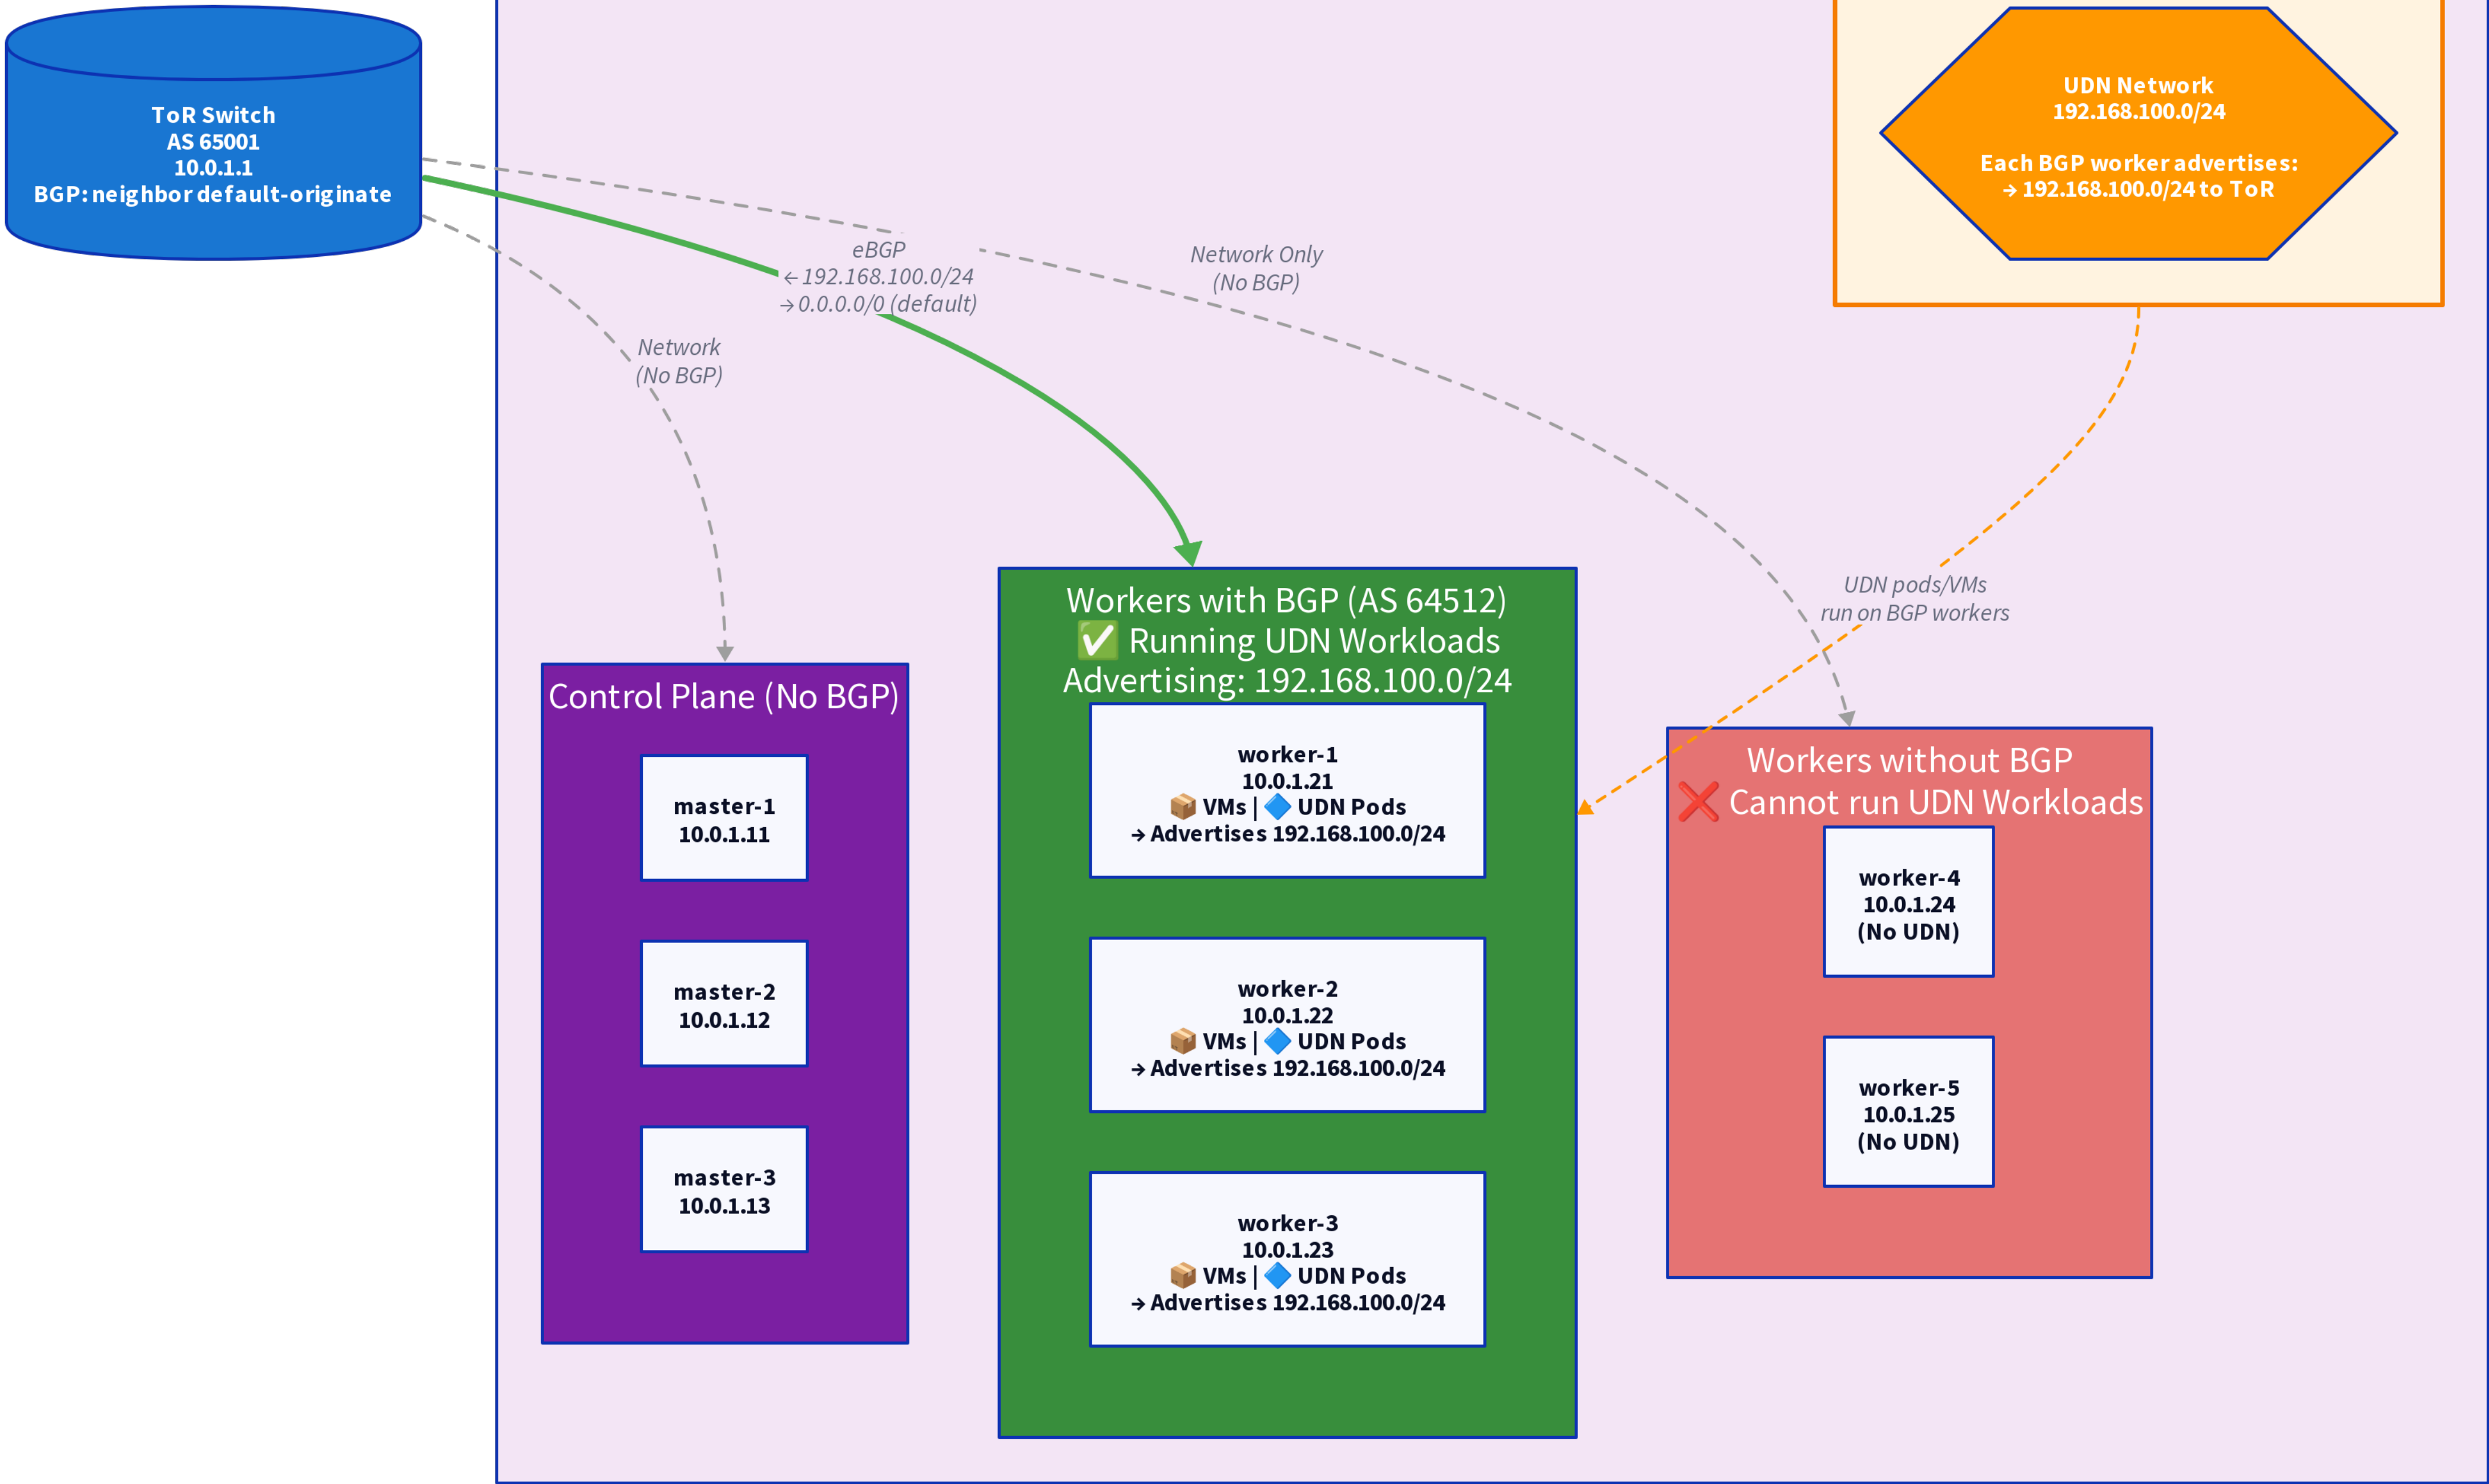

BGP Configuration

Network:

- Subnet: 10.0.1.0/24
- All nodes on same CIDR

Switch (ToR):

- AS 65001
- Config: neighbor default-originate
- Receives: 192.168.100.0/24 from each BGP worker
- Advertises: 0.0.0.0/0 (default route) to workers

OpenShift:

- Control plane: No BGP
- Workers (BGP): FRR BGP speakers (AS 64512)
- Workers (No BGP): Network only, no UDN support
- Each BGP worker advertises: 192.168.100.0/24
- Each BGP worker receives: 0.0.0.0/0 (default route)

UDN (User Defined Network):

- Network: 192.168.100.0/24
- Advertised by: All BGP-enabled workers
- ⚠️ Only runs on BGP-enabled workers
- VMs/Pods requiring UDN must be scheduled on BGP