


BGP Peering on Machine Network

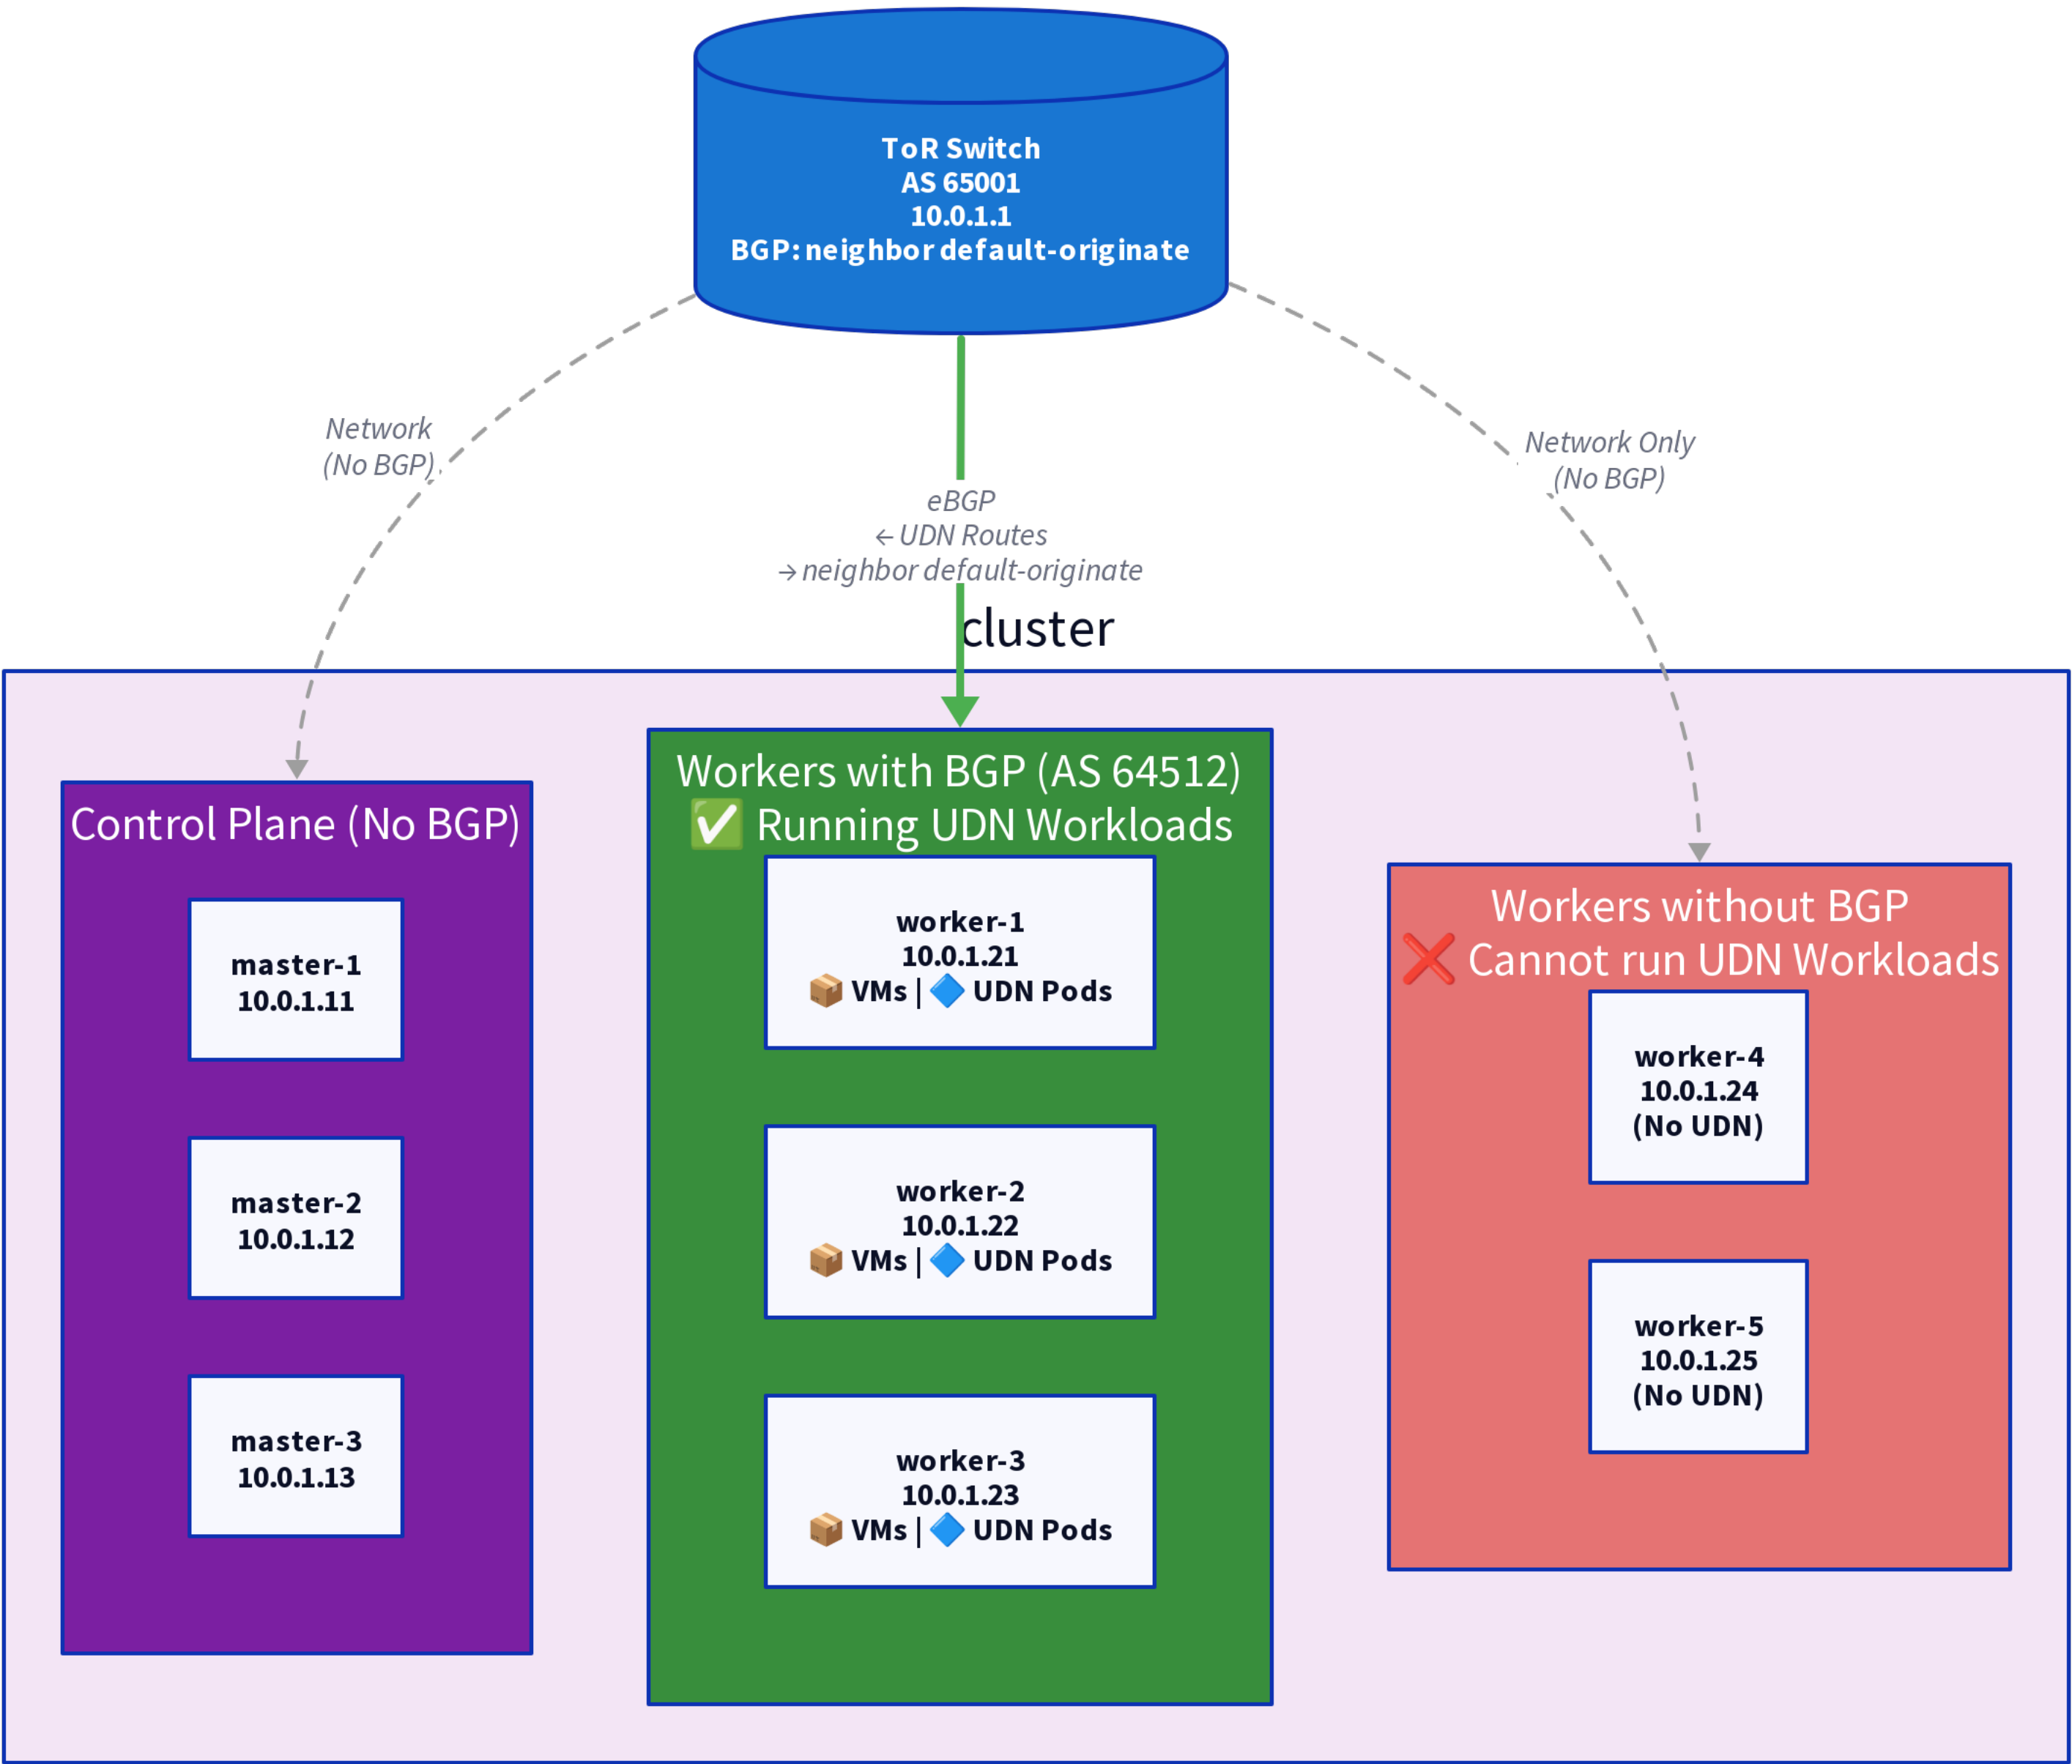

BGP Configuration

Network:

- Subnet: 10.0.1.0/24
- All nodes on same CIDR

Switch:

- AS 65001
- Config: neighbor default-originate
- Receives UDN routes from workers (←)
- Advertises default route to workers (→)

OpenShift:

- Control plane: No BGP
- Workers (BGP): FRR BGP speakers (AS 64512)
- Workers (No BGP): Network only, no UDN support
- BGP workers receive default route (neighbor default-originate)
- BGP workers advertise UDN routes to ToR switch

UDN:

- Routes advertised via BGP
- Pool: 192.168.100.0/24
- ⚠️ Only runs on BGP-enabled workers