



Electric Actuators

WE Series Weatherproof
CSA Approved TYPE 4 & 4X
500-25,900 in-lbs. torque

XE Series Explosion Proof
ATEX Certified EEx d IIB T4
690-25,900 in-lbs. torque

**AWWA
C540-93**




WE Series

The WE-500 Electric Actuator is an extremely rugged design actuator used for small ball valves (less than 2"), dampers and other quarter-turn devices. The actuator is TYPE 4, 4X and includes a visual indicator, two auxiliary switches and a compartment heater. A convenient wrench manual override shaft is standard on the WE-500. This actuator is the clear choice when a compact, efficient electric actuator is required!

FEATURES

- ▶ Compact and light due to high grade aluminum alloy housing.
- ▶ High resistance to corrosion due to hard anodizing on inside and outside with polyester powder coating on external surface
- ▶ Output torque: 530 in-lbs.
- ▶ The actuator motor is a reversible, high torque and low current design.
- ▶ Weatherproof (IP67, TYPE 4, 4X)

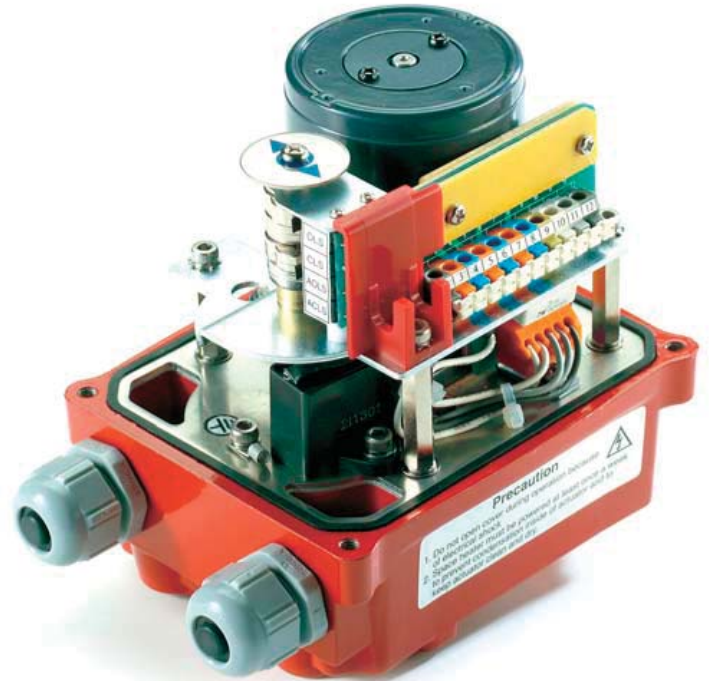

STANDARD CONFIGURATION

- ▶ Manual override
- ▶ Wide, easy mounting base standard to ISO5211 (F03/F05/F07)
- ▶ Standard four limit switches. Two for operation, 2 auxiliary dry contacts
- ▶ Captive cover bolt
- ▶ Space heater
- ▶ Limit switches for easy and tight setting
- ▶ Terminal block (11P)
- ▶ Standard color : Red



OPTION CONFIGURATION


Position Indication Unit (Potentiometer kit, PIU)

High resolution potentiometer with precisely machined gearing directly engaged with drive shaft provides continuous monitoring of position of valve and actuator.



TMC3 Electronic Modulating Card

- ▶ Auto Calibration for Easy Setup
- ▶ 10 Bit Microprocessor controller for precise positioning and control
- ▶ 4-20mA, 1-5mA, 0-10 VDC, 1-5 VDC, 0-135 Ohm or Command Signal Potentiometer
- ▶ TMC3 Can be programmed to Fail in Place, Fail CW, or Fail CCW on loss of command signal
- ▶ Characterized Control-Linear, quick opening (Square root), or Equal Percentage (Square)
- ▶ OnBoard 4-20 mA transmitter (optional)



AC/DC 24V Control Unit

Dip Switch

Mode	1	2
DC	ON	OFF
AC	OFF	ON



PERFORMANCE


TYPE (MODEL)	MAXIMUM OUTPUT TORQUE	OPERATING TIME 60/50Hz	MOUNTING SIZE	FULL LOAD AMPS			LOCKED ROTOR AMPS			DUTY CYCLE	NUMBER OF HANDLE TURN	WEIGHT
				AC 1PH. 50/60Hz		AC/DC	AC 1PH. 50/60Hz		AC/DC			
	In-lbs.	90°	ISO5211	110V	220V	24V	110V	220V	24V	S2	N	Lbs.
WE-500	530	12/14	FO3/F05/F07	0.4	0.2	0.8	0.5	0.25	2.5	70%	8	6.61

STANDARD SPECIFICATION

Enclosure	Weatherproof enclosure IP67, TYPE 4, 4X
Power supply	110/220V AC 1PH, 50/60Hz, $\pm 10\%$, 24V AC/DC
Duty cycle	70%
Motor	Class F Reversible motor
Limit switches	Open/Close, SPDT, 5A 125 VAC, 3A 250 VAC, 0.4A 125 VDC, 0.2A 250 VDC
Additional limit switches	Open/Close, SPDT, 5A 125 VAC, 3A 250 VAC, 0.4A 125 VDC, 0.2A 250 VDC
Space heater	2W (110/220V AC) Anti-condensation
Manual override	Drive Nut (hexagon design)
Cable conduit	Two 1/2" NPT
Movement angle	320° $\pm 10^\circ$
Ambient temperature	-4°F - 158°F (optional -40° Low Temp Kit)
External coating	Polyester powder coating

OPTION SPECIFICATION

Potentiometer unit (1K)
(TMC) Electronic Modulating Card
4-20mA, 1-5mA, 0-10 VDC, 1-5 VDC,
0-135 Ohm Command Signal
Current position transmitter
(Output 4~20mA DC)
Multi(24VAC/DC)
DC motor (24VDC)
Local control unit
-remote/local
-open/stop/close

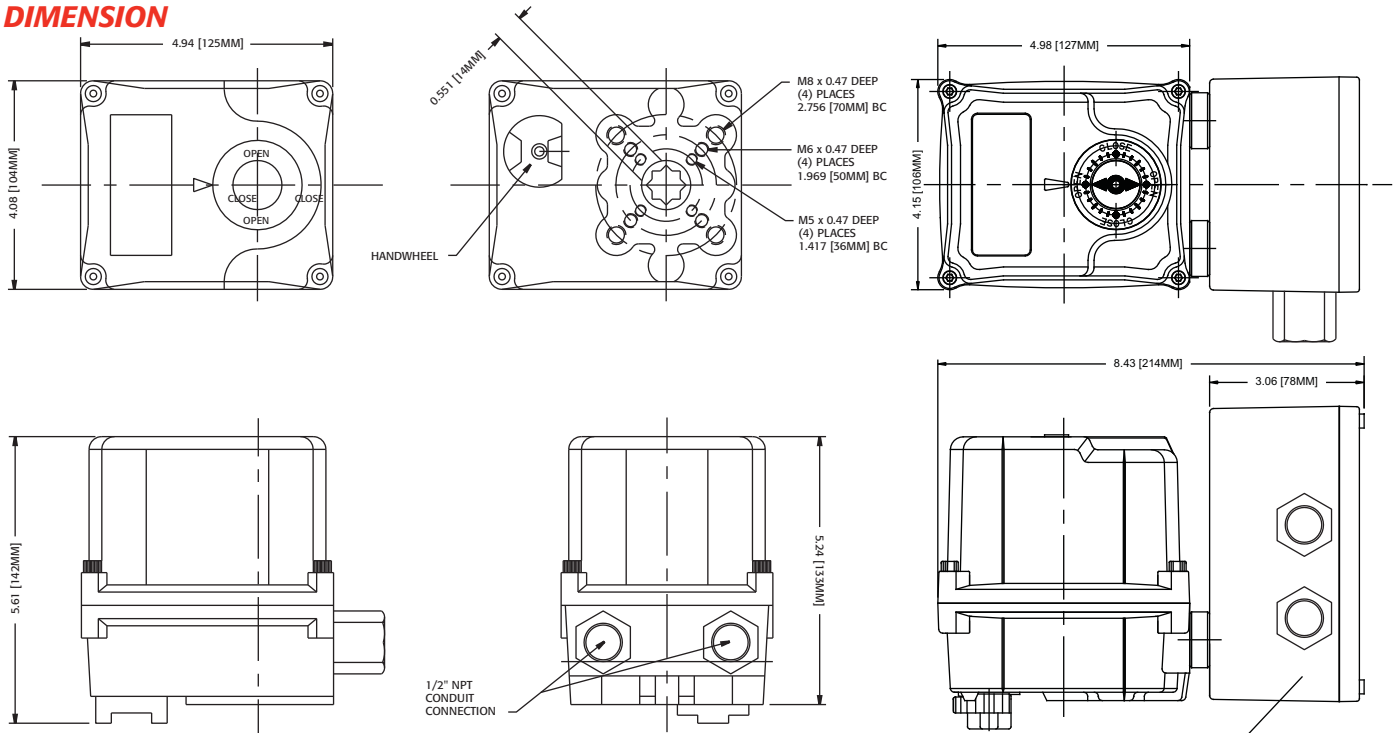DIMENSION

**Control Box for
Modulating card**

Electric Actuator WE/XE Series



Actuator Model	Output Torque	90 Deg Cycle Time (sec)	Motor Size	Full Load Amps					Locked Rotor Amps					Handwheel Turns	Weight
				AC/DC	1 Phase	3 Phase	AC/DC	1 Phase	3 Phase	AC/DC	1 Phase	3 Phase	AC/DC		
WE / XE	In-Lbs	60 / 50 Hz	Watts	24V	110V	220V	380V	440V	24V	110V	220V	380V	440V	N	Lbs
-690	690	13 / 16	15	3.5	1.00	0.45	N/A	N/A	10.00	1.46	0.71	N/A	N/A	10	16.4
-1350	1350	21 / 25	40	3.2	1.70	0.84	0.28	0.36	23.00	2.40	1.21	0.75	0.66	11	36.7
-1700	1700	21 / 25	40	3.2	1.70	0.84	0.28	0.36	23.00	2.40	1.21	0.75	0.66	11	36.7
-2640	2640	26 / 31	40	2.85	1.67	0.81	0.27	0.34	28.00	2.76	1.45	1.00	0.87	13.5	48.6
-4400	4400	26 / 31	90	N/A	3.56	1.30	0.42	0.47	N/A	5.98	2.35	1.73	1.50	13.5	50.8
-5200	5200	26 / 31	90	N/A	3.56	1.30	0.42	0.47	N/A	5.98	2.35	1.73	1.50	13.5	50.8
-6900	6900	31 / 37	180	N/A	4.93	2.20	0.61	0.67	N/A	6.94	3.60	2.73	2.38	16.5	64
-10500	10500	31 / 37	180	N/A	4.93	2.20	0.61	0.67	N/A	6.94	3.60	2.73	2.38	16.5	64
-17500	17500	95 / 112	180	N/A	4.93	2.20	0.61	0.67	N/A	6.94	3.60	2.73	2.38	49.5	167
-25900	25900	95 / 112	180	N/A	4.93	2.20	0.61	0.67	N/A	6.94	3.60	2.73	2.38	49.5	167

NOTE: Substitute "XE" for "WE" to specify explosion-proof design

Standard Specifications

Enclosure	Weatherproof enclosure, IP67, TYPE 4, 4X, 6
AWWA	Conforms to AWWA C540-93 requirements
Power supply	110/220V AC 1PH, 220/380/440/460/480VAC, 3 Phase, 50/60Hz, ±10%
Control power supply	110/220V AC 1PH, 50/60Hz, ±10%
Duty cycle(on-off)	70% Max 1800 start/hour
Duty cycle(modulating)	70% Max 1800 start/hour
Motor	Class F Reversible Induction motor
Limit switches	Open / Close, SPDT, 16A 1/2HP 125/250VAC, 0.6A 125VDC, 0.3A 250VDC
Additional limit switches	Open / Close, SPDT, 16A 1/2HP 125/250VAC, 0.6A 125VDC, 0.3A 250VDC
Torque switches	Open / Close, SPDT, 16A 1/2HP 125/250VAC, 0.6A 125VDC, 0.3A 250VDC
Stall protection	Built-in thermal protection
Travel angle	90°± 10°
Indicator	Continuous position indicator
Manual override	Declutching mechanism
Self locking	Provided by double worm gearing
Mechanical stopper	Open / Close(external adjustable screws)
Space heater	7-10W(110/220V AC) Anti-condensation
Cable Conduit	Two 3/4" NPT
Lubrication	Grease moly (EP type)
Terminal block	Spring loaded lever push type
Materials	Steel, Aluminium alloy, Al bronze, Polycarbonate
Ambient temperature	-4°F –158°F (optional -40° Low Temp Kit)
Ambient humidity	90% RH Max.(non-condensing)
External coating	Anodizing treatment before Dry powder, Polyester, Munsell no. 5R 3.5/12

Option Specifications

Explosion-proof enclosure II 2 G, EEx d IIB T4, IP67

Watertight enclosure (IP68 10M 72HR)
 Potentiometer unit (1K ~10K)
 Proportional control unit (input, output 0~10V DC, 4~20mA DC)
 Additional torque switches (SPDT x 2EA 250V AC 10A Rating)
 Semi-Integral control unit (Local/Remote Selector Switches)
 Intelligent Digital control unit (Local/Remote Selector Switches)
 Current position transmitter (output 4~20mA DC)
 Extension 120°, 180°, 270° turn
 Duty Cycle 70% max (in Ambient temperature)
 DC motor (24V DC)
 AC/DC 24V control
 Lever plate actuator
 Signal lamp unit (white-power on, red-close, green-open, yellow-over torque)
 Fire Proofing Actuator 1050 ±5°C/50 min
 Fire Proofing Actuator 250 ±5°C/150 min




Cam Block

- ▶ 2 travel limit switches for operation
- ▶ 2 auxiliary limit switches as dry connect for customer usage
- ▶ Easy setting from upside by two screws for tight lockup
- ▶ Each cam can be set independently



D-Type Cam




TMC3 Electronic Modulating Card

- ▶ Auto Calibration for Easy Setup
- ▶ 10 Bit Microprocessor controller for precise positioning and control
- ▶ 4-20mA, 1-5mA, 0-10 VDC, 1-5 VDC, 0-135 Ohm or Command Signal Potentiometer
- ▶ TMC3 Can be programmed to Fail in Place, Fail CW, or Fail CCW on loss of command signal
- ▶ Characterized Control-Linear, quick opening (Square root), or Equal Percentage (Square)
- ▶ OnBoard 4-20 mA transmitter (optional)




Fire Proofing Actuator



Signal LED Unit

- ▶ Large indicator with 4 monitoring lamps (Power, over torque, open and close)

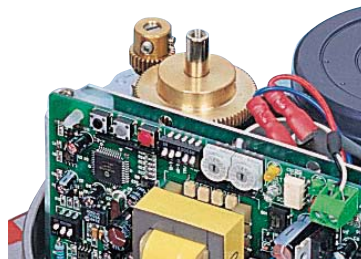

Potentiometer Kit

10K ohm, high resolution




Removable Drive Bushing

ATEX Certification



WE/XE Series
 WE/XE Series
 WE/XE Series
 except WE/XE-690
 except WE/XE-690
 except WE/XE-690
 WE/XE Series
 except WE/XE-17500, 25900
 except WE/XE-690
 WE/XE-690—WE/XE-2640
 WE/XE-690—WE/XE-2640
 except WE/XE-690
 except WE/XE-690
 Consult factory
 Consult factory

Construction

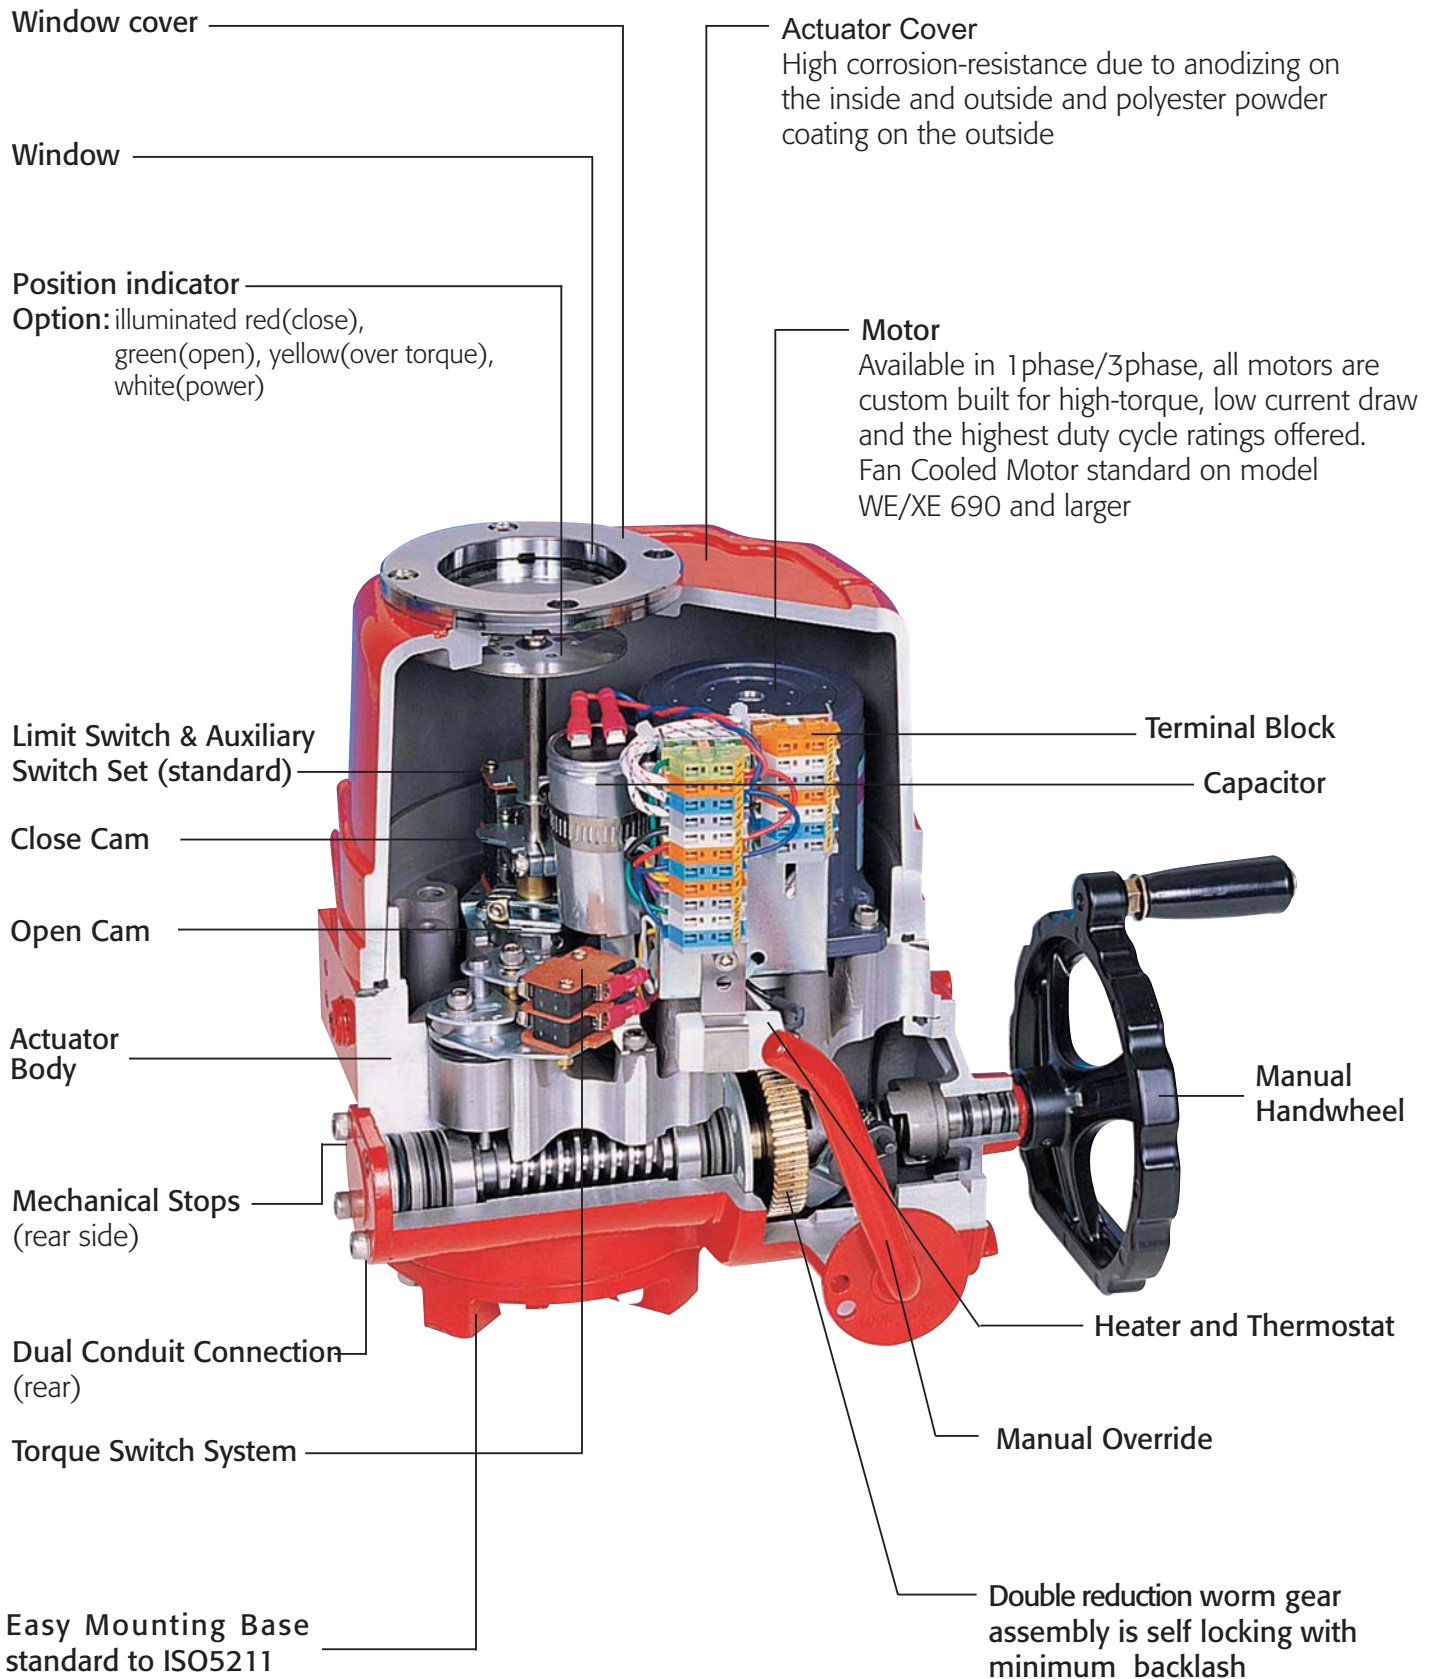

Standard Configuration




Terminal block

- ▶ Extra terminals for customer's convenience
- ▶ Spring Loaded Terminal Strip Provides Secure Connection



Heater

- ▶ Ceramic housing with thermostat to eliminate condensation (7-10 watt Standard)
- ▶ Optional High Wattage Heater for Low Temp applications to -40

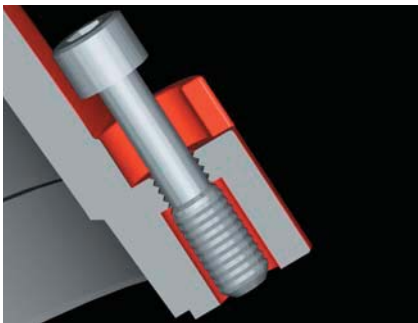


Captive cover bolt

- ▶ Cover bolts are specially designed to prevent loosening during maintenance or installation
- ▶ All external bolts are stainless steel for rust prevention.



Indicator sustained by spring

- ▶ Direction of visual indicator is set by factory
- ▶ In case of changing its direction, just grip the indicator plate and change the position.
- ▶ Spring beneath indicator plate sustains the set position
- ▶ No need to loosen screw and tighten it again

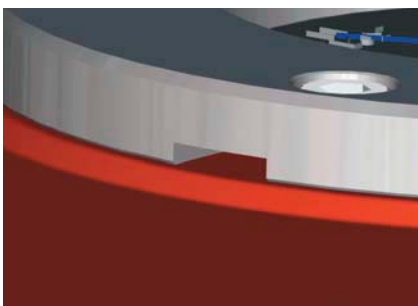


Slot on window cover for draining rainwater


- ▶ A drain slot is provided to eliminate water buildup on window

Dimensional Drawing

WE/XE-1350, 1700, 2640, 4400, 5200, 6900, 10500

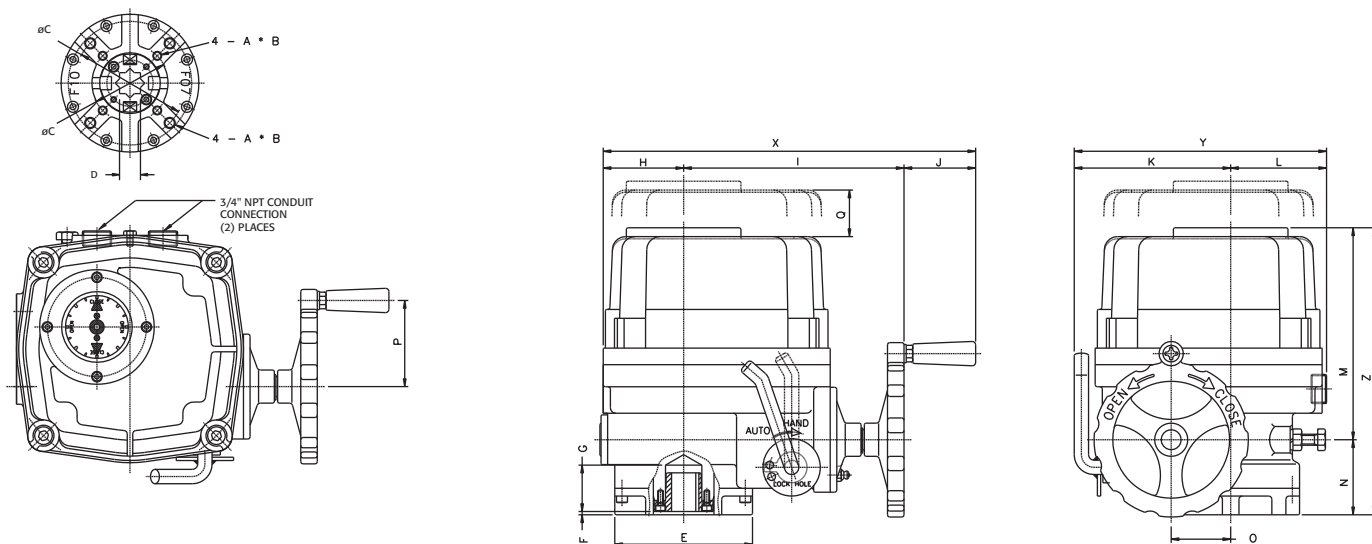

WE/XE-17500, 25900

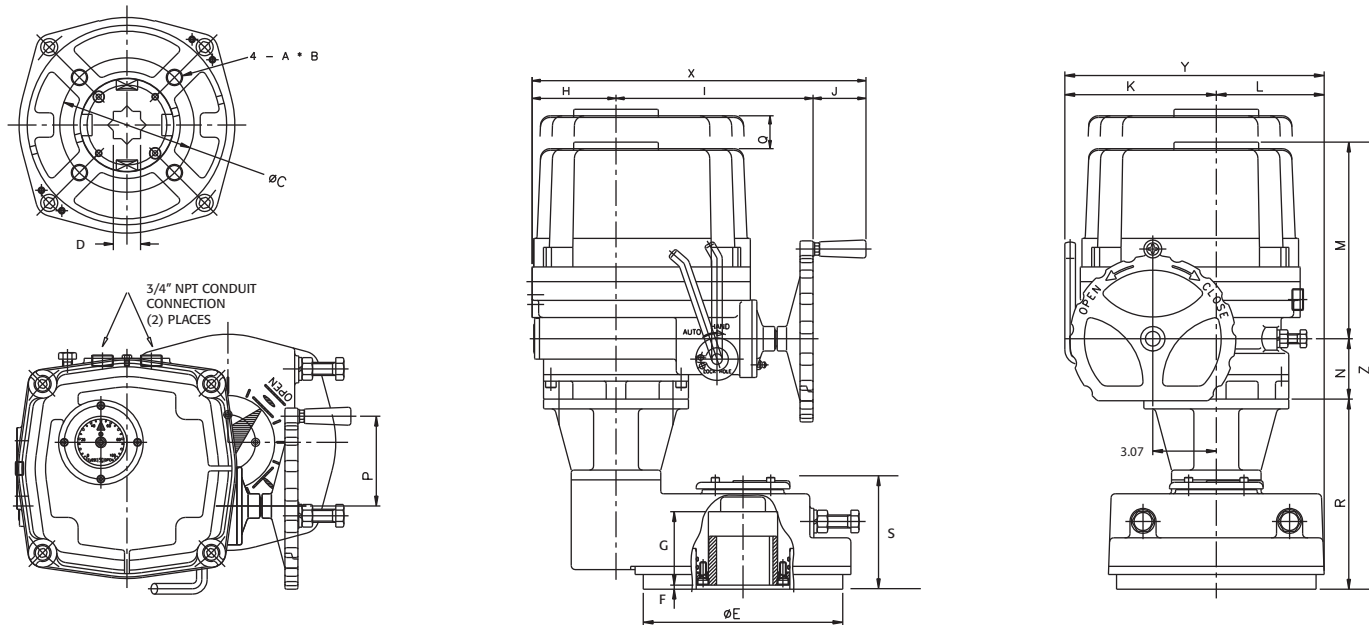


DIMENSIONS

Units (inches)

Model	ISO 5211	A	B	C	D sq	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	X	Y	Z
WE/XE-690	F07	M8	0.47	2.756	0.669	3.46	0.12	1.26	1.97	6.18	2.01	3.94	2.76	6.57	2.09	1.57	2.36	4.72	--	--	10.16	6.69	9.25
WE/XE-1350	F07/F10	M8 / M10	0.47 / 0.59	2.756 / 4.016	0.748	4.92	0.12	1.65	2.87	7.87	2.56	5.59	3.43	7.56	2.68	2.13	3.07	6.30	--	--	13.31	9.02	10.55
WE/XE-1700	F07/F10	M8 / M10	0.47 / 0.59	2.756 / 4.016	0.748	4.92	0.12	1.65	2.87	7.87	2.56	5.59	3.43	7.56	2.68	2.13	3.07	6.30	--	--	13.31	9.02	10.55
WE/XE-2640	F10/F12	M10 / M12	0.59 / 0.71	4.016 / 4.921	1.063	5.83	0.12	1.93	3.23	8.70	2.56	6.30	3.90	8.70	2.72	2.56	3.07	7.09	--	--	14.49	10.20	11.42
WE/XE-4400	F10/F12	M10 / M12	0.59 / 0.71	4.016 / 4.921	1.063	5.83	0.12	1.93	3.23	8.70	2.56	6.30	3.90	8.70	2.72	2.56	3.07	7.09	--	--	14.49	10.20	11.97
WE/XE-5200	F10/F12	M10 / M12	0.59 / 0.71	4.016 / 4.921	1.063	5.83	0.12	1.93	3.23	8.70	2.56	6.30	3.90	8.70	2.72	2.56	3.07	7.09	--	--	14.49	10.20	11.97
WE/XE-6900	F14	M16	0.95	5.512	1.417	7.01	0.12	2.24	4.06	9.53	2.56	7.32	4.37	9.49	2.91	3.07	4.33	8.27	--	--	16.14	11.69	12.99
WE/XE-10500	F14	M16	0.95	5.512	1.417	7.01	0.12	2.24	4.06	9.53	2.56	7.32	4.37	9.49	2.91	3.07	4.33	8.27	--	--	16.14	11.69	12.99
WE/XE-17500	F16	M20	1.18	6.496	1.417	9.65	0.20	3.54	4.06	9.53	2.56	7.32	5.24	9.49	2.91	3.07	4.33	8.27	9.17	5.24	16.14	12.56	22.17
WE/XE-25900	F16	M20	1.18	6.496	1.417	9.65	0.20	3.54	4.06	9.53	2.56	7.32	5.24	9.49	2.91	3.07	4.33	8.27	9.17	5.24	16.14	12.56	22.17

Wiring Connection


Two Position 115 VAC/1 Ph WE/XE - 1350 thru 25900 SE 1080

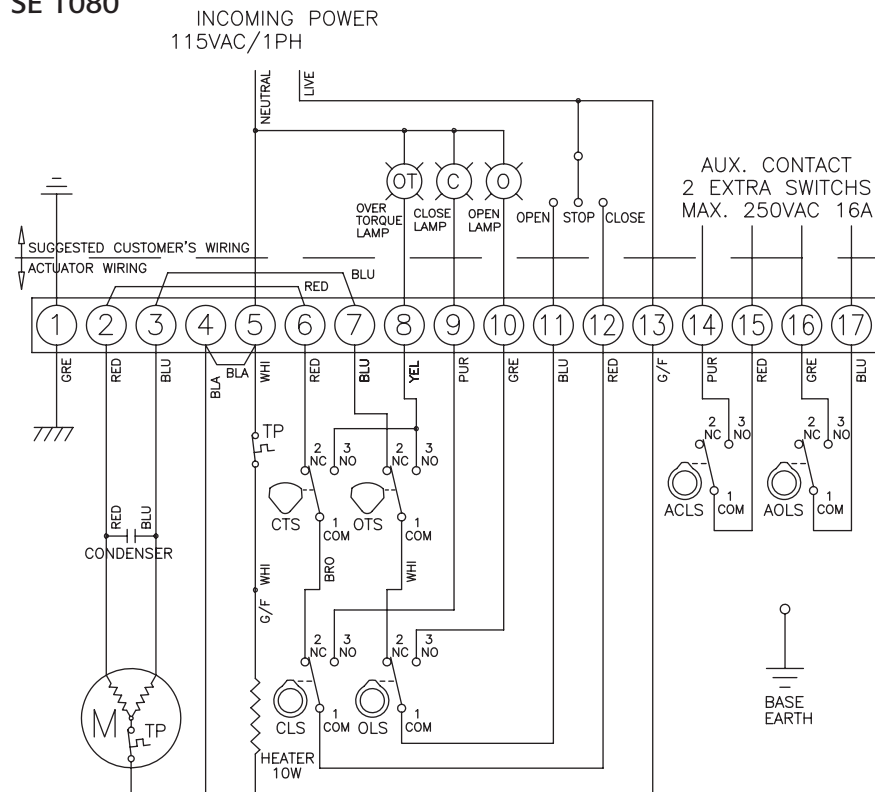

TORQUE AND LIMIT SWITCH OPERATION		
SWITCH	CLOSE ←	INTERMEDIATE → OPEN
CLS 1-2		
CLS 1-3		
OLS 1-2		
OLS 1-3		
ACLS 1-2		
ACLS 1-3		
AOLS 1-2		
AOLS 1-3		
* CLOSING TORQUE SWITCH INTERRUPTS CONTROL IF MECHANICAL OVERLOAD OCCURS DURING CLOSING CYCLE		
* OPENING TORQUE SWITCH INTERRUPTS CONTROL IF MECHANICAL OVERLOAD OCCURS DURING OPENING CYCLE		
CTS 1-3		
OTS 1-3		
SYMBOL	DESCRIPTION	RATING
CLS	CLOSE LIMIT SWITCH	250VAC 10A
OLS	OPEN LIMIT SWITCH	250VAC 10A
CTS	CLOSE TORQUE SWITCH	250VAC 10A
OTS	OPEN TORQUE SWITCH	250VAC 10A
ACLS	AUX. CLOSE LIMIT SWITCH	250VAC 16A
AOLS	AUX. OPEN LIMIT SWITCH	250VAC 16A
TP	THERMAL PROTECTOR	250VAC 15A

*EACH ACTUATOR SHOULD BE POWERED THROUGH IT'S OWN INDIVIDUAL SWITCH OR RELAY CONTACTS TO PREVENT CROSS FEED BETWEEN TWO OR MORE ACTUATORS.

Proportional 115 VAC/1 Ph WEM/XEM - 1350 thru 25900 SE 1052

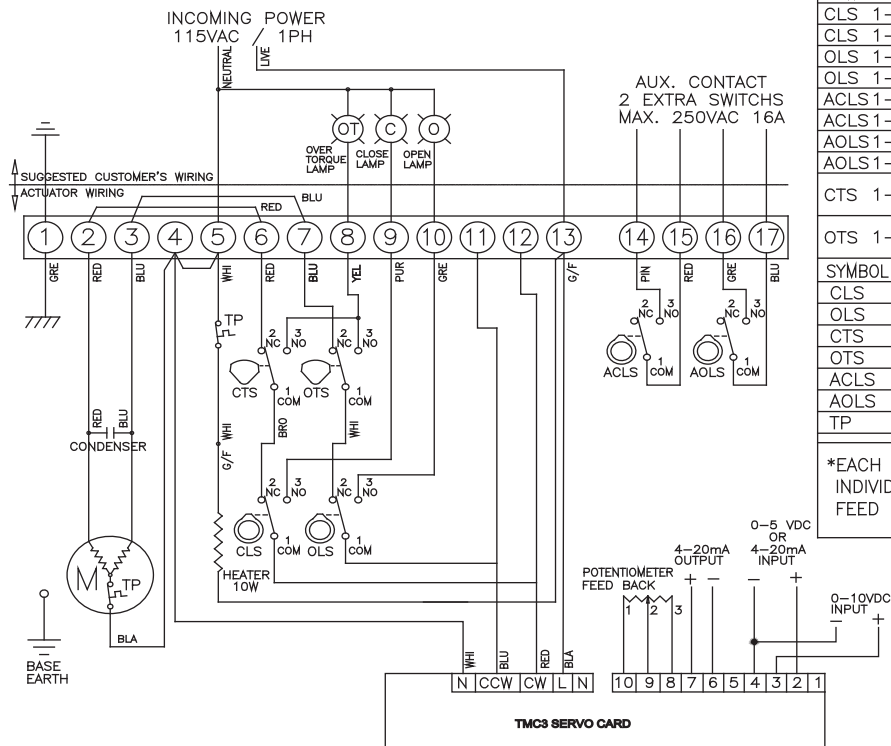

TORQUE AND LIMIT SWITCH OPERATION		
SWITCH	CLOSE ←	INTERMEDIATE → OPEN
CLS 1-2		
CLS 1-3		
OLS 1-2		
OLS 1-3		
ACLS 1-2		
ACLS 1-3		
AOLS 1-2		
AOLS 1-3		
* CLOSING TORQUE SWITCH INTERRUPTS CONTROL IF MECHANICAL OVERLOAD OCCURS DURING CLOSING CYCLE		
* OPENING TORQUE SWITCH INTERRUPTS CONTROL IF MECHANICAL OVERLOAD OCCURS DURING OPENING CYCLE		
CTS 1-3		
OTS 1-3		
SYMBOL	DESCRIPTION	RATING
CLS	CLOSE LIMIT SWITCH	250VAC 10A
OLS	OPEN LIMIT SWITCH	250VAC 10A
CTS	CLOSE TORQUE SWITCH	250VAC 10A
OTS	OPEN TORQUE SWITCH	250VAC 10A
ACLS	AUX. CLOSE LIMIT SWITCH	250VAC 16A
AOLS	AUX. OPEN LIMIT SWITCH	250VAC 16A
TP	THERMAL PROTECTOR	250VAC 15A

*EACH ACTUATOR SHOULD BE POWERED THROUGH IT'S OWN INDIVIDUAL SWITCH OR RELAY CONTACTS TO PREVENT CROSS FEED BETWEEN TWO OR MORE ACTUATORS.

Wiring drawings are provided upon request.

Intelligent & Integral Control Unit (Special Application)

Intelligent Digital Control Unit

- ▶ Light, compact and integral design
- ▶ Wide range of electric power application (AC 220V~AC480V/3 phase)
- ▶ Built-in auto phase discriminator (easy and convenient wiring)
- ▶ Digital indicator with number, bar graph, menu and (3)LED lamps
- ▶ Separate terminal chamber (Reliable against water, vibration, temperature, etc.)
- ▶ Easy application for WE-Series Actuators
- ▶ Various options available



Semi-Integral Control Unit



- ▶ Light, compact and integrated design (IMS, Local/Remote control)
- ▶ Wide range of electric power application (AC 115V~AC480V/1-phase or 3 phase)
- ▶ Phase protect monitoring by LED in case of wrong wiring
- ▶ Easy application for WE-Series Actuators
- ▶ Various option available



LED lamp signal

White	○	: Power
Blue	●	: Remote
Yellow	●	: Fault
Red	●	: Open/ Opening
Green	●	: Close/ Closing

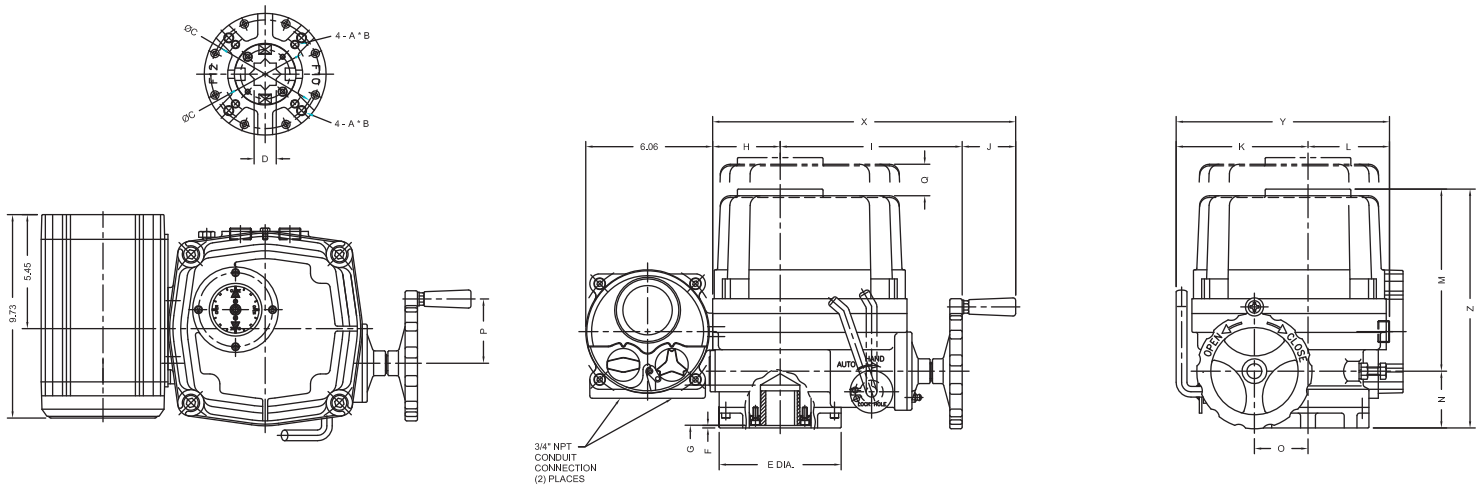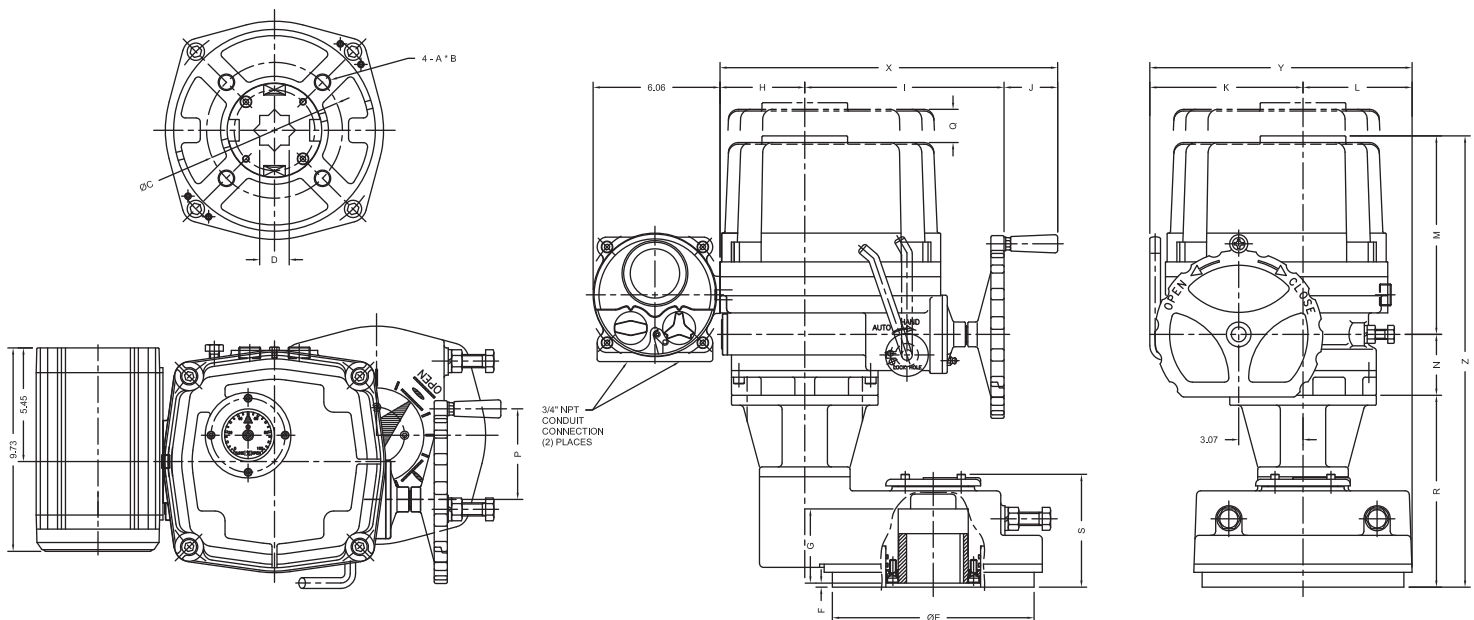


WE-1350, 1700, 2640, 4400, 5200, 6900, 10500 Intelligent Digital Control Unit**WE-17500, 25900 Intelligent Digital Control Unit****DIMENSIONS**

Units (inches)


Model	ISO 5211	A	B	C	D sq	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	X	Y	Z
WE-1350	F07/F10	M8 / M10	0.47 / 0.59	2.756 / 4.016	0.748	4.92	0.12	1.65	2.87	7.87	2.56	5.59	3.43	7.56	2.68	2.13	3.07	6.30	--	--	13.31	9.02	10.55
WE-1700	F07/F10	M8 / M10	0.47 / 0.59	2.756 / 4.016	0.748	4.92	0.12	1.65	2.87	7.87	2.56	5.59	3.43	7.56	2.68	2.13	3.07	6.30	--	--	13.31	9.02	10.55
WE-2640	F10/F12	M10 / M12	0.59 / 0.71	4.016 / 4.921	1.063	5.83	0.12	1.93	3.23	8.70	2.56	6.30	3.90	8.70	2.72	2.56	3.07	7.09	--	--	14.49	10.20	11.42
WE-4400	F10/F12	M10 / M12	0.59 / 0.71	4.016 / 4.921	1.063	5.83	0.12	1.93	3.23	8.70	2.56	6.30	3.90	8.70	2.72	2.56	3.07	7.09	--	--	14.49	10.20	11.97
WE-5200	F10/F12	M10 / M12	0.59 / 0.71	4.016 / 4.921	1.063	5.83	0.12	1.93	3.23	8.70	2.56	6.30	3.90	8.70	2.72	2.56	3.07	7.09	--	--	14.49	10.20	11.97
WE-6900	F14	M16	0.95	5.512	1.417	7.01	0.12	2.24	4.06	9.53	2.56	7.32	4.37	9.49	2.91	3.07	4.33	8.27	--	--	16.14	11.69	12.99
WE-10500	F14	M16	0.95	5.512	1.417	7.01	0.12	2.24	4.06	9.53	2.56	7.32	4.37	9.49	2.91	3.07	4.33	8.27	--	--	16.14	11.69	12.99
WE-17500	F16	M20	1.18	6.496	1.417	9.65	0.20	3.54	4.06	9.53	2.56	7.32	5.24	9.49	2.91	3.07	4.33	8.27	9.17	5.24	16.14	12.56	22.17
WE-25900	F16	M20	1.18	6.496	1.417	9.65	0.20	3.54	4.06	9.53	2.56	7.32	5.24	9.49	2.91	3.07	4.33	8.27	9.17	5.24	16.14	12.56	22.17

Dimensional Drawing

WE/XE-1350, 1700, 2640, 4400, 5200, 6900, 10500 Semi-integral Control Unit

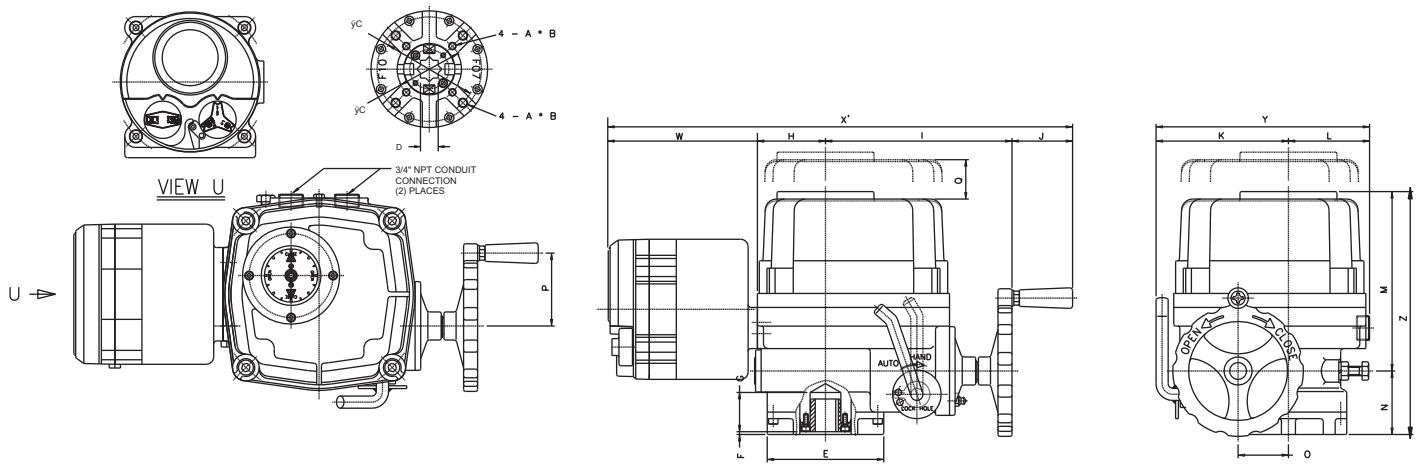

WE/XE-17500, 25900

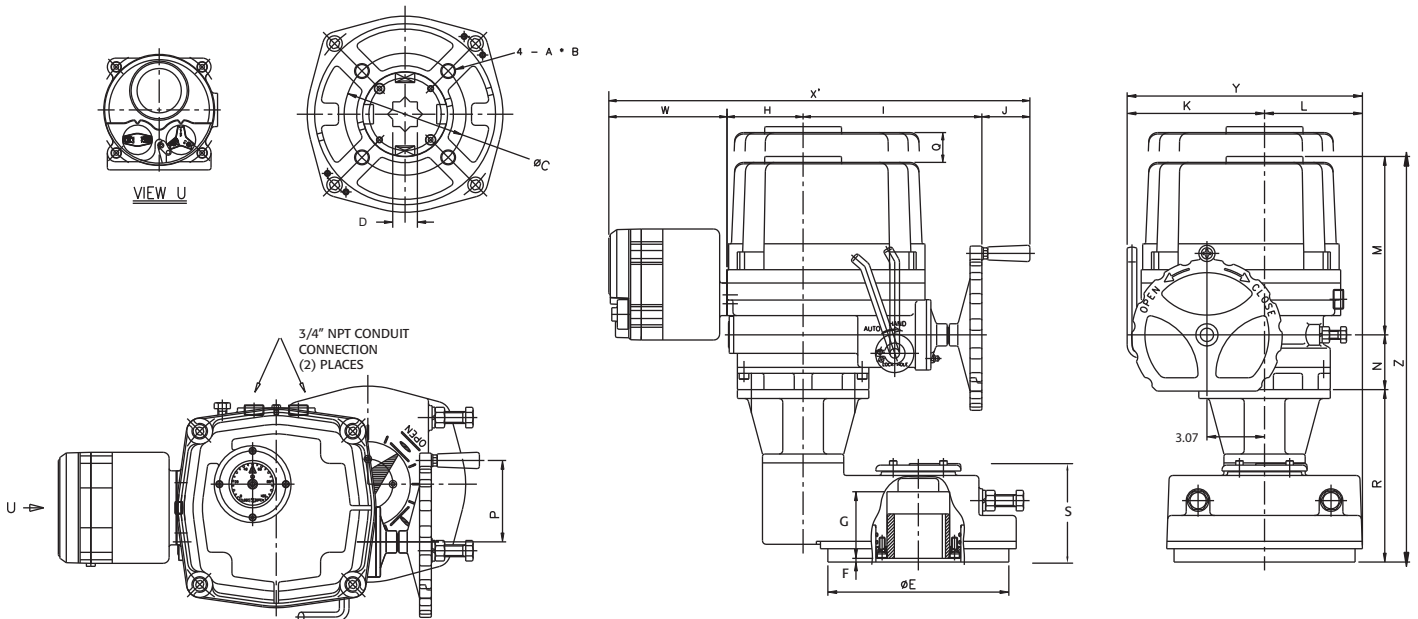


DIMENSIONS

Units (inches)


Model	ISO 5211	A	B	C	D sq	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	W	X	Y	Z
WE/XE-1350	F07/F10	M8 / M10	0.47 / 0.59	2.756 / 4.016	0.748	4.92	0.12	1.65	2.87	7.87	2.56	5.59	3.43	7.56	2.68	2.13	3.07	6.30	--	--	6.30	19.61	9.02	10.55
WE/XE-1700	F07/F10	M8 / M10	0.47 / 0.59	2.756 / 4.016	0.748	4.92	0.12	1.65	2.87	7.87	2.56	5.59	3.43	7.56	2.68	2.13	3.07	6.30	--	--	6.30	19.61	9.02	10.55
WE/XE-2640	F10/F12	M10 / M12	0.59 / 0.71	4.016 / 4.921	1.063	5.83	0.12	1.93	3.23	8.70	2.56	6.30	3.90	8.70	2.72	2.56	3.07	7.09	--	--	6.30	14.49	10.20	11.42
WE/XE-4400	F10/F12	M10 / M12	0.59 / 0.71	4.016 / 4.921	1.063	5.83	0.12	1.93	3.23	8.70	2.56	6.30	3.90	8.70	2.72	2.56	3.07	7.09	--	--	6.30	20.79	10.20	11.97
WE/XE-5200	F10/F12	M10 / M12	0.59 / 0.71	4.016 / 4.921	1.063	5.83	0.12	1.93	3.23	8.70	2.56	6.30	3.90	8.70	2.72	2.56	3.07	7.09	--	--	6.30	20.79	10.20	11.97
WE/XE-6900	F14	M16	0.95	5.512	1.417	7.01	0.12	2.24	4.06	9.53	2.56	7.32	4.37	9.49	2.91	3.07	4.33	8.27	--	--	6.30	22.44	11.69	12.99
WE/XE-10500	F14	M16	0.95	5.512	1.417	7.01	0.12	2.24	4.06	9.53	2.56	7.32	4.37	9.49	2.91	3.07	4.33	8.27	--	--	6.30	22.44	11.69	12.99
WE/XE-17500	F16	M20	1.18	6.496	1.417	9.65	0.20	3.54	4.06	9.53	2.56	7.32	5.24	9.49	2.91	3.07	4.33	8.27	9.17	5.24	6.30	22.44	12.56	22.17
WE/XE-25900	F16	M20	1.18	6.496	1.417	9.65	0.20	3.54	4.06	9.53	2.56	7.32	5.24	9.49	2.91	3.07	4.33	8.27	9.17	5.24	6.30	22.44	12.56	22.17

Wiring drawings are provided upon request.

Wiring Connection

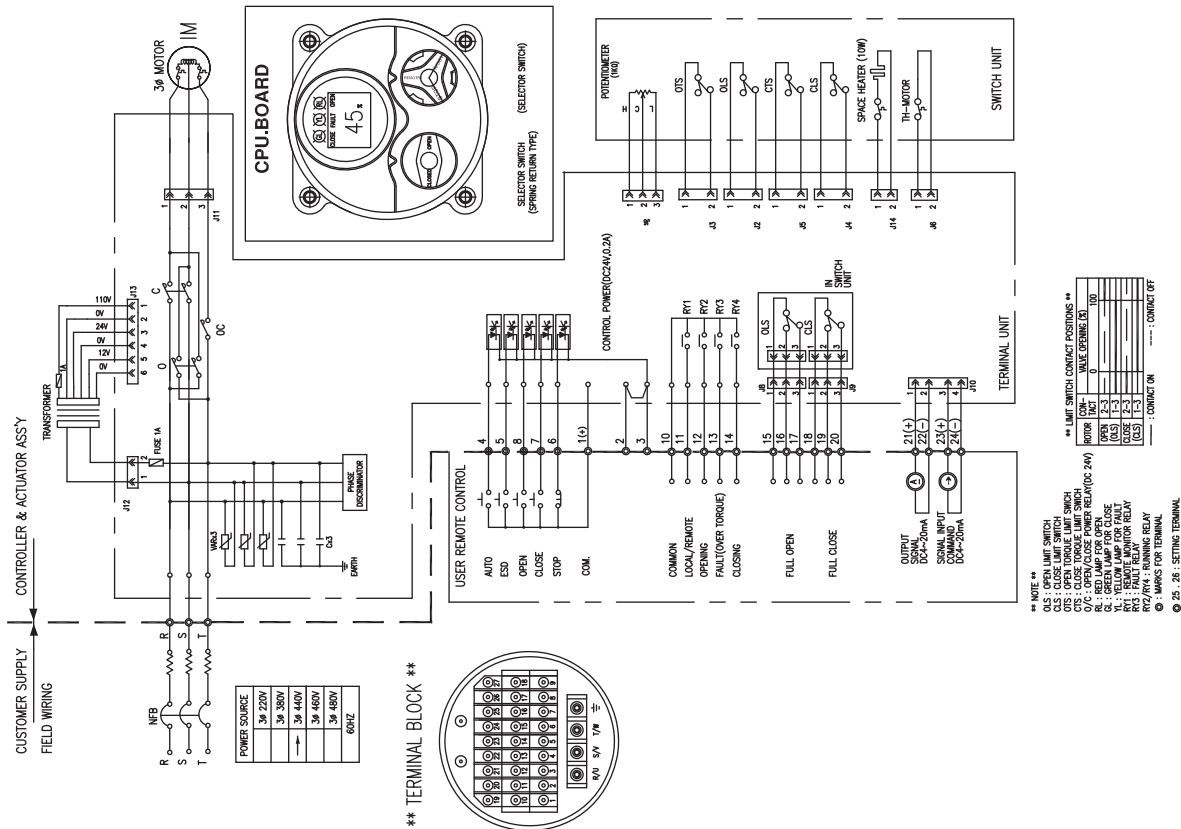
SE 1128 *Digital Control Unit 3 Phase/Proportional*

SE 1120 *Digital Control Unit 3 Phase/2 Position*

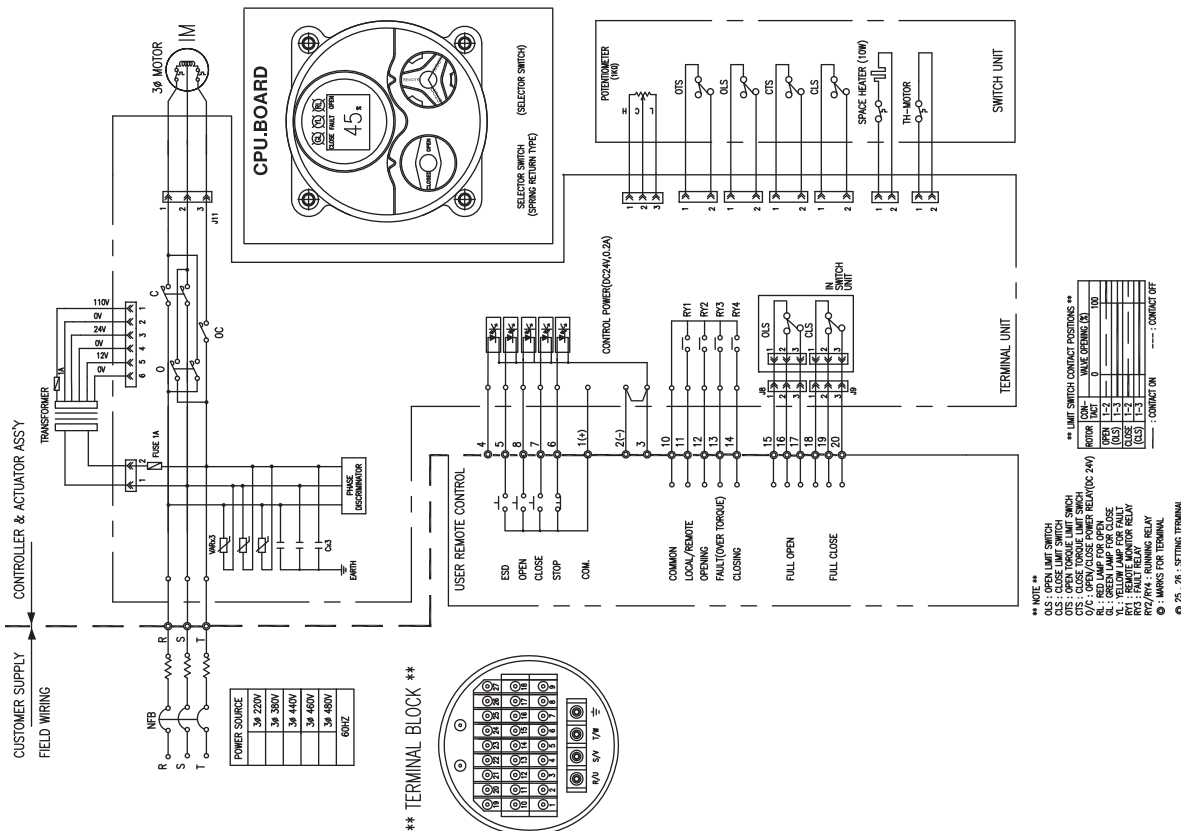


Wiring Connection

SE 1096 *Semi-integral Unit 1 Phase/Proportional*

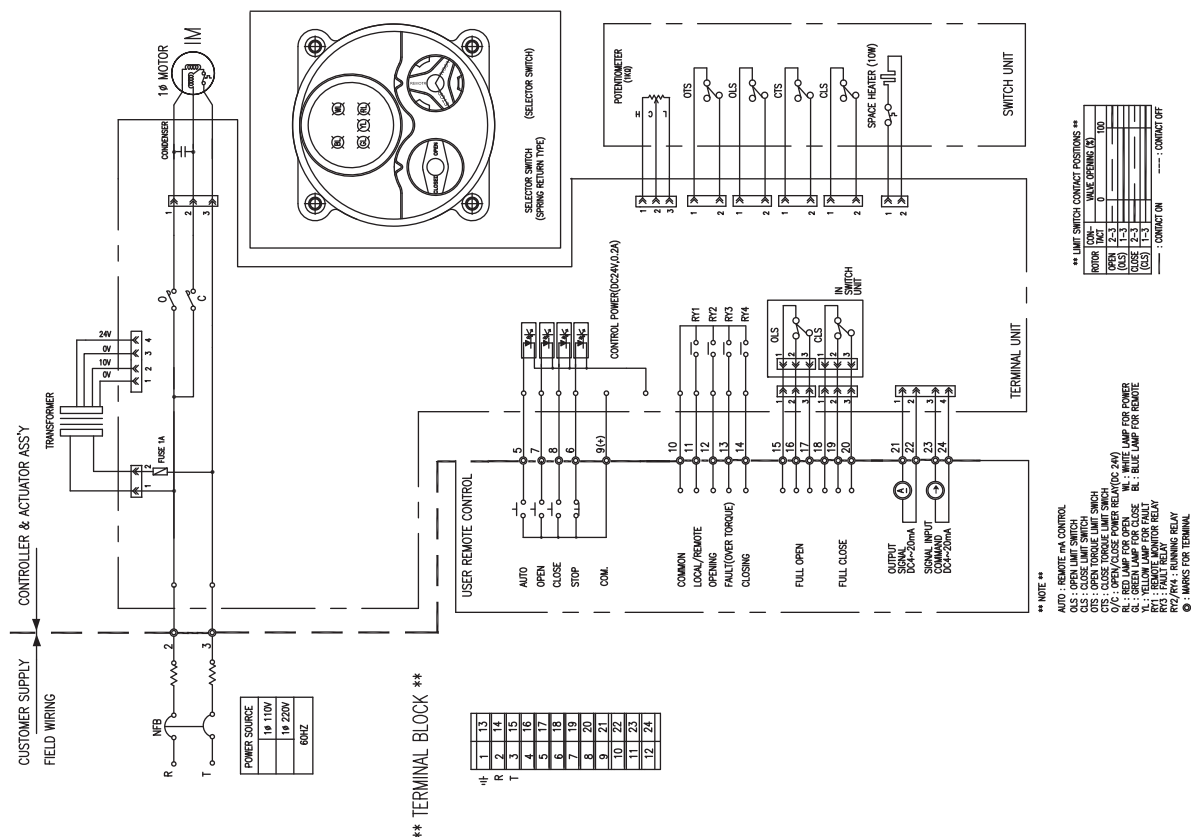

SE 1097 *Semi-integral Unit 1 Phase/2 Position*

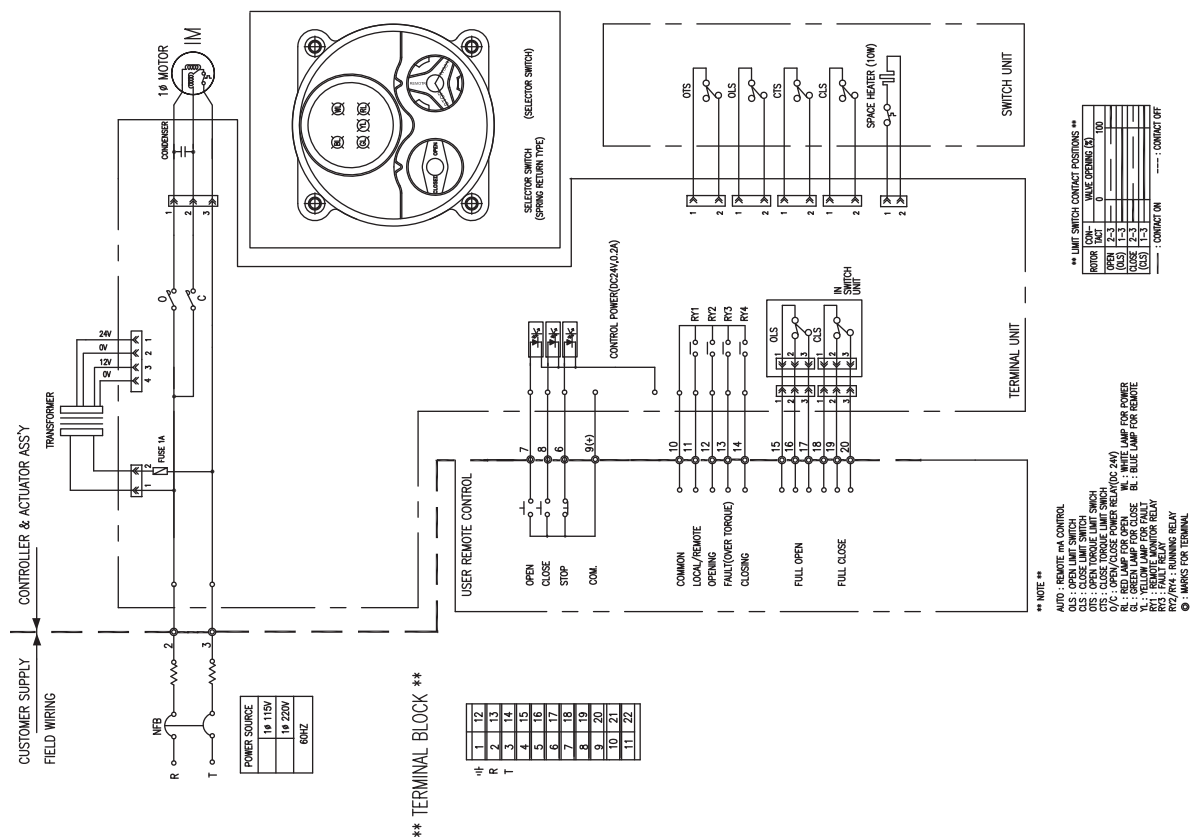

Triac WE / XE Series Part Number Reference

Model	
WE	Weather Proof, IP67, TYPE 4, 4X, 6
XE	Explosion Proof Design, ATEX EEx d IIB T4, IP67
FE	Fire Proof Unit (1050°F for 50 Min)
SE	Submersible unit (IP68, 10 meters for 72 Hours)

Control	
Blank	(2) Position Control (Open / Close)
M	Standard Modulating Control Card (TMC3)
D	DHC-100 Modulating Card Ultra precise: Provides 450 points of resolution

Actuator Size	
-500	500 In-Lbs
-690	690 In-Lbs
-1350	1350 In-Lbs
-1700	1700 In-Lbs
-2640	2640 In-Lbs
-4400	4400 In-Lbs
-5200	5200 In-Lbs
-6900	6900 In-Lbs
-10500	10500 In-Lbs
-17500	17500 In-Lbs
-25900	25900 In-Lbs


Motor	
X	115VAC/1PH Place holder only - Omit when at end of part number
A	24V AC/DC (N/A 4400 - 25900)
B	N/A
C	24VDC (N/A 4400 - 25900)
D	24VAC/1PH (N/A 4400 - 25900)
E	220VAC/1PH
F	220VAC/3PH (N/A 500, 690)
H	380/440VAC/3PH (N/A 500, 690)
J	460/480VAC/3PH (N/A 500, 690)

Options	
X	No options Place holder only - Omit when at end of part number
B	Semi-integral Control Unit (N/A 500, 690)
C	Intelligent Digital Control Unit (N/A 500, 690)
D	Local / Remote Control Switches (Only 500, 690)
E	Electronic Speed Control Module - 115 VAC only
F	2 Wire Control & Speed Control - 115 VAC only
G	End of travel time delay (same in both directions)
R	2 Wire Control, Relay - 115 VAC control voltage
S	2 Wire Control, Relay - 24 VAC control voltage
T	2 Wire Control, Relay - 24 VDC control voltage

Miscellaneous Options Note: Add all miscellaneous options to end of part number	
Blank	No options
T	4-20mA Transmitter
N	1000 Ohm Potentiometer
O	5000 Ohm Potentiometer
P	10K Ohm Potentiometer
X	120° Operation (N/A 17500 or 25900)
Y	180° Operation (N/A 17500 or 25900)
Z	270° Operation (N/A 17500 or 25900)
L	-40° Low Temp Kit
I	Position Indicator Lamps (Power, Open, Close, Fault) (N/A 500, 690)
S	(2) additional limit switches (6 total) (N/A 500, 690)
R	(2) additional torque switches (4 total) (N/A 500, 690)
XX	Special cycle time
	Floor Drive Mounting Configuration - Please See Acutrol Floor Drive Catalog

Example: WEM-1350 (Weather Proof Housing, Modulating Control, model size 1350, 115VAC / 1PH)

WEM-1350XXT (Weather Proof Housing, Modulating Control, model size 1350, 115VAC / 1PH, 4-20mA Transmitter)

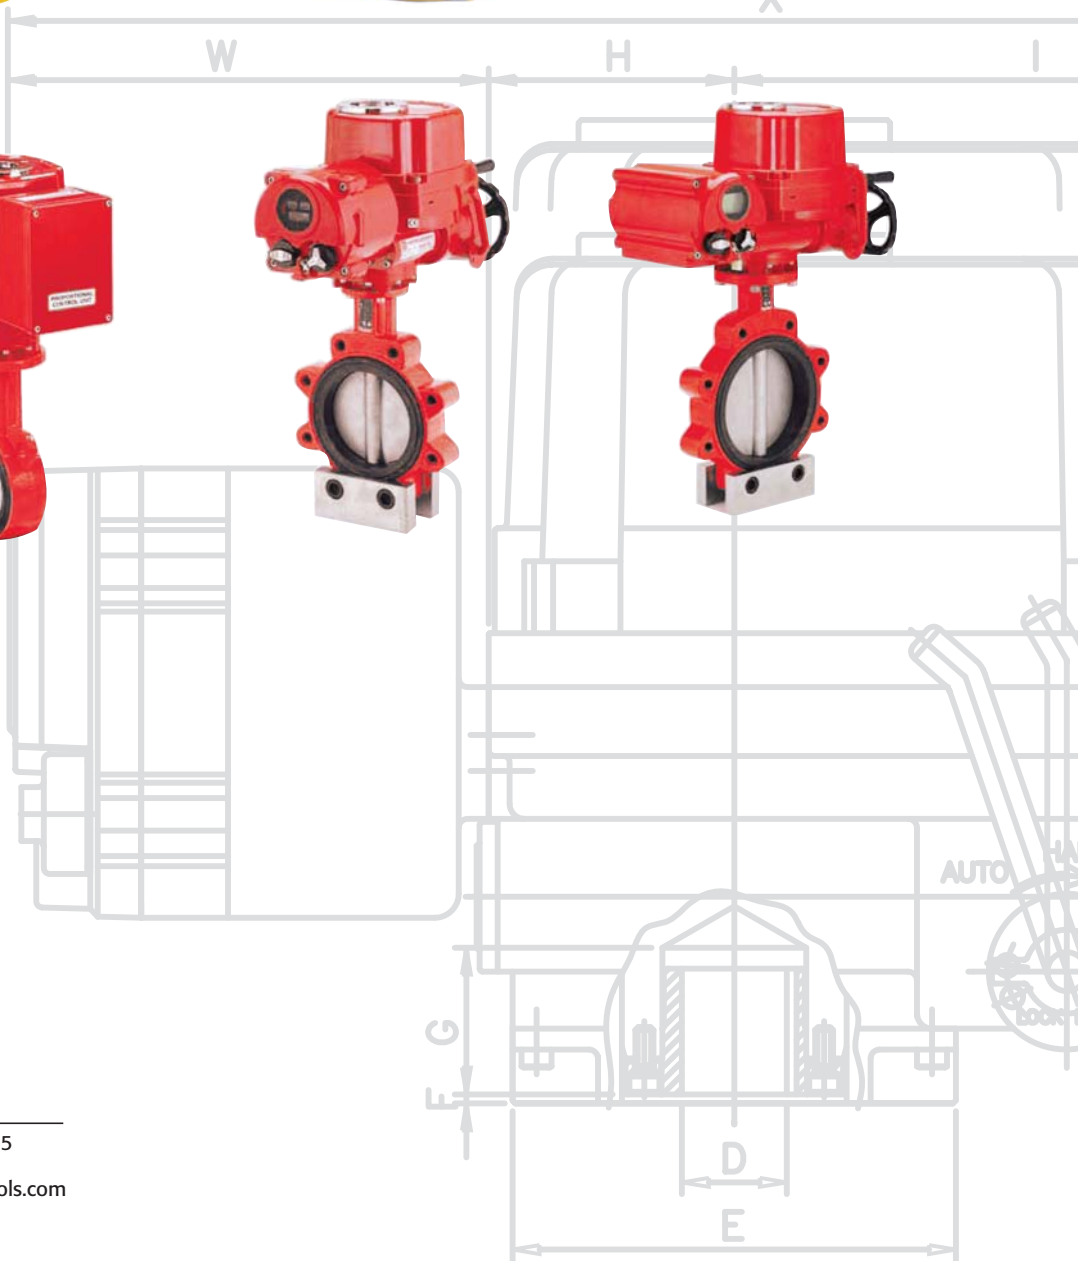

Triac Division
11363 Deerfield Rd.
Cincinnati, Ohio 45242

PHONE (513) 247-5465
FAX (513) 247-5462
e-mail: sales@a-tcontrols.com
www.a-tcontrols.com