


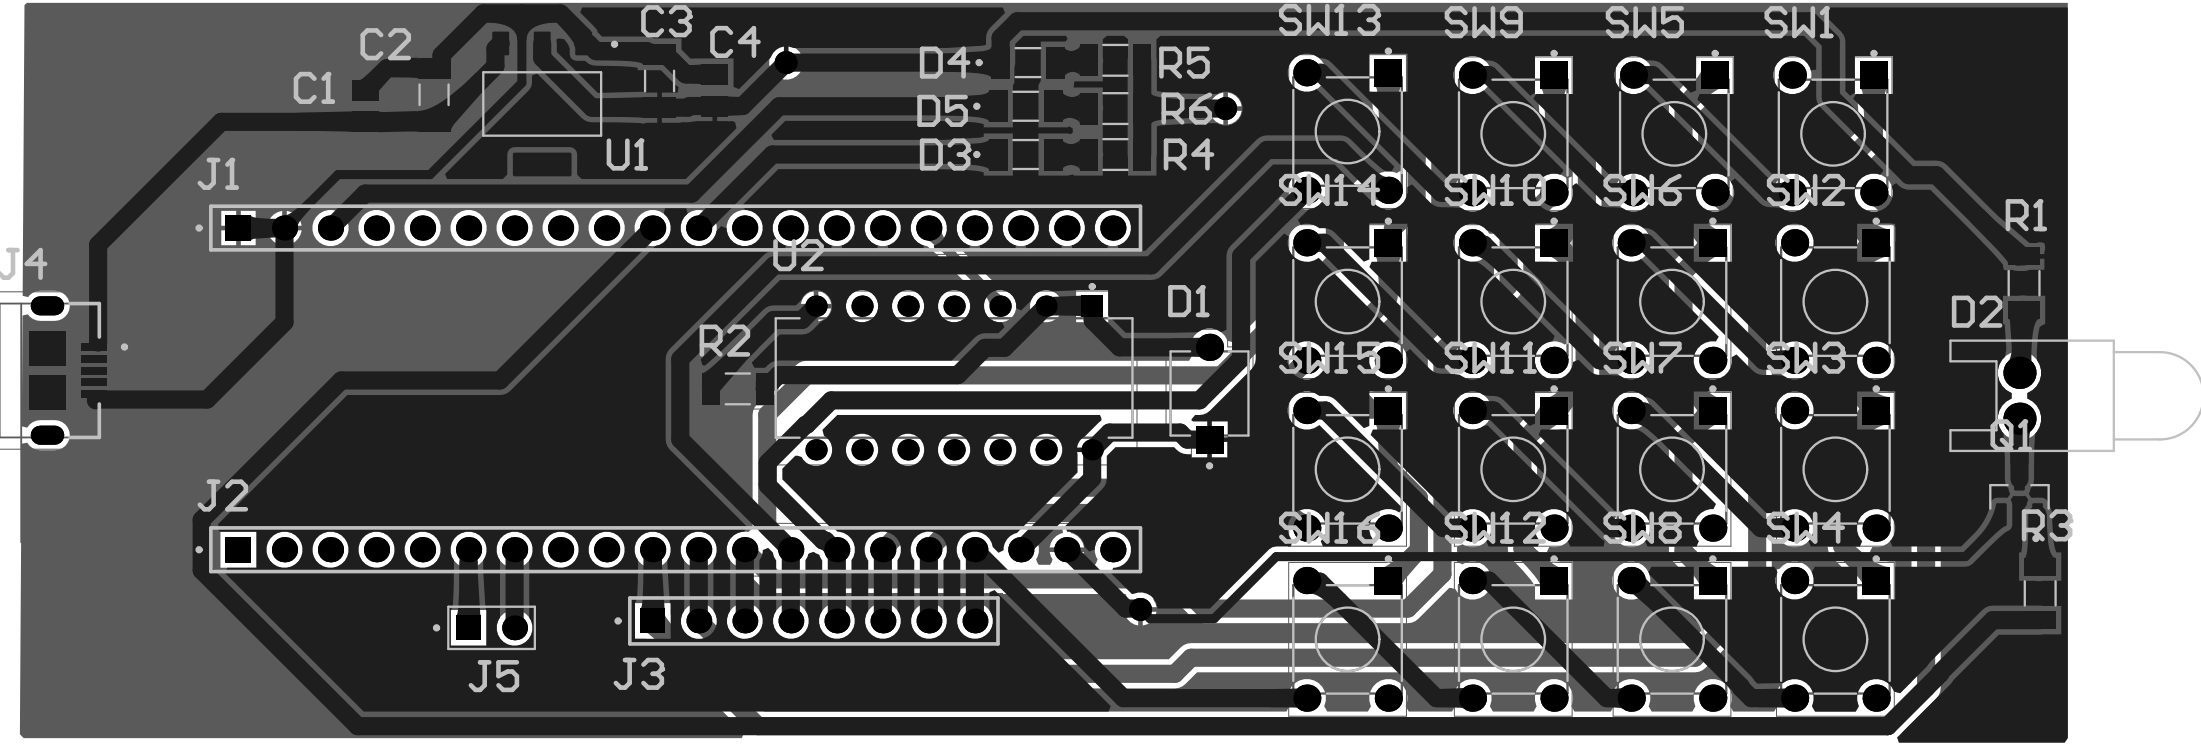

Comment	Description	Designator	Footprint	LibRef	Quantity
C104	Capacitor;Ceramic;Cap 4.7uF;Tol+10%;SMT;V ol-Rtg 25V;X5R;TR KEMET C0805C475K3PACTU	C1, C4	CAPC2012X88N	C0805C475K3PACTU	2
C106	1206 C 1uF Ceramic Multilayer Capacitor, 50 VDC, +125degC, X7R Dielec, +/-10% KEMET C1206C105K5RACTU	C2, C3	CAPC3216X120N	C1206C105K5RACTU	2
BPW34	Photodiode 850nm 20ns 120Â° 2-DIP (0.213, 5.40mm)	D1	DIO_BPW34	BPW34	1
LED0	Typical INFRARED GaAs LED	D2	LED-0	LED0	1
LED1206	2.6 V Red LED SMD	D3, D4, D5	LEDC3216X120N	LHN974_RED_LED_1206	3
Left		J1	SAMTEC_SSW-120-01-G-S-LL	SSW-120-01-G-S-LL	1
SSW-120-01-G-S-LL		J2	SAMTEC_SSW-120-01-G-S-LL	SSW-120-01-G-S-LL	1
MTSW-108-22-L-S-205		J3	SAMTEC_MTSW-108-22-L-S-205	MTSW-108-22-L-S-205	1
USB3090-XX-X_REVE2	USB - micro AB USB 2.0 Receptacle Connector 5 Position Surface Mount, Right Angle; Through Hole, 2.35mm profile, 5 Pins, Horizontal, Bottom mount	J4	GCT_USB3090-XX-X_REVE2	USB3090-XX-X_REVE2	1
3-644456-2	HEADER ASSEMBLY, NARROW, MTA-100, 2 POSITION, STRAIGHT TE Connectivity 3- 644456-2	J5	TE_3-644456-2	3-644456-2	1
BC847B	Bipolar (BJT) Transistor NPN 45V 100mA 100MHz 150mW Surface Mount SOT-523	Q1	SOT100P230X110-3N	BC847B	1
RC1206JR-0713RL	13 Ohms Â±5% 0.25W, 1/4W Chip Resistor 1206 (3216 Metric) Moisture Resistant Thick Film	R1, R2, R3, R4, R5, R6	RESC3116X65N	RC1206JR-0713RL	6
1825910-6	Switch Push Button OFF (ON) SPST Round Button 0.05A 24VDC Momentary Contact PC Pins Thru-Hole	SW1, SW2, SW3, SW4, SW5, SW6, SW7, SW8, SW9, SW10, SW11, SW12, SW13, SW14, SW15, SW16	SW_1825910-6-4	1825910-6	16
AMS1117-5.0	1A LOW DROPOUT VOLTAGE REGULATOR	U1	SOT229P700X180-4N	AMS1117-5.0	1
CD4093BE	4-ch, 2-input, 3-V to 18-V NAND gates with Schmitt-Trigger inputs	U2	DIP794W45P254L196 9H508Q14	CD4093BE	1