

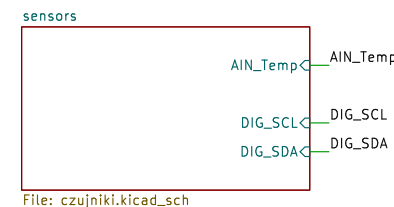
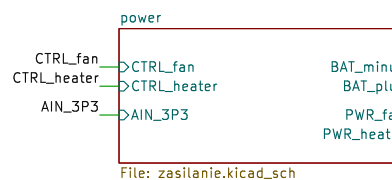
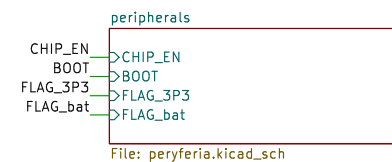


ESP32-C3FN4

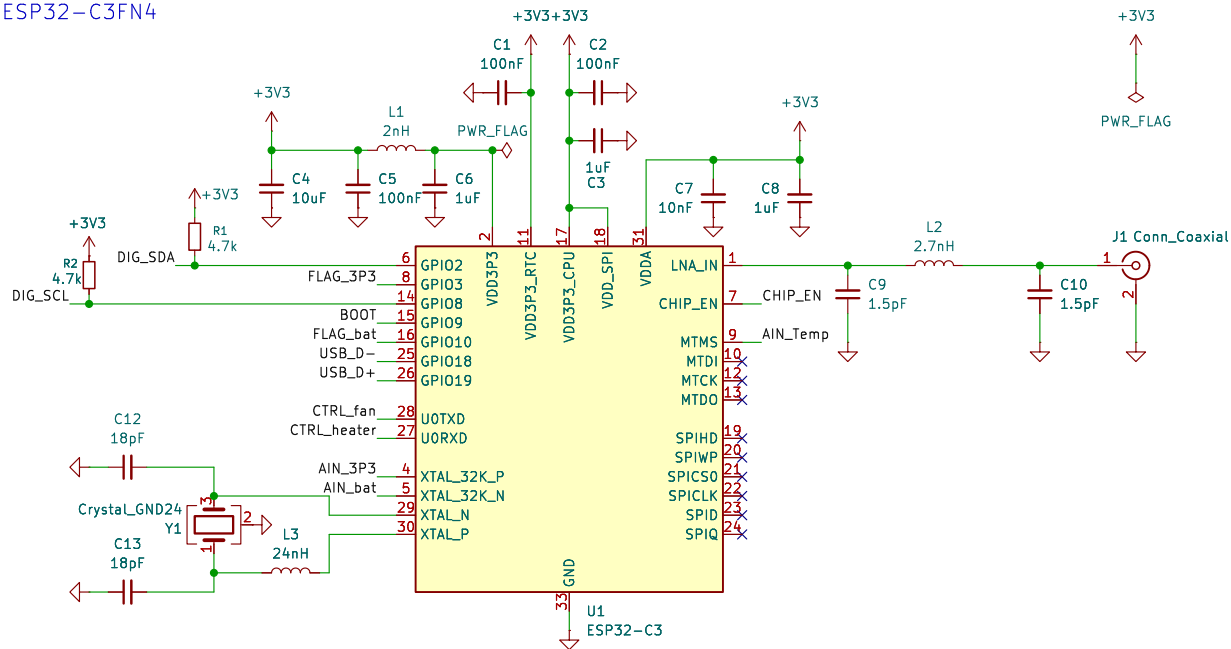

USB B micro



Sheet: /
File: stacja_pogodowa.kicad_sch

Title:

Size: A4


Date:

KiCad E.D.A. 9.0.7


Rev:

Id: 1/4


Analog temperature sensor,
low-pass filter
 $ku=1$
 $f_{cutoff}=5\text{Hz}$
 $Q=0.707$

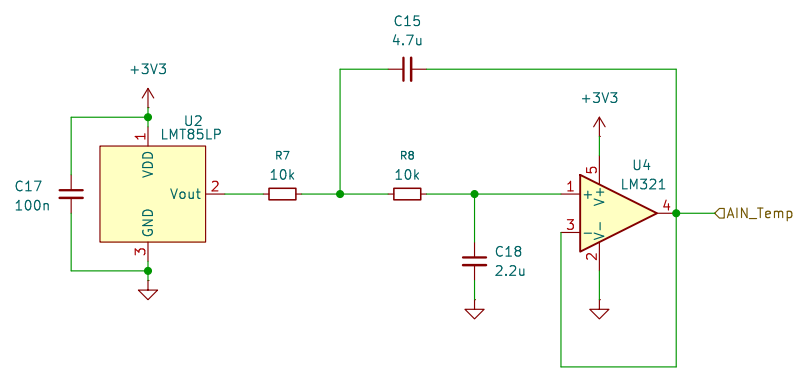


Temperature and humidity sensor with I2C interface

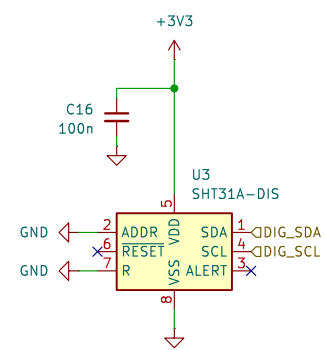


heater
 $R = 22\ \Omega$
 $I = 550\text{mA}$

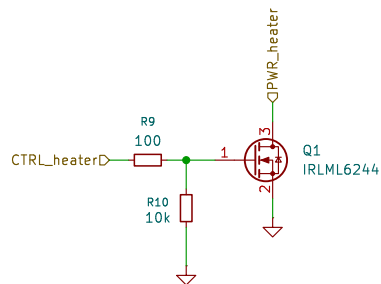

fan
12VDC
 $I_{rated} = 60\text{mA}$
 $I_{max} = 300\text{mA}$

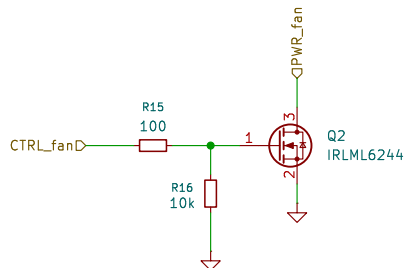

buck converter DC/DC
10.8V-13.2V --> 3.3V
 $I_{max} = 1\text{A}$

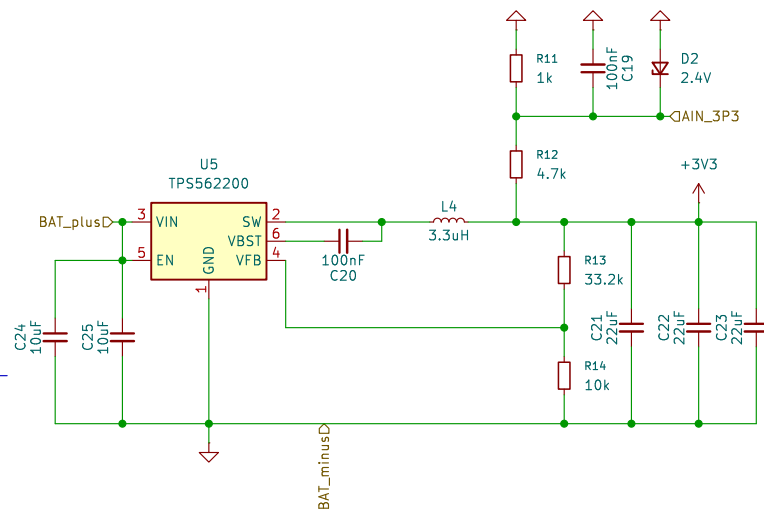

Sheet: /power/
File: zasilanie.kicad_sch

Title:

Size: A4


Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 3/4

BOOT & CHIP_EN switch

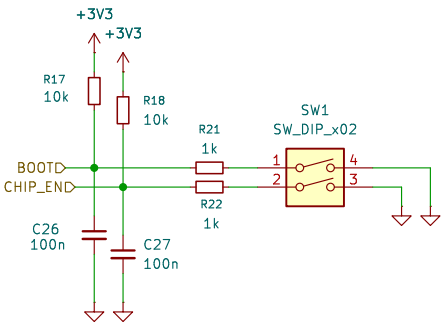

Green LED informing user about battery and converter voltage

