Test Report issued under the responsibility of:

TÜVRheinland®

TEST REPORT
IEC 62133
Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications

Report Number. .....:	17058351 001
Date of issue .....:	2016-04-15
Total number of pages.....	25 pages
Applicant's name.....:	Shenzhen Elite Electronic Co., Ltd.
Address .....:	2 Floor, 2B Building, Huiye Technology park,Guanguang Road , Gongming Town,Guangming New District, Shenzhen, P.R. China
Test specification:	
Standard.....:	IEC 62133: 2012 (Second Edition)
Test procedure .....:	CB Scheme
Non-standard test method.....:	N/A
Test Report Form No.....:	IEC62133B
Test Report Form(s) Originator ....:	UL(Demko)
Master TRF.....:	Dated 2013-03

Copyright © 2013 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

Test item description .....:	Rechargeable Li-ion Battery
Trade Mark .....:	ELITOP
Manufacturer.....:	Same as applicant
Address .....:	Same as applicant
Model/Type reference .....:	HY10S2P
Ratings .....:	36Vdc, 4.4Ah, 158Wh

Testing procedure and testing location:		
☒ **CB Testing Laboratory:**	TÜV Rheinland (Shenzhen) Co., Ltd.	
Testing location/ address .....:	East of F/1, F/2~F/4, Building 1, Cybio Technology Building No. 6 Langshan No.2 Road, North Hi-tech Industry Park 518057 Shenzhen Nanshan District CHINA	
☐ **Associated CB Testing Laboratory:**		
Testing location/ address .....:		
Tested by (name + signature).....:	Jason Tang	Jason Tang
Approved by (name + signature) .....:	Charlie Zeng	Charlie Zeng
☐ **Testing procedure: TMP**		
Testing location/ address .....:		
Tested by (name + signature).....:		
Approved by (name + signature) .....:		
☐ **Testing procedure: WMT**		
Testing location/ address .....:		
Tested by (name + signature).....:		
Witnessed by (name + signature) ....:		
Approved by (name + signature) .....:		
☐ **Testing procedure: SMT**		
Testing location/ address .....:		
Tested by (name + signature).....:		
Approved by (name + signature) .....:		
Supervised by (name + signature)...:		

List of Attachments (including a total number of pages in each attachment):

Attachment 1: Photo documentation (4 pages).

Summary of testing:

Tests performed (name of test and test clause):	**Testing location:**
cl.5.6.2 Design recommendation(Lithium system); cl.8.1 Charging procedure for test purposes (for Cells and Batteries); cl.8.2.1 Continuous charging at constant voltage (Cells); cl.8.3.1 External short circuit (Cells); cl.8.3.2 External short circuit (Batteries); cl.8.3.3 Free fall (Cells and Batteries); cl.8.3.4 Thermal abuse (Cells); cl.8.3.5 Crush (Cells); cl.8.3.6 Over-charging of battery; cl.8.3.7 Forced discharge (Cells); cl.8.3.8 Transport tests (Cells); cl.8.3.9 Design evaluation – Forced internal short circuit (Cells); Tests are made with the number of cells and batteries specified in IEC 62133: 2012 (Second Edition) Table 2.	**TÜV Rheinland (Shenzhen) Co., Ltd.** East of F/1, F/2~F/4, Building 1, Cybio Technology Building No. 6 Langshan No.2 Road, North Hi-tech Industry Park 518057 Shenzhen Nanshan District CHINA

Summary of compliance with National Differences:

BE, BY, CH, CN, DE, DK, FI, FR, GB, HU, JP, KR, NL, NO, SE, SG.

BE=Belgium, BY=Belarus, CH=Switzerland, CN=China, DE=Germany, DK=Denmark, FI=Finland, FR=France, GB=United Kingdom, HU=Hungary, JP=Japan, KR=Republic of Korea, NL=The Netherlands, NO=Norway, SE=Sweden, SG=Singapore.

☒**The product fulfils the requirements of EN62133: 2013**

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

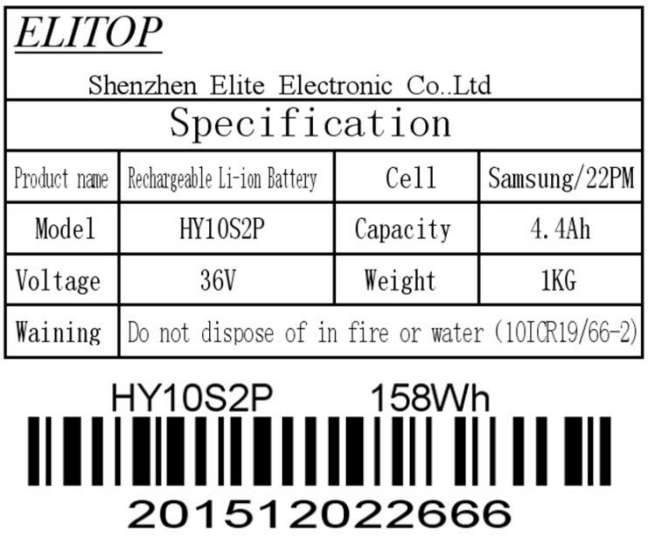

ELITOP Shenzhen Elite Electronic Co..Ltd			
Specification			
Product name	Rechargeable Li-ion Battery	Cell	Samsung/22PM
Model	HY10S2P	Capacity	4.4Ah
Voltage	36V	Weight	1KG
Waining	Do not dispose of in fire or water (10ICR19/66-2)		

Test item particulars.....:	
Classification of installation and use.....:	N/A
Supply connection.....:	DC connector
Recommend charging method declared by the manufacturer ..... :	Charge at constant current 880mA until voltage reaches 42V, and then charge at constant voltage 42V till charge current is 220mA.
Discharge current (0.2 I_t A) ..... :	880mA
Specified final voltage ..... :	27.5V
Chemistry ..... :	☐ nickel systems ..... ☒ lithium systems
Recommend of charging limit for lithium system	
Upper limit charging voltage per cell.....:	4.25V
Maximum charging current.....:	2000mA
Charging temperature upper limit.....:	45°C
Charging temperature lower limit.....:	0°C
Polymer cell electrolyte type ..... :	☐ gel polymer ☐ solid polymer ☒ N/A
Possible test case verdicts:	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
Testing.....:	
Date of receipt of test item .....:	Mar 13, 2016
Date (s) of performance of tests.....:	Mar 13, 2016 –Apr 08, 2016

General remarks:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.
"(See Enclosure #)" refers to additional information appended to the report.
"(See appended table)" refers to a table appended to the report.
Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

Manufacturer's Declaration per sub-clause 4.2.5 of IECEE 02:

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided ..... :	☐ **Yes** ☒ **Not applicable**

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies) ..... :	Same as applicant

General product information:

This battery is constructed with twenty lithium-ion cells (10S2P), and has overcharge, over-discharge, over current and short-circuits proof circuit.

The main features of the battery are shown as below (clause 8.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
HY10S2P	4400mAh	36V	880mA	880mA	2000mA	10000mA	42V	27.5V

The main features of the battery are shown as below (clause 8.1.2):

Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
HY10S2P	42.5V	220mA	0°C	45°C

The main features of the cell in the battery are shown as below (clause 8.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
ICR18650-22PM	2200mAh	3.6V	1075mA	430mA	2150mA	10000mA	4.2V	2.75V

The main features of the cell in the battery are shown as below (clause 8.1.2):

Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
ICR18650-22PM	4.25V	110mA	0°C	45°C

Construction:

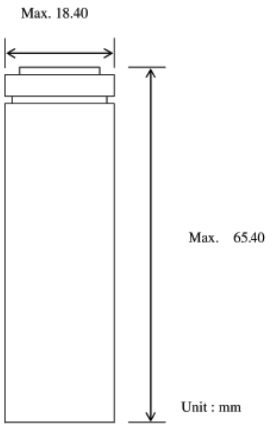

Cell

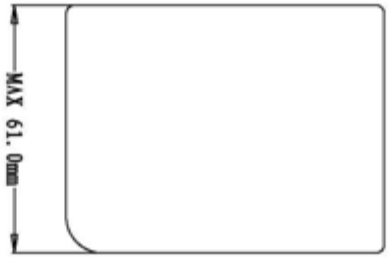

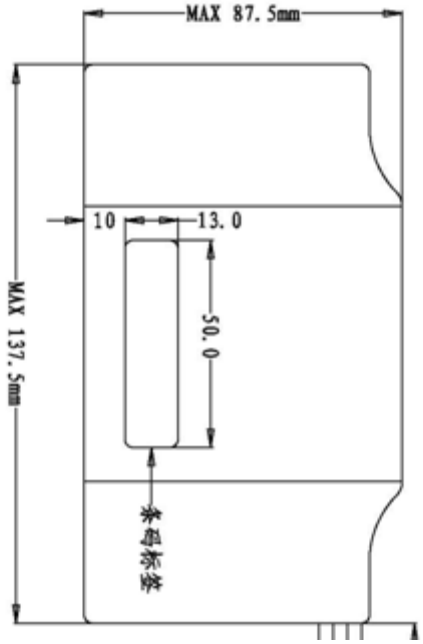

Battery:

Circuit diagram:

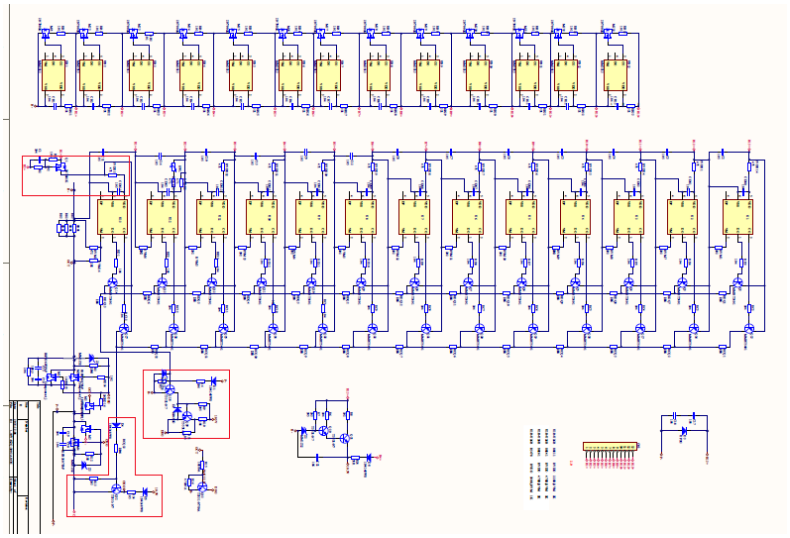

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
4	**Parameter measurement tolerances**		**P**
	Parameter measurement tolerances		P
5	**General safety considerations**		**P**
5.1	General		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal case exists.	N/A
	Insulation resistance (MΩ) ..... :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate creepage and clearance distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Venting mechanism exists on the cylindrical cell.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N/A
5.4	Temperature/voltage/current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented	Overcharge, over discharge, over current and short-circuit proof circuit used in this battery. See tests of clause 8.	P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that associated chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits specified in the user manual.	P
5.5	Terminal contacts		P

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	Terminals have a clear polarity marking on the external surface of the battery	DC connector used. The design of the external connector prevents reverse polarity connections.	P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current		P
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short circuits		P
5.6	Assembly of cells into batteries		P
5.6.1	If there is more than one battery housed in a single battery case, cells used in the assembly of each battery have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer	10S2P	P
	Each battery has an independent control and protection		N/A
	Manufacturers of cells make recommendations about current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate separate circuitry to prevent the cell reversal caused by uneven discharges		N/A
	Protective circuit components are added as appropriate and consideration given to the end-device application		P
	When testing a battery, the manufacturer of the battery provides a test report confirming the compliance according to this standard		N/A
5.6.2	Design recommendation for lithium systems only		P
	For the battery consisting of a single cell or a single cellblock: - Charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Clause 8.1.2, Table 4; or		N/A
	- Charging voltage of the cell does not exceed the different upper limit of the charging voltage determined through Clause 8.1.2, NOTE 1.		N/A

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - The voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, by monitoring the voltage of every single cell or the single cellblocks; or	Charging voltage for each cellblock: 4.2V, not exceed 4.25V specified in Clause 8.1.2, Table 4.	P
	- The voltages of any one of the single cells or single cellblocks does not exceed the different upper limit of the charging voltage, determined through Clause 8.1.2, NOTE 1, by monitoring the voltage of every single cell or the single cellblocks		P
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - Charging is stopped when the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks; or		P
	- Charging is stopped when the upper limit of the different charging voltage, determined through Clause 8.1.2, NOTE 1, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		P
5.7	Quality plan		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	Complied. Quality plan provided.	P

6	**Type test conditions**		**P**
	Tests were made with the number of cells or batteries specified in Table 1 for nickel-cadmium and nickel-metal hydride systems and Table 2 for lithium systems, using cells or batteries that are not more than six months old	Complied. Table 2 for Lithium system.	P
	Unless noted otherwise in the test methods, testing was conducted in an ambient of 20°C ± 5°C.	Tests are carried out at 20°C ± 5°C.	P

7	**Specific requirements and tests (nickel systems)**		**N/A**
7.1	Charging procedure for test purposes	Lithium system.	N/A
7.2	Intended use		N/A
7.2.1	Continuous low-rate charging (cells)		N/A
	Results: No fire. No explosion		N/A

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
7.2.2	Vibration		N/A
	Results: No fire. No explosion. No leakage	(See Table 7.2.2)	N/A
7.2.3	Moulded case stress at high ambient temperature		N/A
	Oven temperature (°C) ..... :		—
	Results: No physical distortion of the battery casing resulting in exposure if internal components		N/A
7.2.4	Temperature cycling		N/A
	Results: No fire. No explosion. No leakage.		N/A
7.3	Reasonably foreseeable misuse		N/A
7.3.1	Incorrect installation cell		N/A
	The test was carried out using: - Four fully charged cells of the same brand, type, size and age connected in series, with one of them reversed; or		N/A
	- A stabilized dc power supply.		N/A
	Results: No fire. No explosion..... :	(See Table 7.3.1)	N/A
7.3.2	External short circuit		N/A
	The cells or batteries were tested until one of the following occurred: - 24 hours elapsed; or		N/A
	- The case temperature declined by 20% of the maximum temperature rise		N/A
	Results: No fire. No explosion..... :	(See Table 7.3.2)	N/A
7.3.3	Free fall		N/A
	Results: No fire. No explosion.		N/A
7.3.4	Mechanical shock (crash hazard)		N/A
	Results: No fire. No explosion. No leakage.		N/A
7.3.5	Thermal abuse		N/A
	Oven temperature (°C) ..... :		—
	Results: No fire. No explosion.		N/A
7.3.6	Crushing of cells		N/A
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or		N/A
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	The cell is prismatic type and a second set of samples was tested, rotated 90° around longitudinal axis compared to the first set		N/A
	Results: No fire. No explosion..... :	(See Table 7.3.6)	N/A
7.3.7	Low pressure		N/A
	Chamber pressure (kPa)..... :		—
	Results: No fire. No explosion. No leakage.		N/A
7.3.8	Overcharge		N/A
	Results: No fire. No explosion..... :	(See Table 7.3.8)	N/A
7.3.9	Forced discharge		N/A
	Results: No fire. No explosion..... :	(See Table 7.3.9)	N/A
8	**Specific requirements and tests (lithium systems)**		**P**
8.1	Charging procedures for test purposes		P
8.1.1	First procedure: This charging procedure applied to tests other than those specified in 8.1.2		P
8.1.2	Second procedure: This charging procedure applied to the tests of 8.3.1, 8.3.2, 8.3.4, 8.3.5, and 8.3.9		P
	If a cell's specified upper and/or lower charging temperature exceeds values for the upper and/or lower limit test temperatures of Table 4, the cells were charged at the specified values plus 5 °C for the upper limit and minus 5 °C for the lower limit	Charge temperature 0-45°C declared. -5°C used for lower limit tests. 45°C used for upper limit tests	P
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1) ..... :		P
	For a different upper limit charging voltage (i.e. other than for lithium cobalt oxide systems at 4,25 V), the applied upper limit charging voltage and upper limit charging temperatures were adjusted accordingly	Lithium cobalt oxide system only.	N/A
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1) ..... :		N/A
8.2	Intended use		P
8.2.1	Continuous charging at constant voltage (cells)	Tested complied.	P
	Results: No fire. No explosion..... :	(See Table 8.2.1)	P
8.2.2	Moulded case stress at high ambient temperature (battery)	No moulded case exists.	N/A
	Oven temperature (°C)..... :		—

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	Results: No physical distortion of the battery casing resulting in exposure of internal components		N/A
8.3	Reasonably foreseeable misuse		P
8.3.1	External short circuit (cell)	Tested complied.	P
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		N/A
	- The case temperature declined by 20% of the maximum temperature rise		P
	Results: No fire. No explosion..... :	(See Table 8.3.1)	P
8.3.2	External short circuit (battery)	Tested complied.	P
	The batteries were tested until one of the following occurred: - 24 hours elapsed; or		P
	- The case temperature declined by 20% of the maximum temperature rise		N/A
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N/A
	Results: No fire. No explosion..... :	(See Table 8.3.2)	P
8.3.3	Free fall	Tested complied.	P
	Results: No fire. No explosion.	No fire. No explosion.	P
8.3.4	Thermal abuse (cells)		P
	The cells were held at 130°C ± 2°C for: - 10 minutes; or	Tested complied.	P
	- 30 minutes for large cells (gross mass of more than 500 g as defined in IEC 62281)		N/A
	Oven temperature (°C)..... :	130°C	—
	Gross mass of cell (g) ..... :	<500g, small cell.	—
	Results: No fire. No explosion.	No fire. No explosion.	P
8.3.5	Crush (cells)		P
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or	Tested complied.	P
	- An abrupt voltage drop of one-third of the original voltage has been obtained; or		N/A
	- 10% of deformation has occurred compared to the initial dimension		N/A
	Results: No fire. No explosion..... :	(See Table 8.3.5)	P

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
8.3.6	Over-charging of battery		P
	Test was continued until the temperature of the outer casing: - Reached steady state conditions (less than 10°C change in 30-minute period); or		N/A
	- Returned to ambient		P
	Results: No fire. No explosion..... :	(See Table 8.3.6)	P
8.3.7	Forced discharge (cells)		P
	Results: No fire. No explosion..... :	(See Table 8.3.7)	P
8.3.8	Transport tests		P
	Manufacturer's documentation provided to show compliance with UN Recommendations on Transport of Dangerous Goods	Tested complied.	P
8.3.9	Design evaluation – Forced internal short circuit (cells)	Tested complied.	P
	The cells complied with national requirement for .....:	France, Japan, Republic of Korea and Switzerland.	—
	The pressing was stopped upon: - A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	800N for cylindrical cells.	P
	Results: No fire ..... :	(See Table 8.3.9)	P
9	**Information for safety**		**P**
	The manufacturer of secondary cells ensures that information is provided about current, voltage and temperature limits of their products.	Information for safety mentioned in manufacturer's specifications.	P
	The manufacturer of batteries ensures that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards.	Information for safety mentioned in manufacturer's specifications.	P
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, information relating to hazard avoidance resulting from a system analysis is provided to the end user ..... :		N/A
10	**Marking**		**P**
10.1	Cell marking		N/A

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	Cells marked as specified in the applicable cell standards: IEC 61951-1, IEC 61951-2 or IEC 61960.	The final product is battery.	N/A
10.2	Battery marking		P
	Batteries marked in accordance with the requirements for the cells from which they are assembled.	The battery is marked in accordance with IEC 61960, also see page 4.	P
	Batteries marked with an appropriate caution statement.		P
10.3	Other information		P
	Storage and disposal instructions marked on or supplied with the battery.		N/A
	Recommended charging instructions marked on or supplied with the battery.	Information for recommended charging instructions mentioned in manufacturer's specifications.	P
11	**Packaging**		**P**
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants.		P
Annex A	**Charging range of secondary lithium ion cells for safe use**		**P**
A.1	General		P
A.2	Safety of lithium-ion secondary battery	Complied.	P
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General		P
A.3.2	Upper limit charging voltage		P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied	4.25V applied.	N/A
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 0-45°C	P

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
A.4.3	High temperature range	Not higher than the temperature range specific in this standard.	N/A
A.4.3.1	General		N/A
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in high temperature range		N/A
A.4.3.4	Safety consideration when specifying new upper limit in high temperature range		N/A
A.4.4	Low temperature range	Charging low temperature declared by client is: 0°C.	P
A.4.4.1	General		P
A.4.4.2	Explanation of safety viewpoint		P
A.4.4.3	Safety considerations, when specifying charging conditions in low temperature range		P
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range	-5°C applied.	P
A.4.5	Scope of the application of charging current		P
A.5	Sample preparation		P
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
	The insertion procedure carried out at 20°C±5°C and under -25 °C of dew point		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P
A.5.5	Insertion of nickel particle to cylindrical cell		P
A.5.5.1	Insertion of nickel particle to winding core		P
A.5.5.2	Mark the position of nickel particle on the both end of winding core of the separator		P
A.5.6	Insertion of nickel particle to prismatic cell		N/A

	TABLE: Critical components information				P
Object/part no.	**Manufacturer/ trademark**	**Type/model**	**Technical data**	**Standard**	**Mark(s) of conformity** [1)]
Cell	Sumsung	ICR18650-22PM	3.6Vdc, 2200mAh	IEC 62133: 2012	Tested with appliance
-Electrolyte	Interchangeable	Interchangeable	$LiPF_6$, EC, EMC, DMC	--	--
-Separator	Interchangeable	Interchangeable	Shutdown temperature: 180°C, PP+PE	--	--
-Positive electrode	Interchangeable	Interchangeable	LiCoO2, PVDF	--	--
-Negative electrode	Interchangeable	Interchangeable	C, S-P, CMC, SBR	--	--
-Negative can	Interchangeable	Interchangeable	18.3mm*68.05mm, Steel	--	--
-Assembly cap	Interchangeable	Interchangeable	External diameter: 17.5mm, Height: 3.8mm, pressure for cutoff current: 1.0-1.5MPa, Rupture pressure: 1.8-2.8MPa	--	--
PCM	Shenzhen Elite Electronic Co., ltd	HY-HZQ-1002A	Over charge detection voltage:42.5±0.5V, Over discharge detection voltage: 25.0±1.0V, Over current detection current:16A-20A	--	--
-PCB	SHENZHEN MEIYADI ELECTRONICS CO LTD	MYD-2	130°C, V-0	UL 94 UL 796	UL E348865
-IC(U4-U13)	Seiko	S-8261ACBMD-G4BT2G	Over charge detection voltage:4.25±0.05V, Over discharge detection voltage: 2.5±0.1V, Over current detection current: 8A-10A, Over current detection voltage: 0.5V , Topr: -40-85 ºC	--	Tested with appliance
-MOSEFET (M1-M4)	HOUYI	IRFB3607	VDSS: 60V, VGSS: ±25V, ID:120A, Tstg: -55-170 ºC	--	Tested with appliance
Wiring connecting with P+, P-	DONGGUAN YUE ZHEN WIRE & CABLE CO LTD	3135	200 ºC, 600Vac, 14AWG	UL 758	UL E354338

Wiring	SHENZHEN XINRUI ELECTRIC PRODUCTS CO LTD	1007	80 ºC, 300Vac, 24AWG	UL 758	UL E477322
Heat shrinkable tubing	DONG GUAN HUANG FENG INSULATION MATERIAL CO LTD	HFT-2	Φ8.0, VW-1, 600V, 125ºC	UL 224	UL E236485
Connector (yellow)	NUOXIER	XT60	V-1, 80ºC	--	--
Connector(white)	JAPAN SOLDERLESS TERMINAL MFG CO LTD	PHR-10	10pin, 85ºC	--	--
Supplementary information: **[1] Provided evidence ensures the agreed level of compliance.**					

7.2.1	TABLE: Continuous low rate charge (cells)				N/A
Model	**Recommended charging method, (CC, CV, or CC/CV)**	**Recommended charging voltage V_c, (Vdc)**	**Recommended charging current I_{rec}, (A)**	**OCV at start of test, (Vdc)**	**Results**

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

7.2.2	TABLE: Vibration		N/A
Model	**OCV at start of test, (Vdc)**	**Results**	

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

7.3.1	TABLE: Incorrect installation (cells)		N/A
Model	**OCV of reversed cell, (Vdc)**	**Results**	

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

7.3.2	TABLE: External short circuit				N/A
Model	**Ambient (at 20°C ± 5ºC or 55°C ± 5°C)**	**OCV at start of test, (Vdc)**	**Resistance of circuit, (Ω)**	**Maximum case temperature rise ΔT, (°C)**	**Results**

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

7.3.6	TABLE: Crush		N/A
Model	**OCV at start of test, (Vdc)**	**OCV at removal of crushing force, (Vdc)**	**Results**

Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)

7.3.8	**TABLE: Overcharge**			**N/A**
Model	**OCV prior to charging, (Vdc)**	**Maximum charge current, (A)**	**Time for charging, (hours)**	**Results**
Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)				

7.3.9	**TABLE: Forced discharge (cells)**			**N/A**
Model	**OCV before application of reverse charge, (Vdc)**	**Measured reverse charge I_t, (A)**	**Time for reversed charge, (minutes)**	**Results**
Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)				

8.2.1	TABLE: Continuous charging at constant voltage (cells)			P
Model	**Recommended charging voltage V_c, (Vdc)**	**Recommended charging current I_{rec}, (A)**	**OCV at start of test, (Vdc)**	**Results**
Cell #1	4.2	1.075	4.17	P
Cell #2	4.2	1.075	4.18	P
Cell #3	4.2	1.075	4.17	P
Cell #4	4.2	1.075	4.17	P
Cell #5	4.2	1.075	4.18	P

Supplementary information:

- No fire or explosion
- No leakage

8.3.1	TABLE: External short circuit (cell)				P
Model	**Ambient, (°C)**	**OCV at start of test, (Vdc)**	**Resistance of circuit, (Ω)**	**Maximum case temperature rise ΔT, ~~(°C)~~**	**Results**
Samples charged at charging temperature upper limit (45°C)					
Cell #1	24.7	4.21	0.076	99.3	P
Cell #2	23.8	4.20	0.088	95.9	P
Cell #3	23.6	4.20	0.073	82.2	P
Cell #4	22.5	4.20	0.083	99.0	P
Cell #5	23.1	4.21	0.075	101.3	P
Samples charged at charging temperature lower limit (-5°C)					
Cell #6	23.4	4.19	0.070	100.5	P
Cell #7	22.8	4.19	0.088	101.1	P
Cell #8	23.4	4.18	0.073	102.7	P
Cell #9	23.2	4.19	0.083	96.9	P
Cell #10	23.2	4.19	0.078	98.4	P

Supplementary information:

- No fire or explosion

8.3.2	TABLE: External short circuit (battery)				P
Model	**Ambient, (°C)**	**OCV at start of test, (Vdc)**	**Resistance of circuit, (Ω)**	**Maximum case temperature rise ΔT, ~~(°C)~~**	**Results**
Samples charged at charging temperature upper limit (45°C)					
Battery #1	55.4	42.1	0.070	1.4	P
Battery #2	55.4	42.2	0.088	1.2	P
Battery #3	55.2	42.1	0.073	1.2	P
Battery #4	55.2	42.0	0.083	1.3	P
Battery #5	55.2	42.1	0.075	1.1	P
Samples charged at charging temperature lower limit (-5°C)					
Battery #6	54.8	41.7	0.075	1.6	P
Battery #7	54.9	41.8	0.070	1.4	P
Battery #8	54.3	41.7	0.073	2.0	P
Battery #9	54.9	41.9	0.088	1.9	P
Battery #10	54.8	41.9	0.083	1.6	P

Supplementary information:

- No fire or explosion

8.3.5	TABLE: Crush				P
Model	**OCV at start of test, (Vdc)**	**OCV at removal of crushing force, (Vdc)**	**Width/ diameter of cell before crush, (mm)**	**Required deformation for crush, (mm)**	**Results**
Samples charged at charging temperature upper limit (45°C)					
Cell #1	4.21	4.20	--	--	P
Cell #2	4.21	4.21	--	--	P
Cell #3	4.20	4.20	--	--	P
Cell #4	4.20	4.20	--	--	P
Cell #5	4.20	4.20	--	--	P

Note:

A 13kN force applied at the longitudinal axis parallel of the cylindrical cell

No voltage abrupt drop occurred.

Supplementary information:

- No fire or explosion

8.3.6	TABLE: Over-charging of battery				P
Constant charging current (A).....:		8.8			—
Supply voltage (Vdc).....:		50			—
Model	**OCV before charging, (Vdc)**	**Resistance of circuit, (mΩ)**	**Maximum outer casing temperature, (°C)**	**Results**	
Battery #1	33.21	88	47.8	P	
Battery #2	33.16	76	46.1	P	
Battery #3	33.18	80	43.2	P	
Battery #4	33.21	74	47.1	P	
Battery #5	33.22	82	47.8	P	
Supplementary information: - No fire or explosion					

8.3.7	TABLE: Forced discharge (cells)			P
Model	**OCV before application of reverse charge, (Vdc)**	**Measured Reverse charge I_t, (A)**	**Time for reversed charge, (minutes)**	**Results**
Cell #1	3.31	2.2	90	P
Cell #2	3.31	2.2	90	P
Cell #3	3.31	2.2	90	P
Cell #4	3.31	2.2	90	P
Cell #5	3.31	2.2	90	P
Supplementary information: - No fire or explosion				

8.3.8 T-5	TABLE: External short circuit (cell)				P
Model	**Ambient, (°C)**	**OCV at start of test, (Vdc)**	**Resistance of circuit, (Ω)**	**Maximum case temperature rise ΔT~~, (°C)~~**	**Results**
Cell #1	54.9	4.14	0.070	69.6	P
Cell #2	54.8	4.15	0.080	71.6	P
Cell #3	54.0	4.15	0.083	75.2	P
Cell #4	54.3	4.13	0.085	73.5	P
Cell #5	55.1	4.14	0.088	62.8	P
Cell #6	54.6	4.13	0.073	72.9	P
Cell #7	54.5	4.14	0.075	60.8	P
Cell #8	54.5	4.14	0.080	61.9	P
Cell #9	54.7	4.14	0.070	70.2	P
Cell #10	54.7	4.14	0.078	66.3	P

Supplementary information:

The external short-circuit test of 10 pcs samples performed after the test of Altitude, Thermal cycling, Vibration and Shock in sequence.

-No excessive temperature rise, no rupture, no explosion and no fire

8.3.9	TABLE: Forced internal short circuit (cells)					P
Model	**Chamber ambient, (°C)**	**OCV at start of test, (Vdc)**	**Particle location [1)]**	**Maximum applied pressure, (N)**	**Voltage drop, (mV)**	**Results**
Cell #1	10	4.178	1	834.9	2	P
Cell #2	10	4.179	1	835.7	1	P
Cell #3	10	4.172	1	840.1	2	P
Cell #4	10	4.173	2	841.3	1	P
Cell #5	10	4.185	2	836.8	1	P
Cell #6	45	4.209	1	832.3	1	P
Cell #7	45	4.200	1	841.7	1	P
Cell #8	45	4.201	1	840.9	2	P
Cell #9	45	4.201	2	850.1	1	P
Cell #10	45	4.200	2	846.6	1	P

Supplementary information:

[1)] Identify one of the following**:**

1: Nickel particle inserted between positive and negative (active material) coated area.

2: Nickel particle inserted between positive aluminium foil and negative active material coated area.

- No fire.

-- End of Report --

Product: Rechargeable Li-ion Battery

Type Designation: HY10S2P

Figure 1 Front view of battery

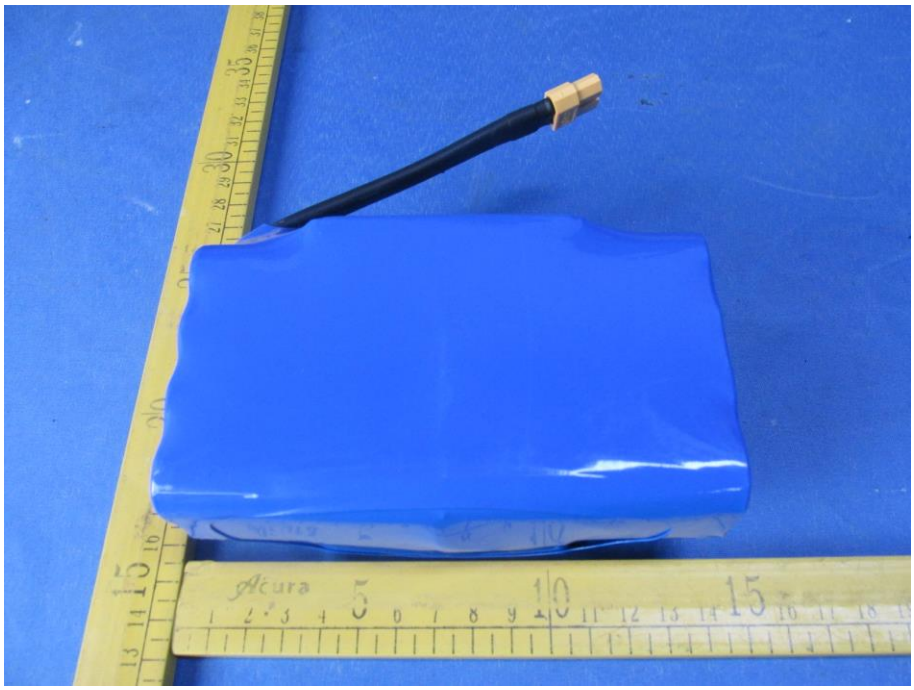

Figure 2 Back view of battery

Product: Rechargeable Li-ion Battery

Type Designation: HY10S2P

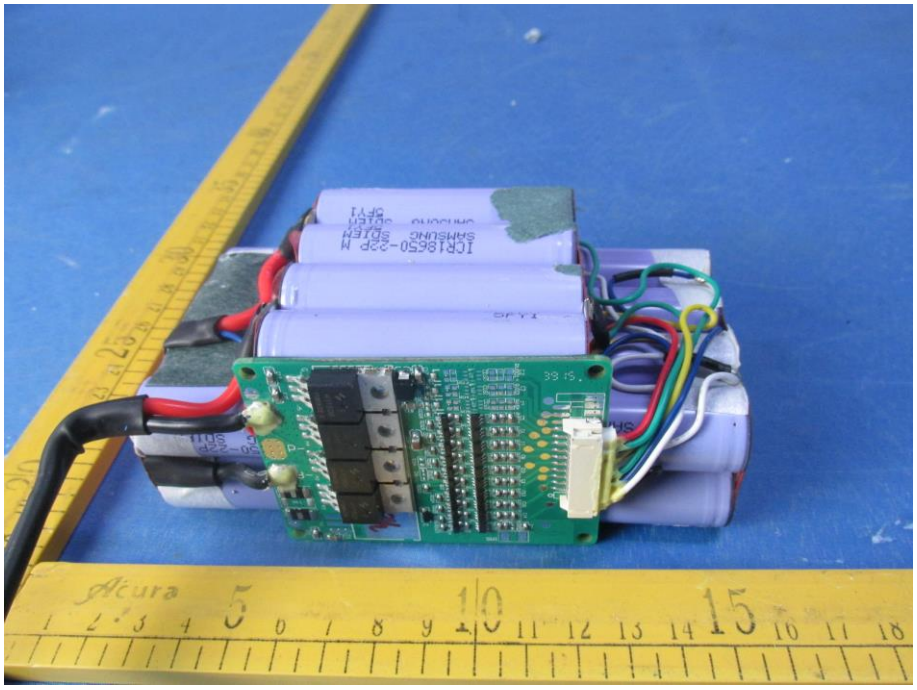

Figure 3 Inside view of battery

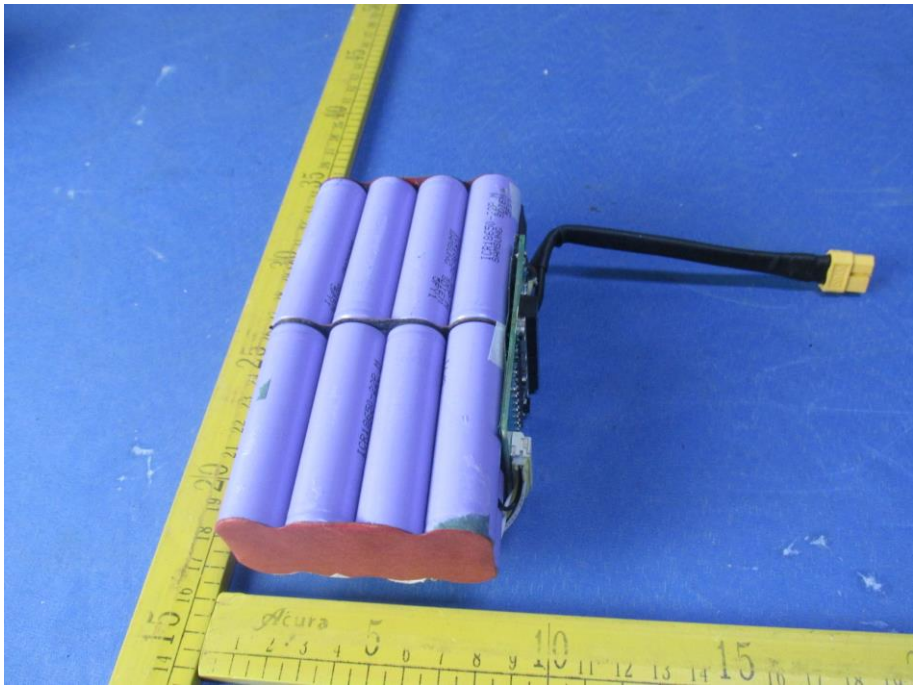

Fig.4- Inside view of battery

Product: Rechargeable Li-ion Battery

Type Designation: HY10S2P

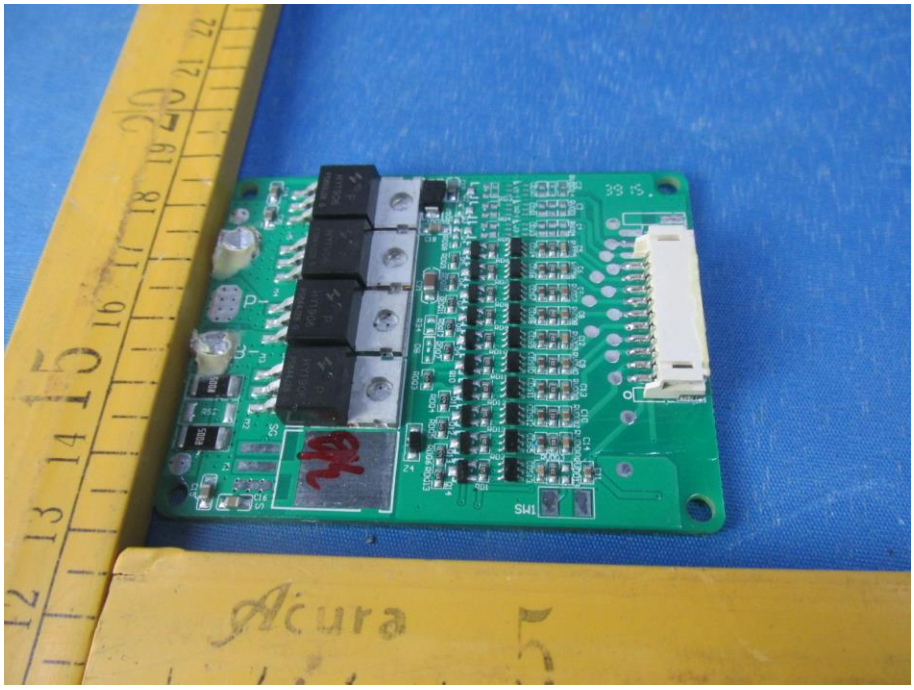

Figure 5 Component view of PCB

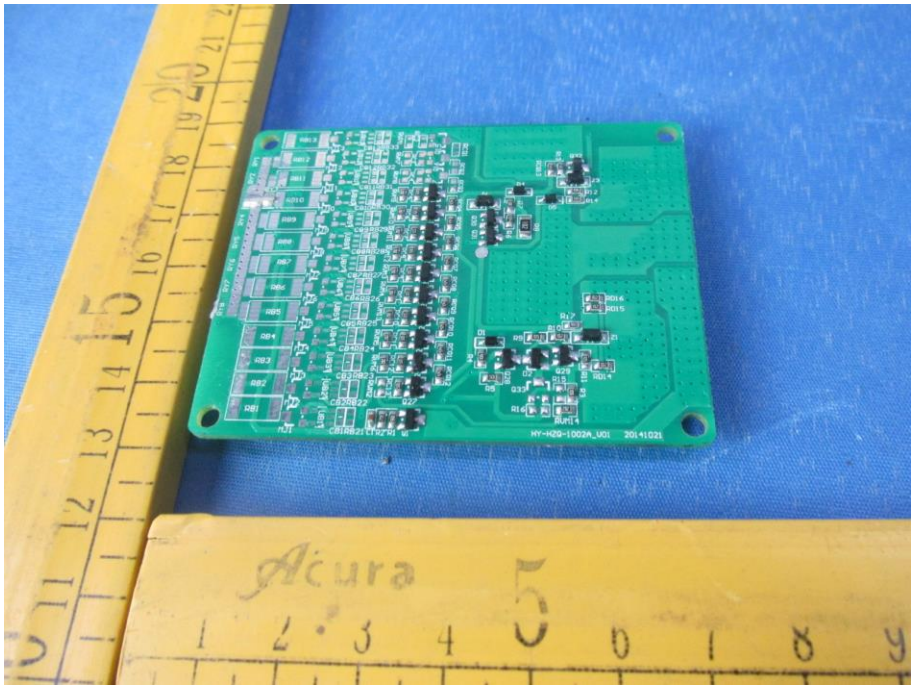

Figure 6 Trace view of PCB

Product: Rechargeable Li-ion Battery

Type Designation: HY10S2P

Figure 7 Front overview of cell

Figure 8 Top view of cell