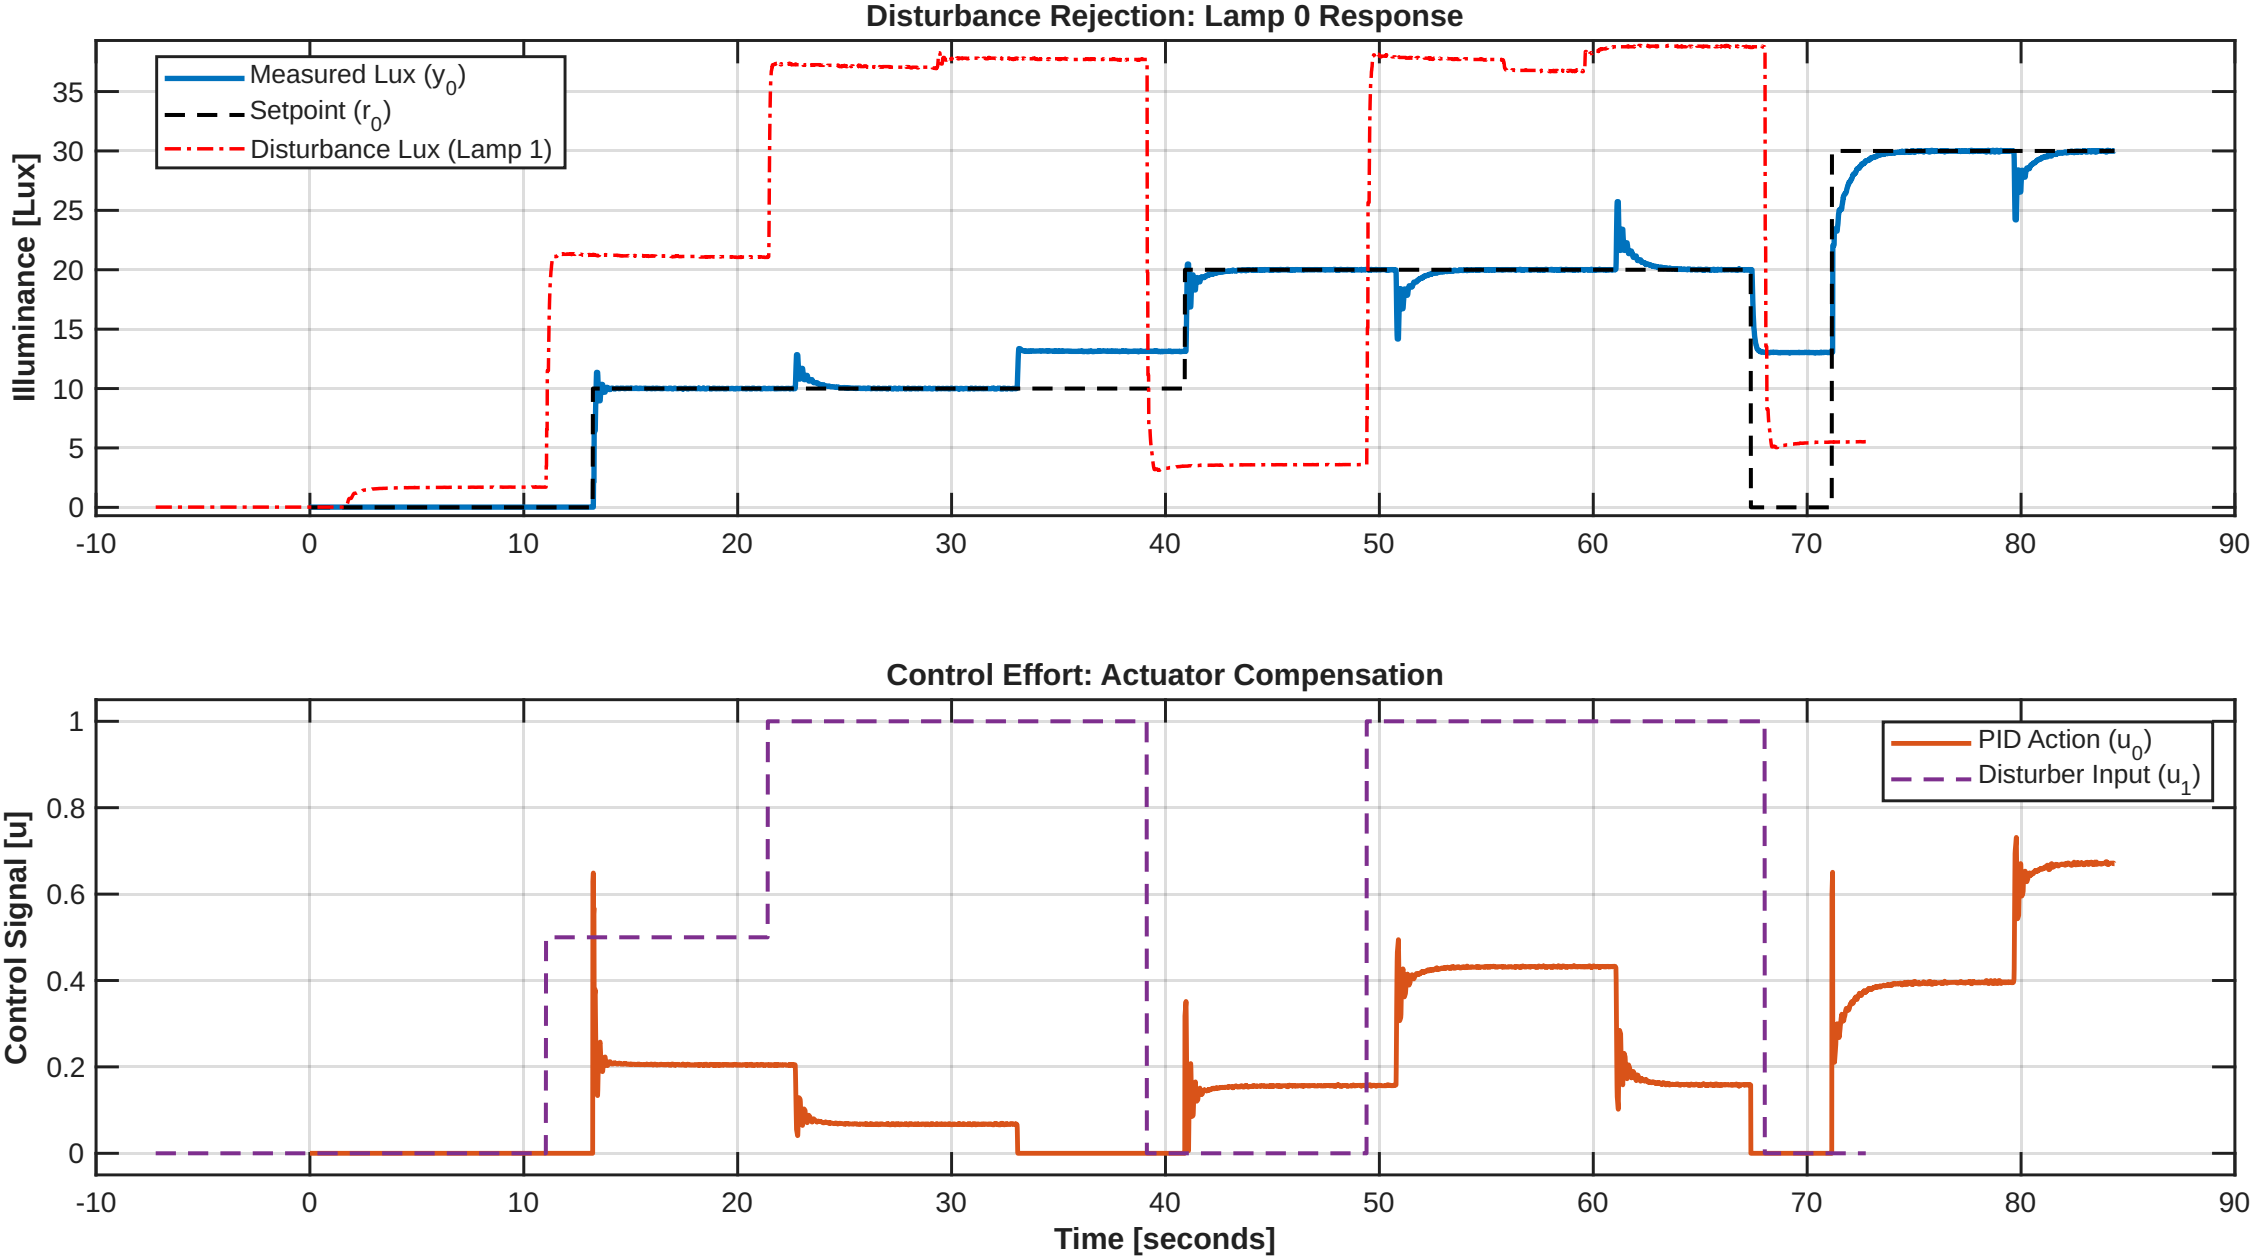
Disturbance Rejection: Lamp 0 Response
Measured Lux ($y_0$)
Setpoint ($r_0$)
Disturbance Lux (Lamp 1)
Illuminance [Lux]
35
30
25
20
15
10
5
0
-10
0
10
20
30
40
50
60
70
80
90
Control Effort: Actuator Compensation
PID Action ($u_0$)
Disturber Input ($u_1$)
Control Signal [u]
1
0.8
0.6
0.4
0.2
0
Time [seconds]