




Over Easy Solar



Follow us

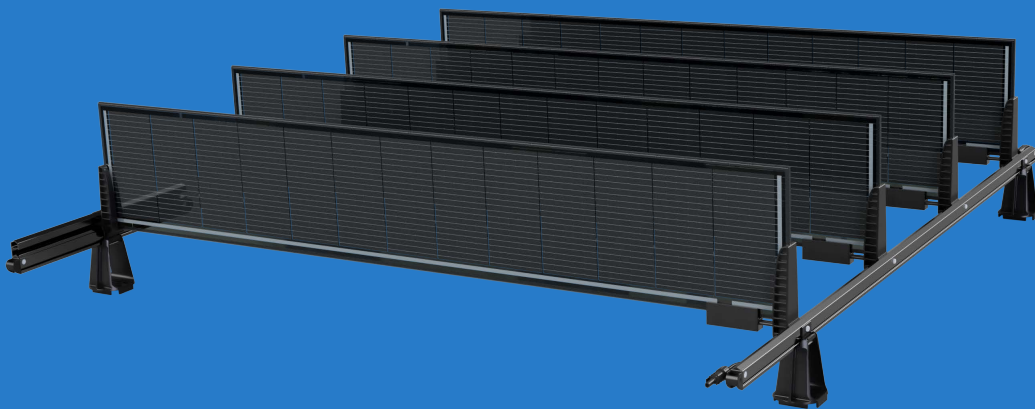

Contact us

Email : office@sempergreen.com

Website : <https://www.sempergreen.com/us>


The VPV Unit

The Over Easy Solar Solution is a lightweight PV system for flat and green roofs, maximizing energy production while maintaining roof functionality. It allows easy installation, maintenance, and inspections, ensuring compliance with building protocols.

Mounting options:

- **LM (Low-Mounted)** – For flat roofs, compatible with various materials.
- **HM (High-Mounted)** – For green roofs, supporting plant health, biodiversity, and water retention.

Green Roof Application using BioFeet120 bases (4.75" standoff)

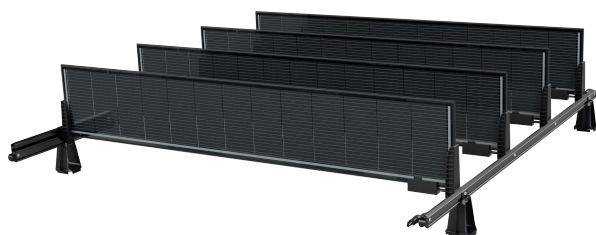

Partial shading by panels reduces heat by up to **18° Fahrenheit** and evaporation on the green roof, prevents dry-out during long periods without precipitation




Benefits from the lower temperature of the green environment for increased energy yields of up to **17%**



You can install or **retrofit** your green roof with solar without perforating roofing membranes or structure. Having full access to the roof makes it easy to inspect, maintain and repair

Flat Roof Application using Std60 bases (2.325" standoff)

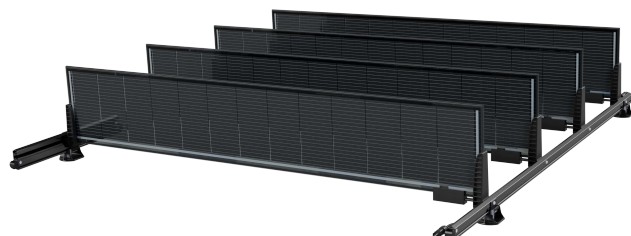

The lightweight system only adds **2.5 lbs./SF** making it easier to install on various types of roofs.



The roof's reflection (Albedo) can increase energy production by more than **30%** on bright surfaces.



Over Easy units give you **full access** to inspect, maintain and, if needed, repair the integrity of your flat roof.

Installation

The innovative premanufactured vertical solar unit simplifies transport and installation, offering a faster, more efficient alternative to conventional solar panels. Its prefabricated design enables seamless integration and rapid deployment, optimizing solar energy solutions for enhanced performance and scalability.



Easy to handle pre-assembled unit that integrates PV-modules, electrical cabling and mounting structure



One pallet covers 862 SF



Plug and play with integrated cable management





No tools needed for installation



Installation up to 10x faster with 15 min per kWp



Easy planning and logistics with 33 units on a pallet

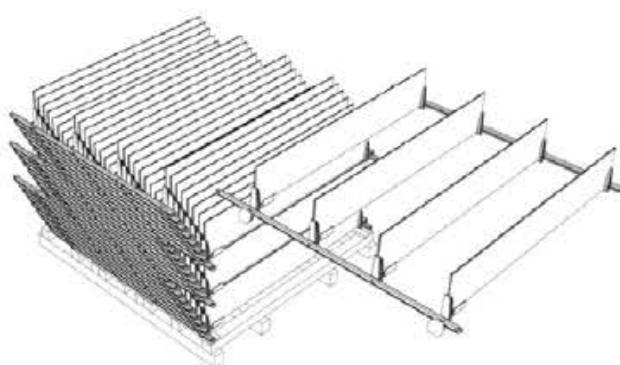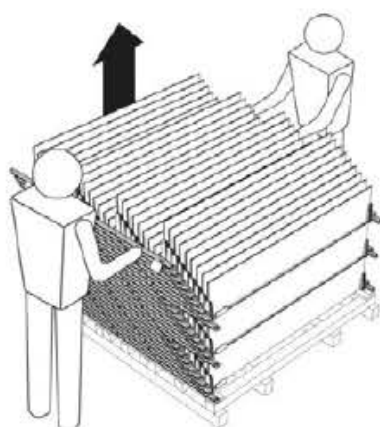


[Watch our installation guide video here](#)



European Footprint

30 installations and sales in 11 European countries

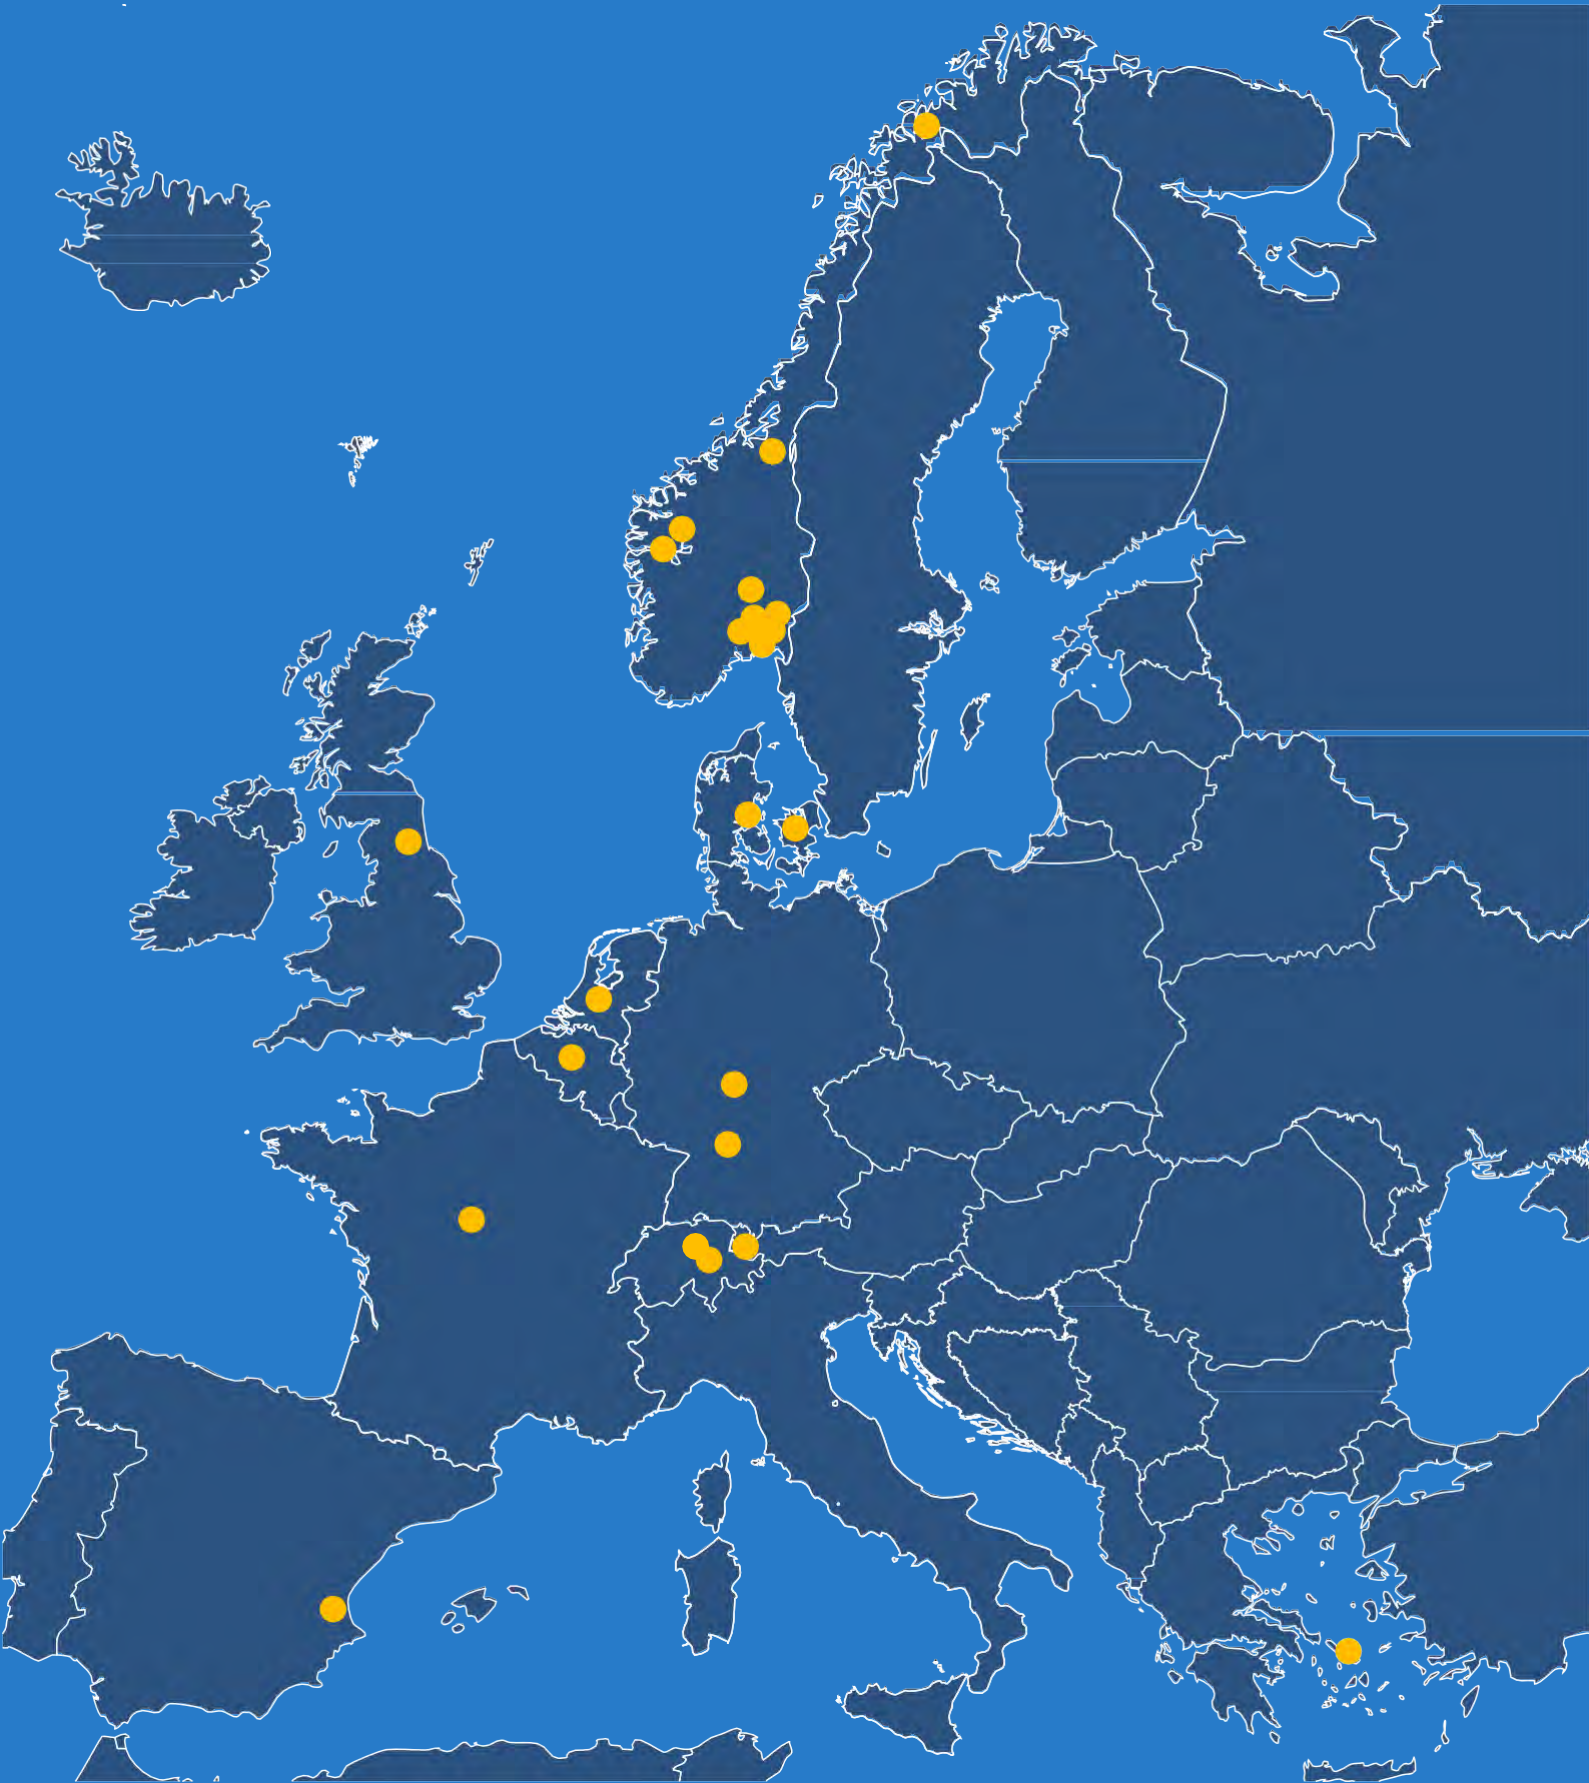

Løren Skole

Oslo, Norway

- ♦ 46.2 kWp
- ♦ 206 Units
- ♦ HM Feet

**Project installed with 200 watt units*



Bilia Vollebekk

OverEasy
Solar

sempergreen

Oslo, Norway

- 102.2 kWp
- 511 Units
- HM Feet

**Project installed with 200 watt units*



Aker Tech House

Oslo, Norway

- 45.8 kWp
- 229 Units
- HM Feet

**Project installed with 200 watt units*



Lyngby

Lyngby, Denmark

- ♦ 8.8 kWp
- ♦ 44 Units
- ♦ HM Feet

**Project installed with 200 watt units*



Blussuvoll skole

Trondheim, Norway

- 50 kWp
- 250 Units
- HM Feet

**Project installed with 200 watt units*



Bühlstrasse

Beinwill am See, Switzerland

- 9 kWp
- 45 Units
- HM Feet

**Project installed with 200 watt units*




UIB Juss

Bergen, Norway

- ♦ 32.8 kWp
- ♦ 164 Units
- ♦ LM Feet

**Project installed with 200 watt units*

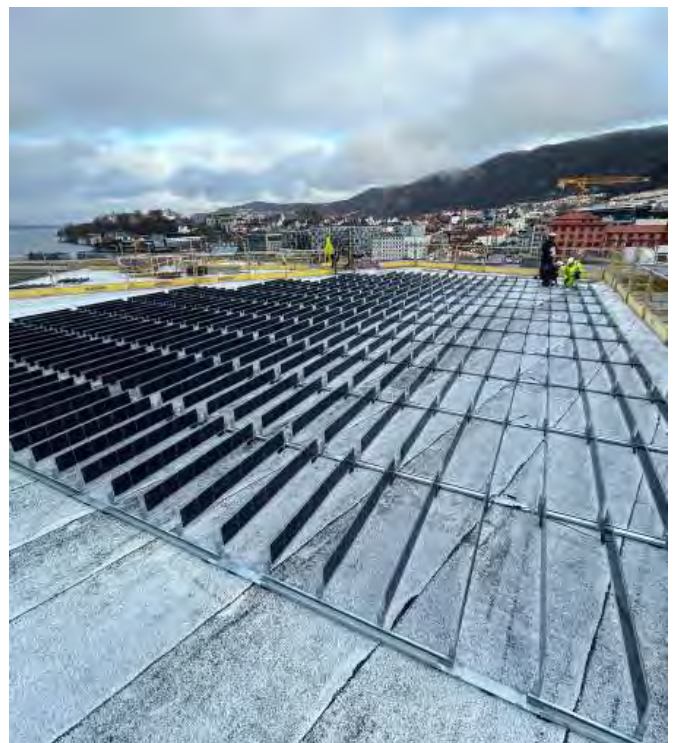

Wolsanger Feuerwehr

Kassel, Germany

- 19.8 kWp
- 99 Units
- HM Feet

**Project installed with 200 watt units*



Industriestrasse

Hard, Austria

- ♦ 6.8 kWp
- ♦ 34 Units
- ♦ HM Feet

**Project installed with 200 watt units*



Ullevaal stadion

Oslo, Norway



- 248.4 kWp
- 1242 Units
- LM Feet

**Project installed with 200 watt units*




Energy Profile


The Over Easy solution stands out from conventional solar energy systems with its unique energy production profile, featuring two peak production cycles per day, extended productive hours throughout the year, and superior performance in winter and dusty conditions. This innovative design generates more energy in the morning and evening, when electricity demand and prices are typically higher, optimizing cost savings and maximizing self-consumption for greater energy efficiency.

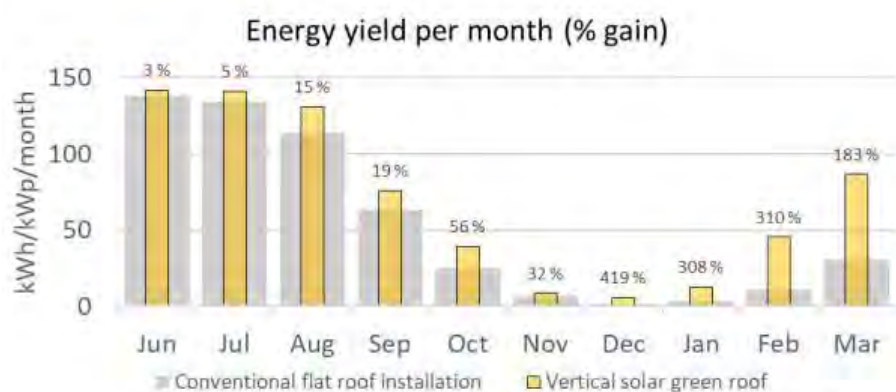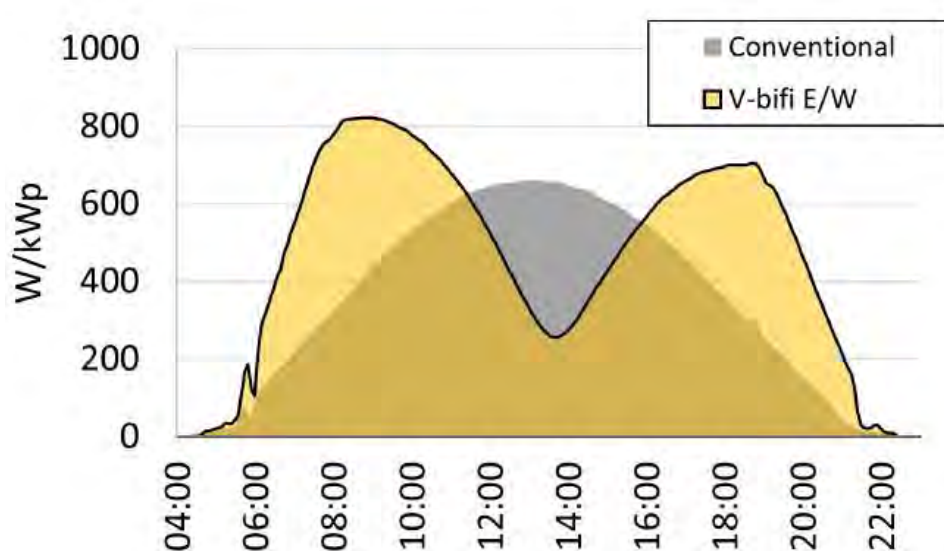

6 June 2022

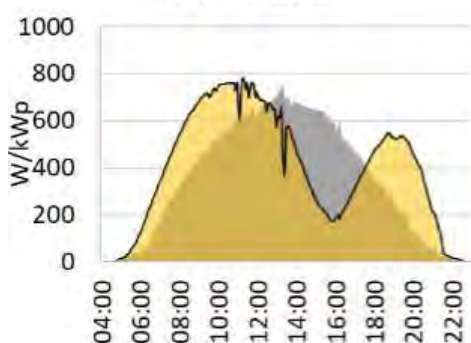


1 March 2023

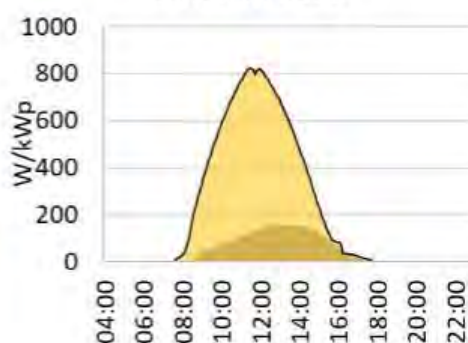


Wind Resistance

Our innovative solution eliminates the need for ballast and generates no lift force. Each project is meticulously engineered, considering wind zone, terrain category, building dimensions, and PV array size to ensure optimal performance and stability. The system has been rigorously tested and validated in accordance with EN 1991-1-4 Wind Actions, the standard for structural wind load assessments. These tests were conducted in collaboration with the I.F.I. Institute for Industrial Aerodynamics and the Fraunhofer Institute, ensuring compliance with industry-leading aerodynamics and structural safety standards.

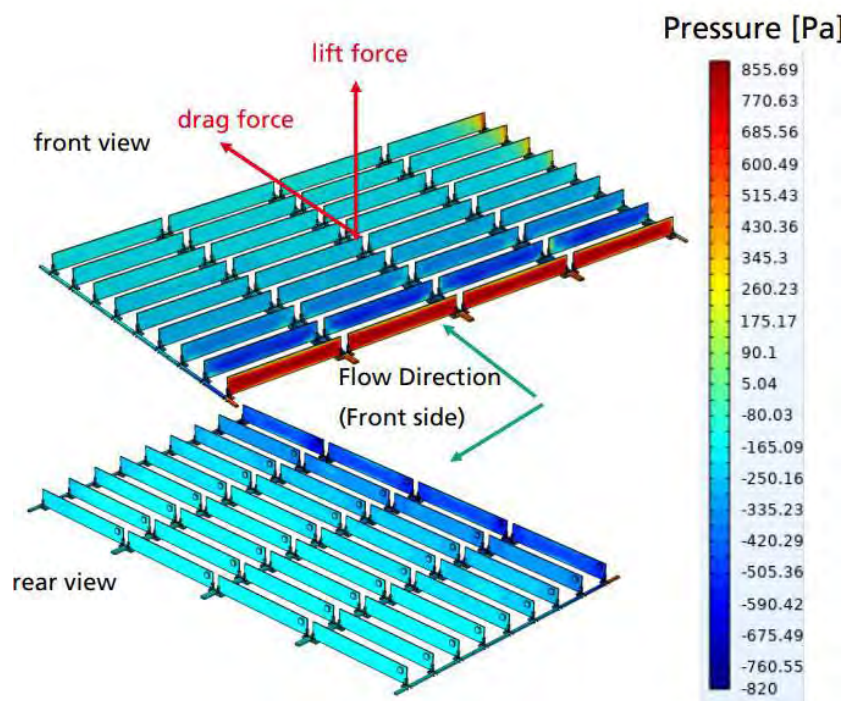

Wind flow pattern showing low wind between panles

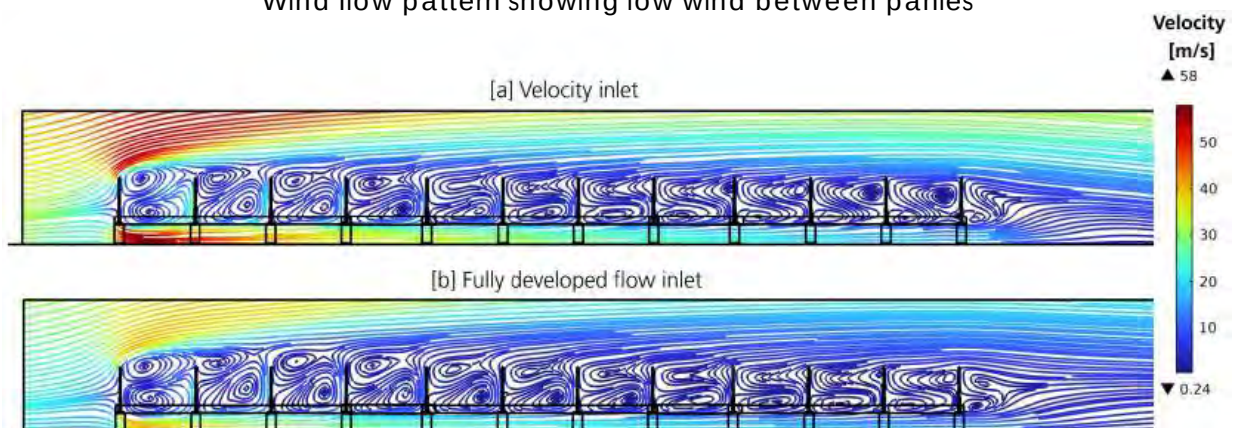

Fire Safety

The Over Easy solution significantly reduces the risk of fire spread. Unlike traditional flat-panel systems, its vertical VPV design prevents flames from spreading beneath the panels, allowing the roofing membrane to retain its natural fire-resistant properties. As a result, Over Easy Solar panels do not increase fire risks on flat roofs, offering a safer and more reliable solution for solar energy integration.



Fire test: Fire spread beneath low-angle panels but was contained with vertical ones.



Product Details

Electrical Data

Parameter

Registered Trade Name	Over Easy Solar AS
Model	xM-3 QUATTRO-260S
Max. Power at STC (Pmax)	256 Wp
Power Tolerance	± 3%
Max. Power Voltage (Vmpp)	33.04 V (Preliminary)
Max. Power Current (Impp)	8.85 A (Preliminary)
Open-circuit Voltage (Voc)	39.04 V ± 3% (Preliminary)
Short-circuit Current (Isc)	8.13 A ± 3% (Preliminary)
Cell Efficiency	≥ 25.4%
Temperature Coefficient of Pmpp (αPmpp)	-0.24 %/°C
Temperature Coefficient of Voc (αVoc)	-0.22 %/°C
Temperature Coefficient of Isc (αIsc)	0.04 %/°C
Reverse Current Rating	20 A
Max. Overcurrent Protection Rating	20 A
STC Conditions -	1000 W/m², 25±2°C, AM 1.5 per IEC 60904-3
BNPI Note - E	front = 1000 W/m², Erear = 135 W/m²

Value

Working Conditions

Parameter

Max. System Voltage (Vsys)	1000 V DC
Operating Temperature	-40°C to +85°C
Electrical Protection Class	Class II
Fire Safety Class	Class B
Roof Angle	up to 10 degrees

Value




1000 V DC
-40°C to +85°C
Class II
Class B
up to 10 degrees

Mechanical Data

Parameter

Cell Technology	Silicon heterojunction (HJT)
Cell Arrangement	52 (13 × 4)
Dimensions (STD60 Foot)	5 ft 2.2 in × 4 ft 10.9 in × 11.0 in (1580 × 1496 × 280 mm)
Dimensions (BIO120 Foot)	5 ft 2.2 in × 4 ft 10.9 in × 1 ft 1.4 in (1580 × 1496 × 340 mm)
Ground Clearance (BIO120 Foot)	4.7 in (120 mm)
Ground Clearance (STD60 Foot)	2.4 in (60 mm)
Weight	55.1 lbs (25 kg)
Roof Area Covered	25.8 ft² (2.4 m²)
Area Load	2.2 lbs/ft² (10.2 to 10.8 kg/m²)
Glass Technology	2 × 3.2 mm tempered solar glass
Frame Material	Aluminum 6061-T6 anodized + PA66
Design Load	1600 Pa with SF 1.5 (2400 Pa pos/neg)
Junction Box	IP-68, 4 × 1 bypass diode
Cables	0.16 in (4 mm), 9.8 in (25 cm) length
DC Connectors	IP-68
Packaging	27 units per pallet

Value

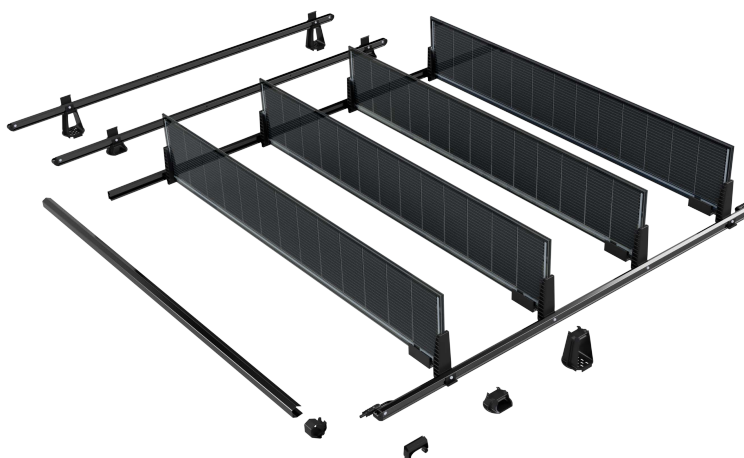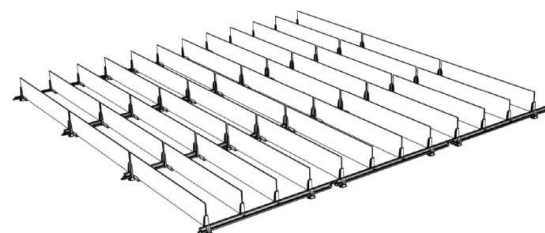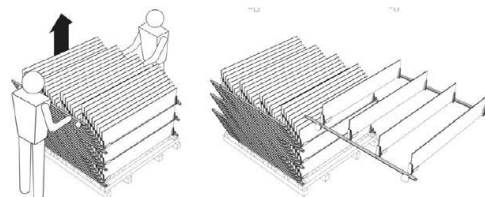

Sustainability



Sustainability is our primary concern, and it is why we founded the company. We have our feet on the ground, we personally inspect our suppliers' facilities, and we have clear guidelines on how our suppliers should source materials and inputs for manufacturing.



Tommy Engvik
CCO and co-founder





Sempergreen USA is in partnership with OverEasy in Norway to introduce the vertical solar system into North America.

Please contact us at: Home office in

Virginia :

sales@sempergreen-usa.com

540-399-5055

Email:

NorthEast , West Coast and Midwest:

Dick@sempergreen-usa.com

301-219-4071

Mid-Atlantic and Southeast:

Callum@sempergreen-usa.com

202-494-0361

Technical Assistance:

Oscar@sempergreen-usa.com

202-215-6005

Contact us

Email : office@sempergreen.com

Website : <https://www.sempergreen.com/us>

