



Over Easy Vertical PV

xM-3 256s

Product Data Sheet



The xM-3 256s VPV unit is a lightweight solar unit consisting of 4 vertical bifacial PV modules on a frame, including electrical wiring and a distributor. The solar panels are made of high-quality hardened glass (2x3.2 mm solar glass with anti-reflective surface) with silicone hetero-junction solar cells. These vertical bifacial PV modules provide a high electricity yield, not only during the summer but also in autumn, winter, and spring, with high performance.

OverEasy Solar VPV Unit (Vertical Photovoltaic System)

Lightweight, ballast-free solar for green and traditional roofs

APPLICATIONS

- Compatible with new or existing extensive green roofs and flat roofs with slopes up to 5°
- Weighs 2.25 lbs./sf, making it ideal for roofs with strict load limits
- Available in three base options:
 - **Std 60 base** - 2.4" (60mm) clearance
 - **Bio 120 base** - with 4.7" (120mm) clearance to preserve extensive green roof vegetation health
 - **Bio 300 base with anchor hooks** - with 11.8" (300mm) clearance for intensive green roofs.
- No ballast or membrane penetration required – system forms a self-locking grid
- Compatible with virtually any membrane or substrate type

DELIVERY & INSTALLATION



- Delivered pre-assembled, palletized, and plug-and-play
- One pallet contains 27 units, covering ~697 sf and delivering 6.6 kWp
- Installation rate: ~15 min/kWp – up to 10× faster than conventional racking
- Electrical tie-in to be completed by a certified electrician

WARRANTY

- Product Warranty: 15 years (against defects)
- Performance Warranty: ≥80% output after 25 years



This data is provided for informational purposes only. This document is not a warranty as to the suitability or the fitness for a specific use or merchantability of products referred to, no guarantee of satisfactory results from reliance upon contained information or recommendation and disclaims all liability from resulting loss or damage. This information is subject to change without notice.

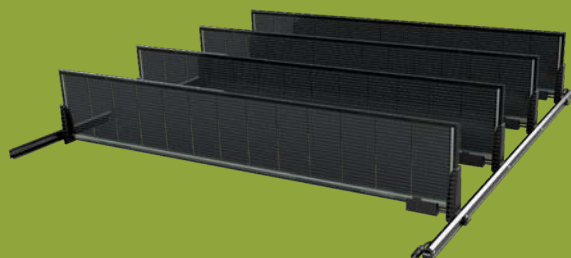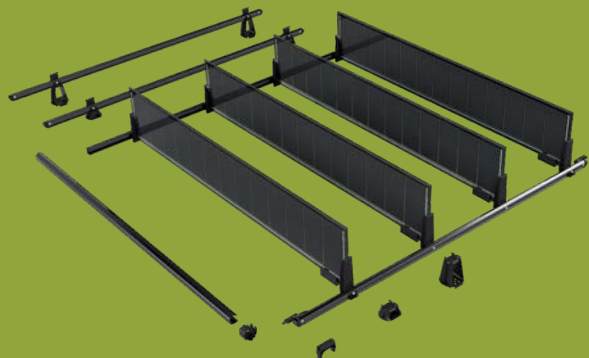

Electrical Data

Parameter

Registered Trade Name	Over Easy Solar AS
Model	xM-3 QUATTRO-256S
Max. Power at STC (Pmax)	256 Wp
Power Tolerance	± 3%
Max. Power Voltage (Vmpp)	33.04 V (Preliminary)
Max. Power Current (Impp)	8.85 A (Preliminary)
Open-circuit Voltage (Voc)	39.04 V ± 3% (Preliminary)
Short-circuit Current (Isc)	8.13 A ± 3% (Preliminary)
Cell Efficiency	≥ 25.4%
Temperature Coefficient of Pmpp (αPmpp)	-0.24 %/°C
Temperature Coefficient of Voc (αVoc)	-0.22 %/°C
Temperature Coefficient of Isc (αIsc)	0.04 %/°C
Reverse Current Rating	20 A
Max. Overcurrent Protection Rating	20 A
STC Conditions -	1000 W/m², 25±2°C, AM 1.5 per IEC 60904-3
BNPI Note - E	front = 1000 W/m², Erear = 135 W/m²

Value

Working Conditions

Parameter

Max. System Voltage (Vsys)	1000 V DC
Operating Temperature	-40°C to +85°C
Electrical Protection Class	Class II
Fire Safety Class	Class B
Roof Angle	up to 10 degrees

Value




Max. System Voltage (Vsys)	1000 V DC
Operating Temperature	-40°C to +85°C
Electrical Protection Class	Class II
Fire Safety Class	Class B
Roof Angle	up to 10 degrees

Mechanical Data

Parameter

Cell Technology	Silicon heterojunction (HJT)
Cell Arrangement	52 (13 × 4)
Dimensions (STD60 Foot)	5 ft 2.2 in × 4 ft 10.9 in × 11.0 in (1580 × 1496 × 280 mm)
Dimensions (BIO120 Foot)	5 ft 2.2 in × 4 ft 10.9 in × 1 ft 1.4 in (1580 × 1496 × 340 mm)
Ground Clearance (BIO120 Foot)	4.7 in (120 mm)
Ground Clearance (STD60 Foot)	2.4 in (60 mm)
Weight	55.1 lbs (25 kg)
Roof Area Covered	25.8 ft² (2.4 m²)
Area Load	2.2 lbs/ft² (10.2 to 10.8 kg/m²)
Glass Technology	2 × 3.2 mm tempered solar glass
Frame Material	Aluminum 6061-T6 anodized + PA66
Design Load	1600 Pa with SF 1.5 (2400 Pa pos/neg)
Junction Box	IP-68, 4 × 1 bypass diode
Cables	0.16 in (4 mm), 9.8 in (25 cm) length
DC Connectors	IP-68
Packaging	27 units per pallet

Value

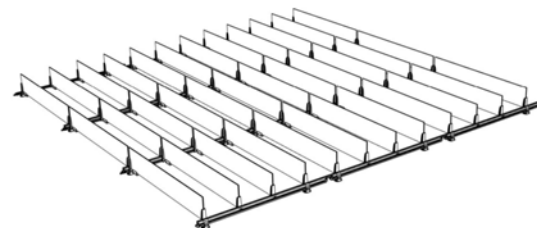

This data is provided for informational purposes only. This document is not a warranty as to the suitability or the fitness for a specific use or merchantability of products referred to, no guarantee of satisfactory results from reliance upon contained information or recommendation and disclaims all liability from resulting loss or damage. This information is subject to change without notice.