





DiaSafe® Glide
Ballasted Fall Protection



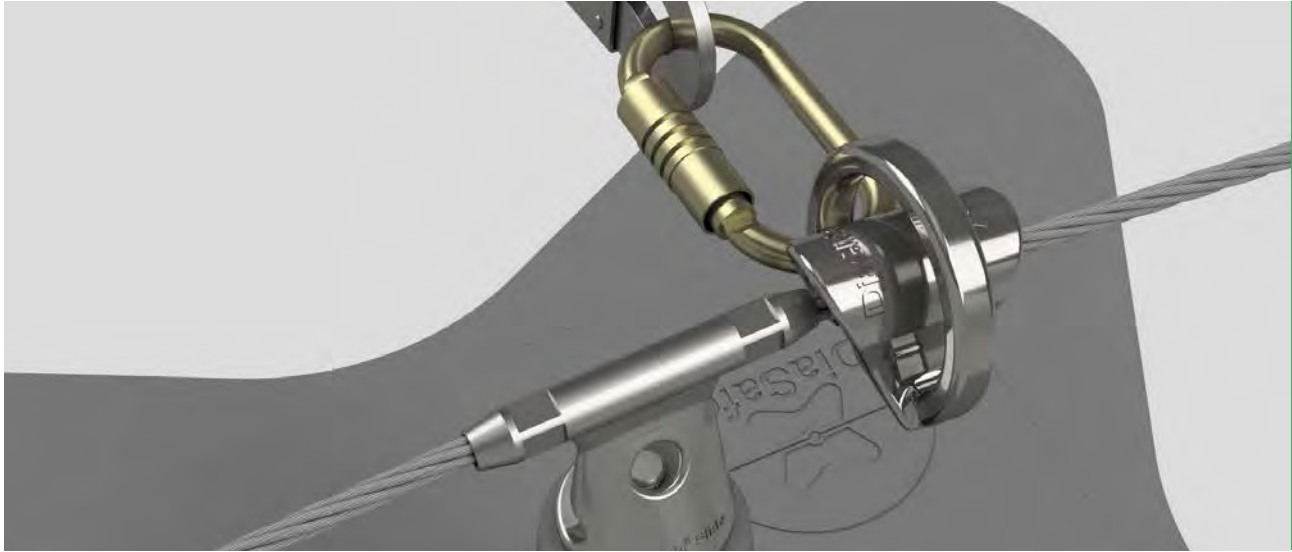

BENEFITS




TRAVERSABLE SYSTEM

Users have maximum freedom of movement, as the DiaGlider travels freely along the cable and over anchor posts without the need to detach and reattach.



FAST AND EASY INSTALLATION

The system consists of a minimal number of components. With appropriate technical skills, it can be installed in a few minutes.



NO THERMAL BRIDGES

Thanks to its special design, there is no thermal bridge between the structure of the building thus saving energy.



SUITABLE FOR MOST TYPES OF FLAT AND LOW-SLOPE ROOFS


The DiaSafe® systems can be installed on traditional or inverted roofs, made out of any structural material (concrete, steel, wood, etc.) and waterproofing membrane (bituminous, PVC, EPDM, TPO, HFA etc.).

www.sempergreen-usa.com



INDUSTRIAL AND COASTAL REGIONS

All components of the DiaSafe® Glide systems are made of materials resistant to acid environments primarily found in industrial areas and salt corrosion in coastal regions.



NO PENETRATIONS

The DiaSafe® systems do not require any mechanical attachment to the roof structure, so the waterproofing and insulation remains intact.





DIASAFE® GLIDE SYSTEM

The standard 118" x 118" damping mat with a ballastweight of 16.7 lbs/sf securely anchors two persons. Two persons may only be anchored to the system in the following scenarios:

1. Both persons use the restraint function.
2. One person uses the restraint function while the other person uses the fall arrest function (as per image below).

The length of the lanyard is adjusted according to the above mentioned scenarios.

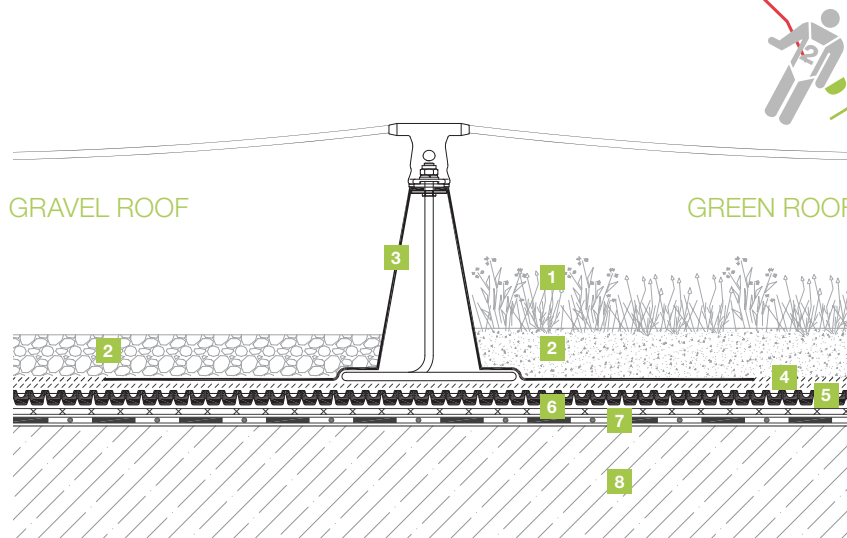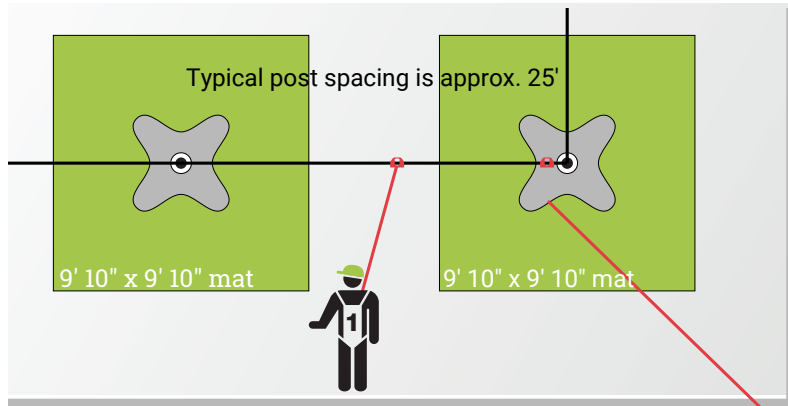

5 max



PERMITTED INCLINATION

The system can be installed on flat at roofs with up to 5° incline.



REMODELLING

The DiaSafe® Glide is an ideal solution for remodeling, as it does not alter the existing structure of the building.



RESTRAINT FUNCTION

Used as a fall restraint system, the protected worker attached cannot reach the exposed edge of the roof. The lanyard length is shorter than the distance between the anchoring point and the edge of the roof.



FALL ARREST FUNCTION

Used as a fall arrest system, the protected worker has maximum freedom of movement into the corners and even over the edge of the roof, as the lanyard length is longer than the distance between the anchoring point and the edge of the roof. If a fall occurs, the system dampens the arrest and holds the person securely.

LAYER BUILD-UP (VARIES)

- 1 Vegetation
- 2 Ballasting material (soil/gravel)
- 3 DiaSafe® damping mat & anchor
- 4 Filter fabric (if specified)
- 5 Drainage and water retention board
- 6 Protection layers/Rigid foam
- 7 Root Barrier (if req'd)
- 8 Existing build-up (roof deck)

Typical Installation Procedure


- 1 Position the system posts at the exact locations indicated in the installation plan. Place the damping plate with integrated damping mat onto the posts.



- 2 Screw the upper part of the post then unfold the damping mat without creases. Spread the ballasting weight evenly, making sure that the weight is sufficient for the surface area of the given DiaSafe system.





- 3 Mount the anchoring head onto the posts. Place cable and hardware as per plans, allowing for correct sag and tension. Then attach the control label and if you are the certified installer, the circular validation sticker onto the cone.

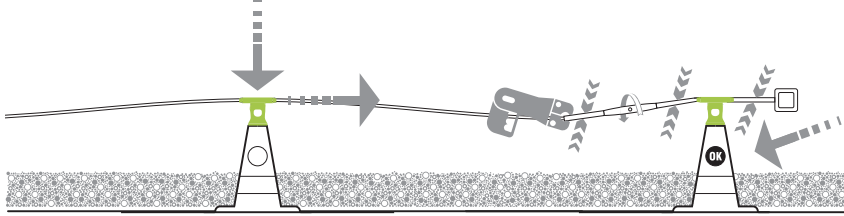

- 4 After installation, use the DIADEM® Online website (reg.diadem.com) or the DS Service Book to document the system!



***ALWAYS FOLLOW PROJECT PLANS
THIS BOOKLET IS NOT A SUBSTITUTE
FOR THE TECHNICAL MANUAL AND FULL
INSTRUCTIONS***

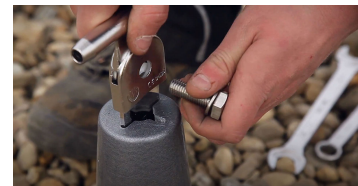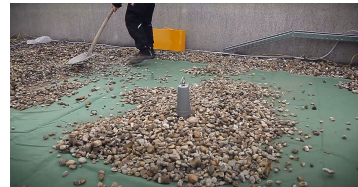

COMPONENTS



DAMPING PLATE WITH INTEGRATED DAMPING MAT

The damping plate, made from a fibre-glass and steel reinforced polyester, is engineered in every detail. The polypropylene damping mat is integrated into the amoeba-shaped damping plate, with a supporting cone in the middle.



LINE 21 POST HEAD

Designed to secure the ends of cable runs. via loops secured with hex nuts.



GLIDE ANCHOR POST

Stainless steel console, shaped and welded from a circular-sectioned steel rod. The standard height is 30 cm. Custom heights up to 140cm may be ordered.



DS 21 HEAD KIT

Designed to fit over the anchor post and accommodate the anchoring cable in such way that the DiaGlider-Fix will run through it. Cast from stainless steel.

ANCHORING WIRE

The heavy-duty 304 stainless steel safety cable connects the posts and creates a flexible line-anchoring system.



DIAGLIDER-FIX

Manufactured from high-strength alloy, the DiaGlider-Fix offers unhindered movement along the system.



SWAGED TURN BUCKLE

This swageable turn buckle can also be post-installed and is intended to ensure correct tension, while allowing the DiaGlider-Fix to slide over it.



DOCUMENTATION

System inspection, approval and registration.





Need help with project planning?
Contact: info@sempergreen-usa.com

PLANNING

PLANNING PRINCIPLES

The installation plan for the fall protection system must be prepared by the manufacturer, or by a DiaSafe®-certified professional, accounting for local conditions and project requirements.

- the number of permitted users (simultaneous)
- the permitted length of lanyard of the PPE
- the exact placement of the system posts and components
- the required ballast

KEY INFORMATION NEEDED IN ORDER TO PROVIDE PLANS

1. Roof plan with all the height measurements of the different rooftop surfaces, including all levels (i.e. rooftops, terraces, ground floor, parapet wall, additional structures).
2. Elevations and section drawings indicating the height levels
3. Inclination of the roof
4. Additional roof components not shown on plans
5. Layer build-up of the roofs,
6. Material of the ballast (e.g. substrate, gravel, paving)
7. A dwg-formatted file of the drawings (which will speed up the planning process), or a pdf file, if a dwg is unavailable.

*Sample
DiaSafe®
Installation
Plan*

