


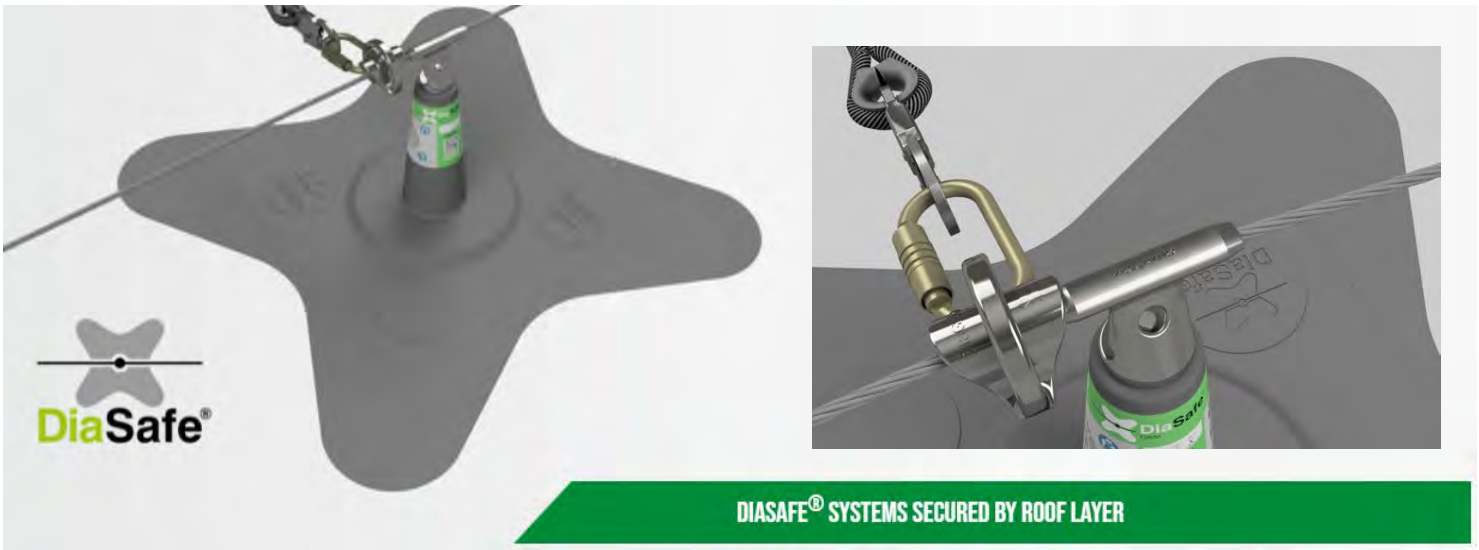

General

The DiaSafe Glide horizontal lifeline system:

- Provides hands-free, continuous access along roof perimeter for single or multiple users.
- Is permanently secured by ballast layers without penetration of water-proofing membrane.
- Corrosion proof construction.
- Cost-effective solution of safe access.
- For use on roof slopes up to 5 degrees.

Technical Data

- ANSI Z359.18-2017 type D compliant fall arrest and fall restraint system.
- Maximum roof slope is 5 degrees.
- Minimum ballast weight for standard mat (108" x 108") is 16.7 lbs./sf (1,588 lbs. per anchor)
- Highest tensile strength on the waterproofing membrane: 3.18 lbs./sf (0,00155 N/mm²)
- 5-year manufacturer warranty, annual inspections required.

Material Properties


- Damping Mat- FGT-305 geo-textile (10 oz/sf)
- Anchor cone: UV-resistant polyester resin
- Anchor Post and Hardware: 304 stainless steel
- Cable: 5/16", 7x19, Type 304 stainless steel

LEED Info

Recycled Content (% by weight)	0%	Credit 4
Manufacture Location	Hungary	Credit 5
Extraction Location	Hungary	Credit 5
VOC Content (g/L)	0	

Logistical Info

- The standard damping mat is 108" x 108" (1 square meter).
- Approximately 24 damping mat & cone assemblies per pallet.

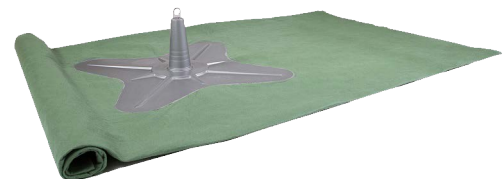

Material Testing

Product	DiaSafe
Description	Layer fixed anchorage connector
Test Data	


Testing carried out in accordance with ANSI Z359.18-2017 type D following clauses only:

3.1.1 & 3.1.2 Connection Points	PASS
3.1.3 Metallic Materials	Not fully assessed
3.1.4 Textiles and Other Synthetic Materials	Not fully assessed
3.1.5 Other requirements	PASS
3.2.1 Static Strength Requirements	PASS
3.2.2 Dynamic Strength Requirements	PASS
3.2.3 Residual Strength Requirements	PASS
3.2.4 Serviceability Load Requirements	PASS

The product referenced "DiaSafe" complies with the clauses of ANSI Z359.18-2017 type D stated above

Full details of test data provided in the following report:
SPC0284286 /1917/1 Issue 2 dated the 11th May 2021

Typical Detail

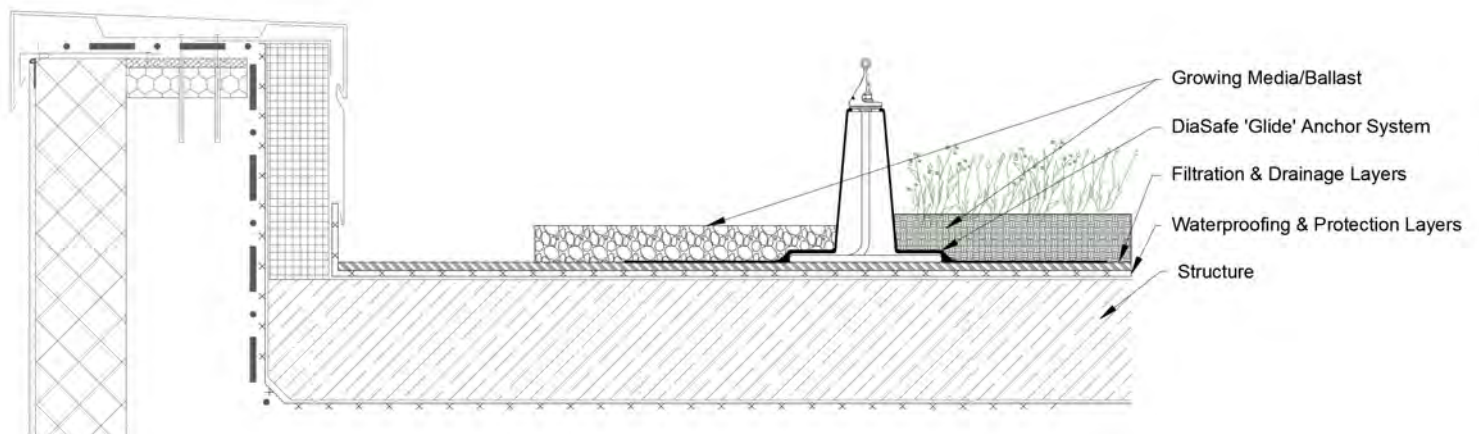

Additional Info

- Minimum distance between anchor posts is 5 feet.
- Maximum distance between anchor posts is 26 feet.
- Typical distance of cable line to parapet is 8 feet.
- Annual certification is required.
- Resistant to salt and acid: yes
- Hands-free usage: yes
- Effective in winter conditions (frost, snow): yes
- Always refer to project-specific plans for layout.

