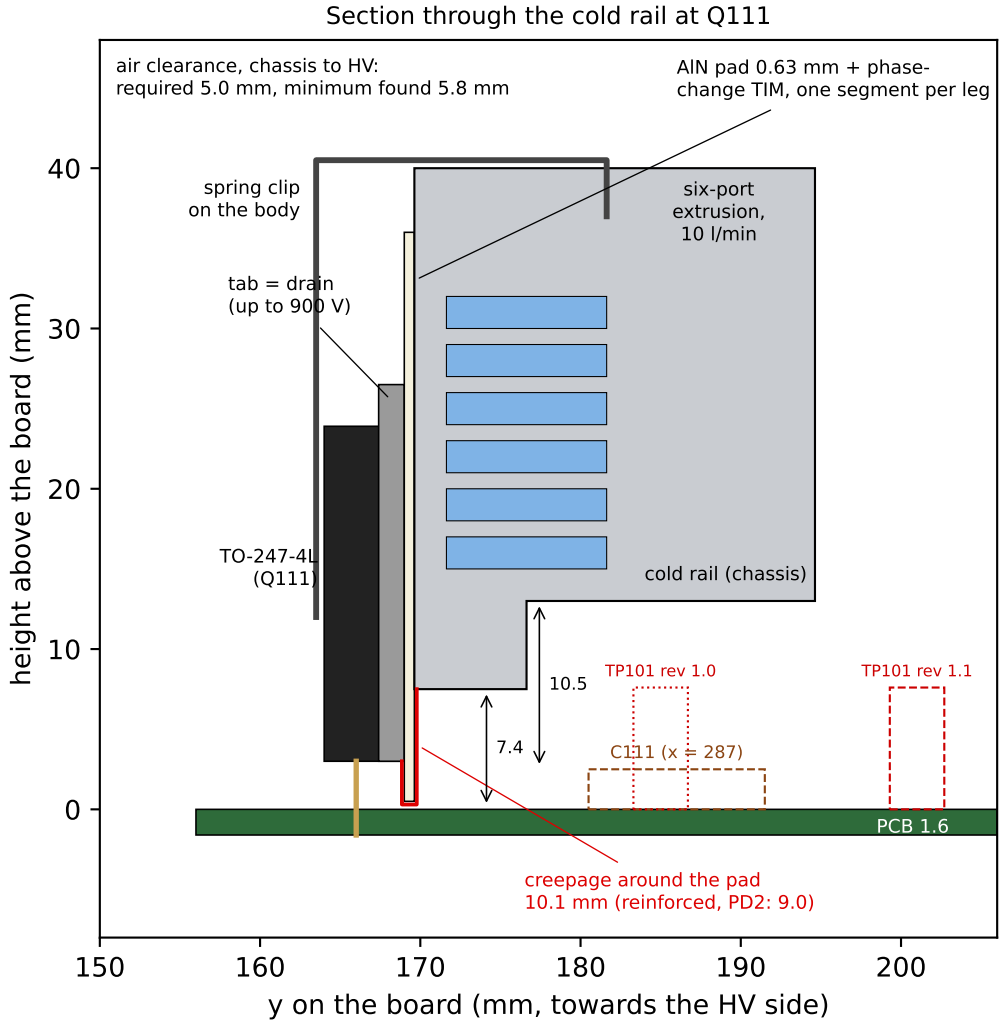
Section through the cold rail at Q111
air clearance, chassis to HV:
required 5.0 mm, minimum found 5.8 mm
AlN pad 0.63 mm + phase-
change TIM, one segment per leg
spring clip
on the body
six-port
extrusion,
10 l/min
tab = drain
(up to 900 V)
TO-247-4L
(Q111)
cold rail (chassis)
10.5
7.4
TP101 rev 1.0
TP101 rev 1.1
C111 (x = 287)
PCB 1.6
creepage around the pad
10.1 mm (reinforced, PD2: 9.0)
height above the board (mm)
y on the board (mm, towards the HV side)
0
10
20
30
40
150
160
170
180
190
200