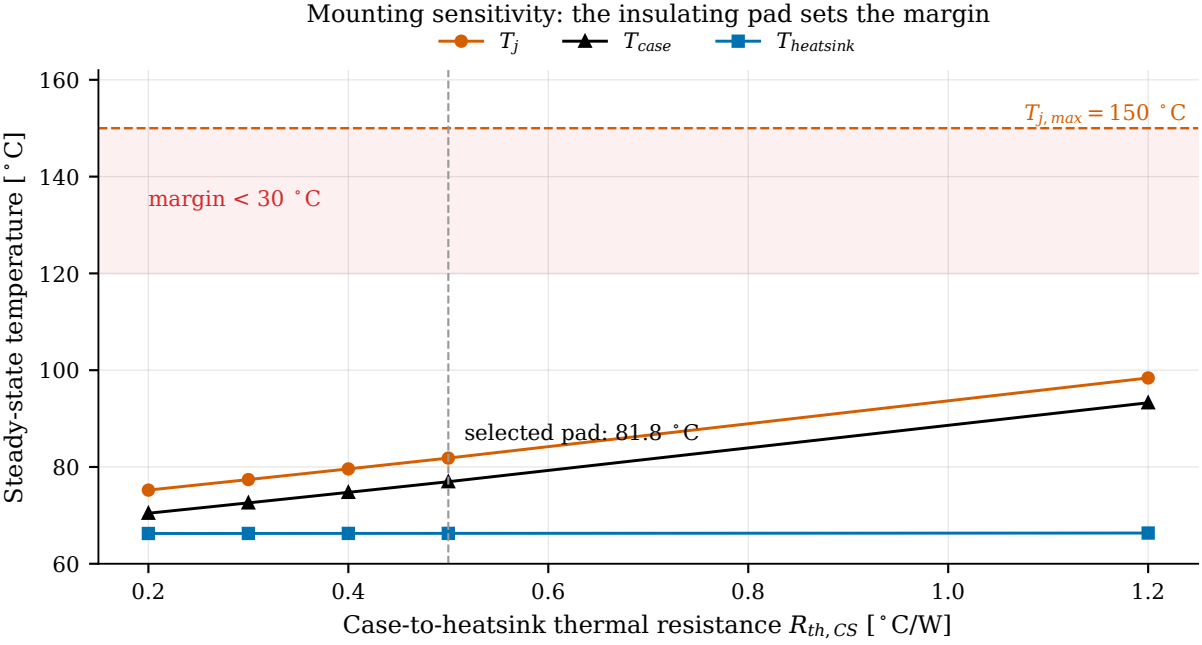
Mounting sensitivity: the insulating pad sets the margin
T_j
T_{case}
$T_{heatsink}$
$T_{j,max} = 150$ ˚C
margin < 30 ˚C
selected pad: 81.8 ˚C
Steady-state temperature [˚C]
Case-to-heatsink thermal resistance $R_{th,CS}$ [˚C/W]
160
140
120
100
80
60
0.2
0.4
0.6
0.8
1.0
1.2