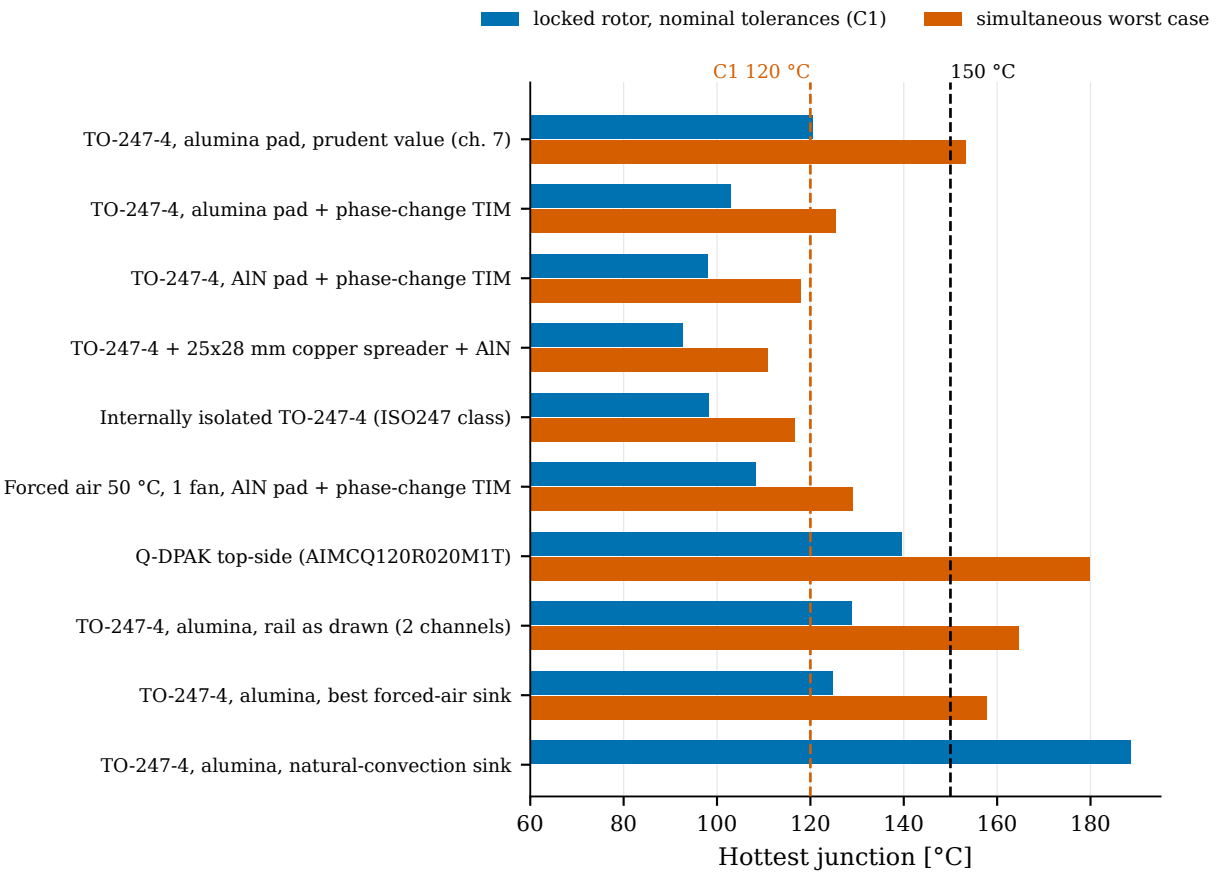
locked rotor, nominal tolerances (C1)
simultaneous worst case
C1 120 °C
150 °C
TO-247-4, alumina pad, prudent value (ch. 7)
TO-247-4, alumina pad + phase-change TIM
TO-247-4, AlN pad + phase-change TIM
TO-247-4 + 25x28 mm copper spreader + AlN
Internally isolated TO-247-4 (ISO247 class)
Forced air 50 °C, 1 fan, AlN pad + phase-change TIM
Q-DPAK top-side (AIMCQ120R020M1T)
TO-247-4, alumina, rail as drawn (2 channels)
TO-247-4, alumina, best forced-air sink
TO-247-4, alumina, natural-convection sink
60
80
100
120
140
160
180
Hottest junction [°C]