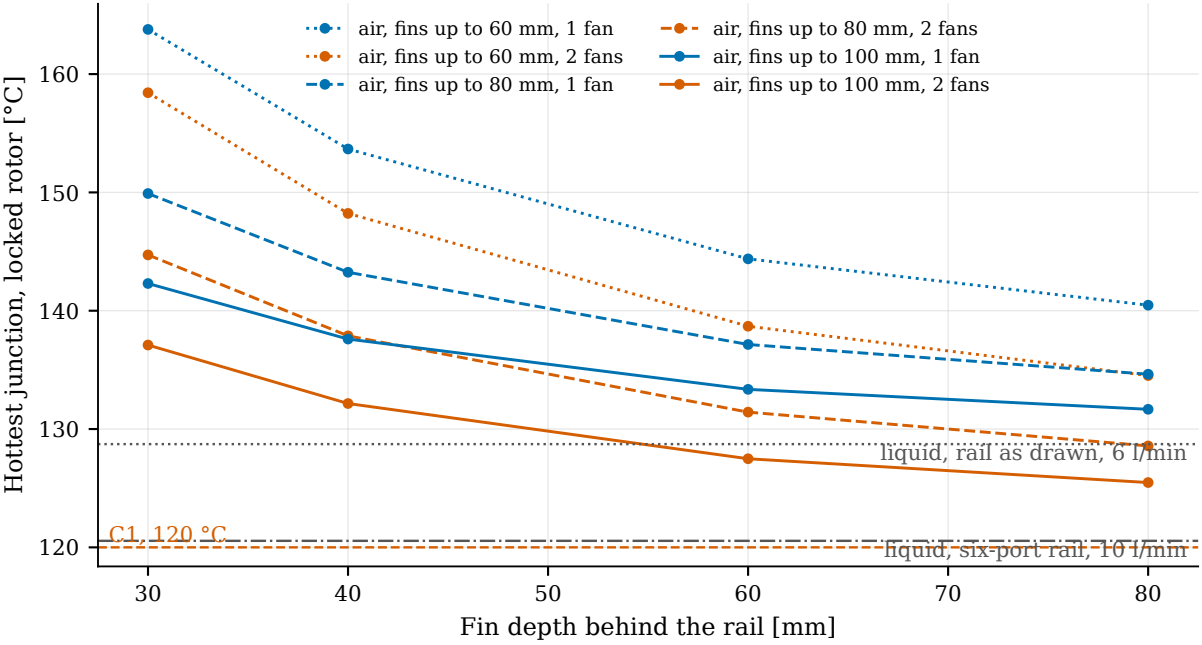
air, fins up to 60 mm, 1 fan
air, fins up to 60 mm, 2 fans
air, fins up to 80 mm, 1 fan
air, fins up to 80 mm, 2 fans
air, fins up to 100 mm, 1 fan
air, fins up to 100 mm, 2 fans
Hottest junction, locked rotor [°C]
160
150
140
130
120
liquid, rail as drawn, 6 l/min
C1, 120 °C
liquid, six-port rail, 10 l/min
30
40
50
60
70
80
Fin depth behind the rail [mm]