


Wireless & Mobile Networks

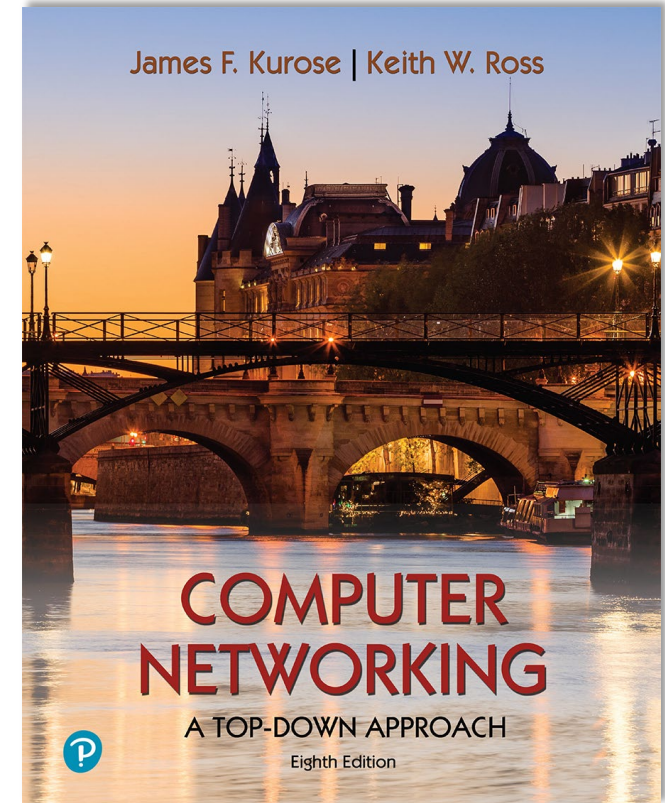

Computer Networking: A Top-Down Approach

8th edition

Jim Kurose, Keith Ross
Pearson, 2020

Acknowledgements

These Slides have been adapted from the originals made available by J. Kurose and K. Ross
All material copyright 1996-2020
J.F Kurose and K.W. Ross, All Rights Reserved

Context

- More wireless (mobile) phone subscribers than wired (fixed) phone subscribers
 - 10-to-1 in 2019!
- More **mobile**-broadband-connected devices than **fixed**-broadband-connected devices
 - 5-1 in 2019
 - 4G/5G cellular networks now embracing Internet protocol stack, including SDN
- Two different challenges
 - **wireless**: communication over wireless link
 - **mobility**: handling the mobile user who changes point of attachment to network

Outline

■ Introduction

Wireless


- Wireless Links and network characteristics
- Wireless LANs: WiFi
- Wireless PANs: Bluetooth
- Cellular networks: 4G and 5G

Mobility


- Mobility management: principles
- Mobility: impact on higher-layer protocols



Elements of a Wireless Network

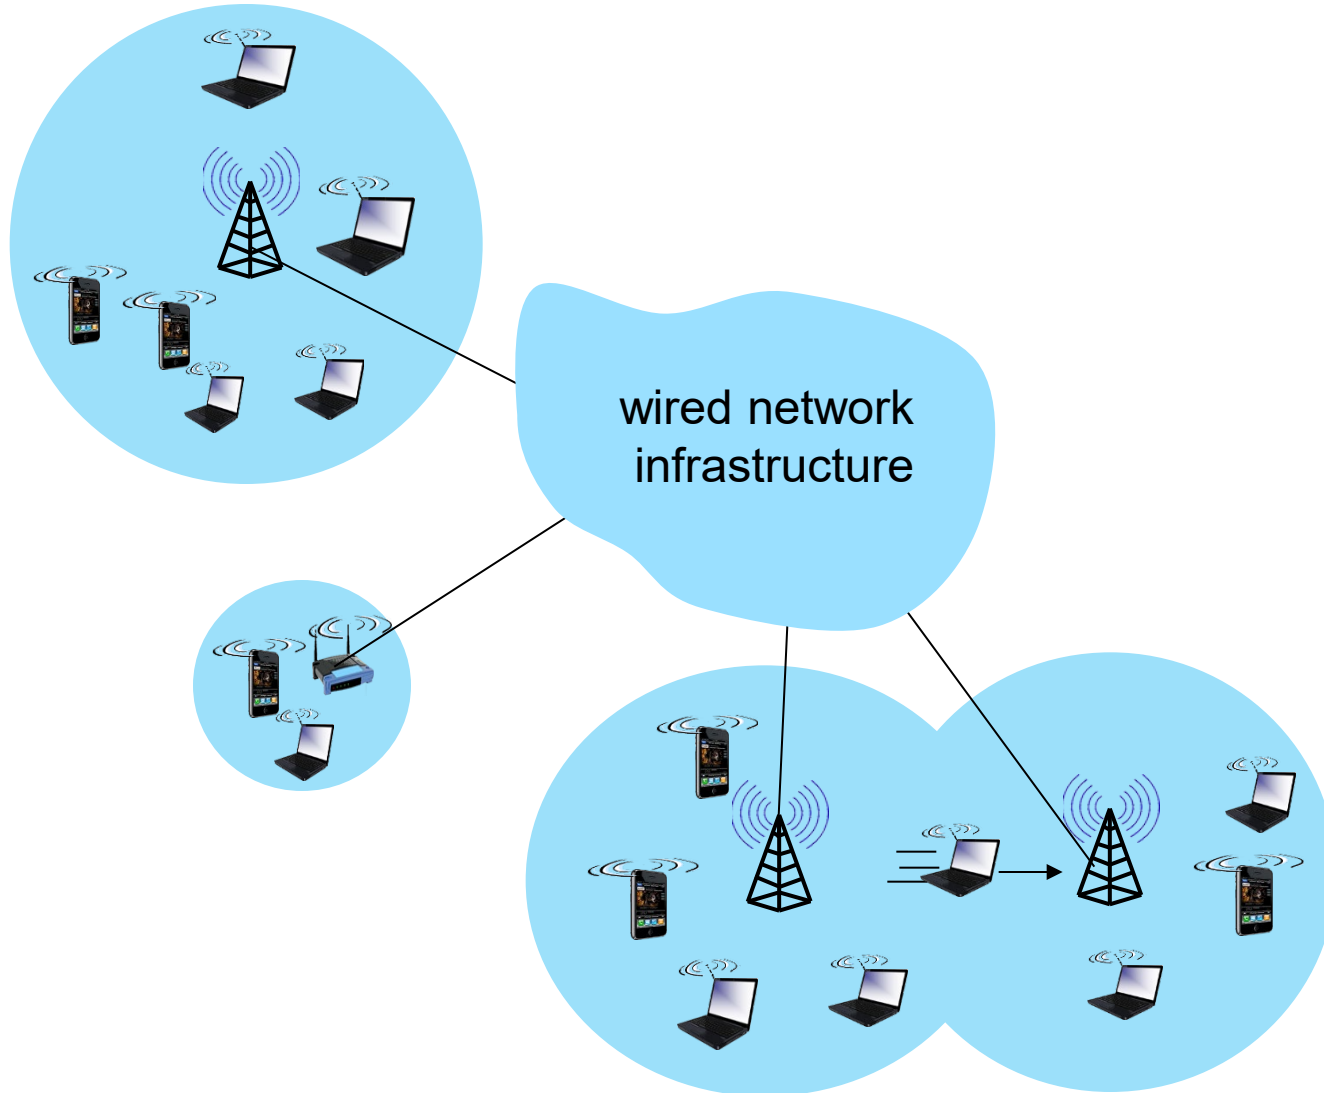

Elements of a wireless network

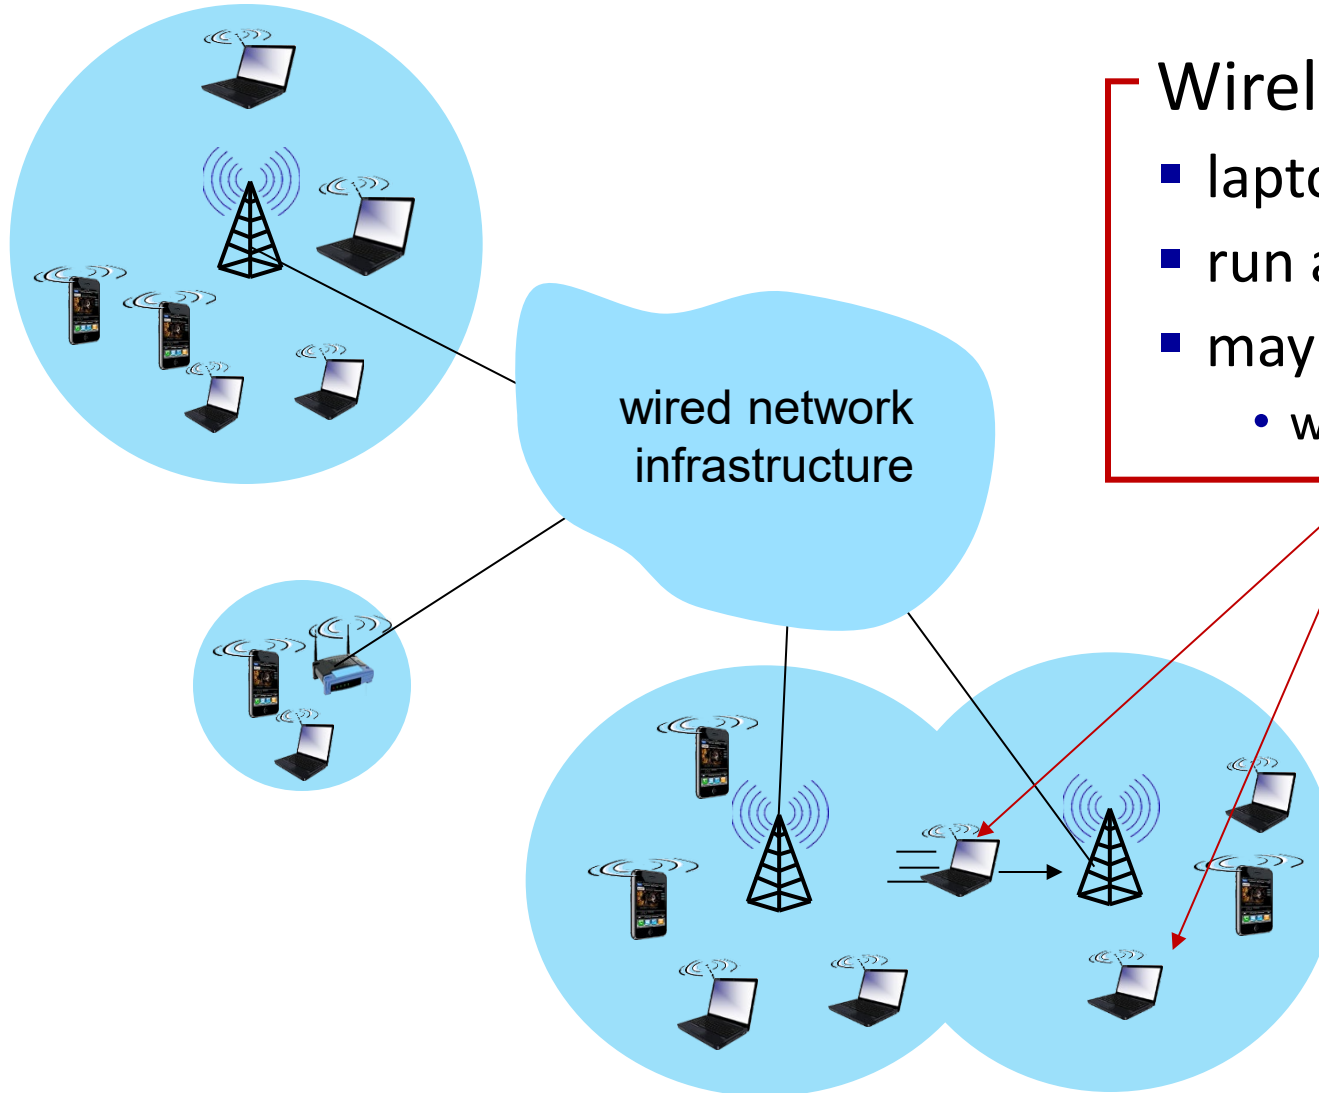


Wireless Hosts

- laptop, smartphone, IoT
- run applications
- may be stationary (non-mobile) or mobile
 - wireless does *not* always mean mobility!



Elements of a wireless network

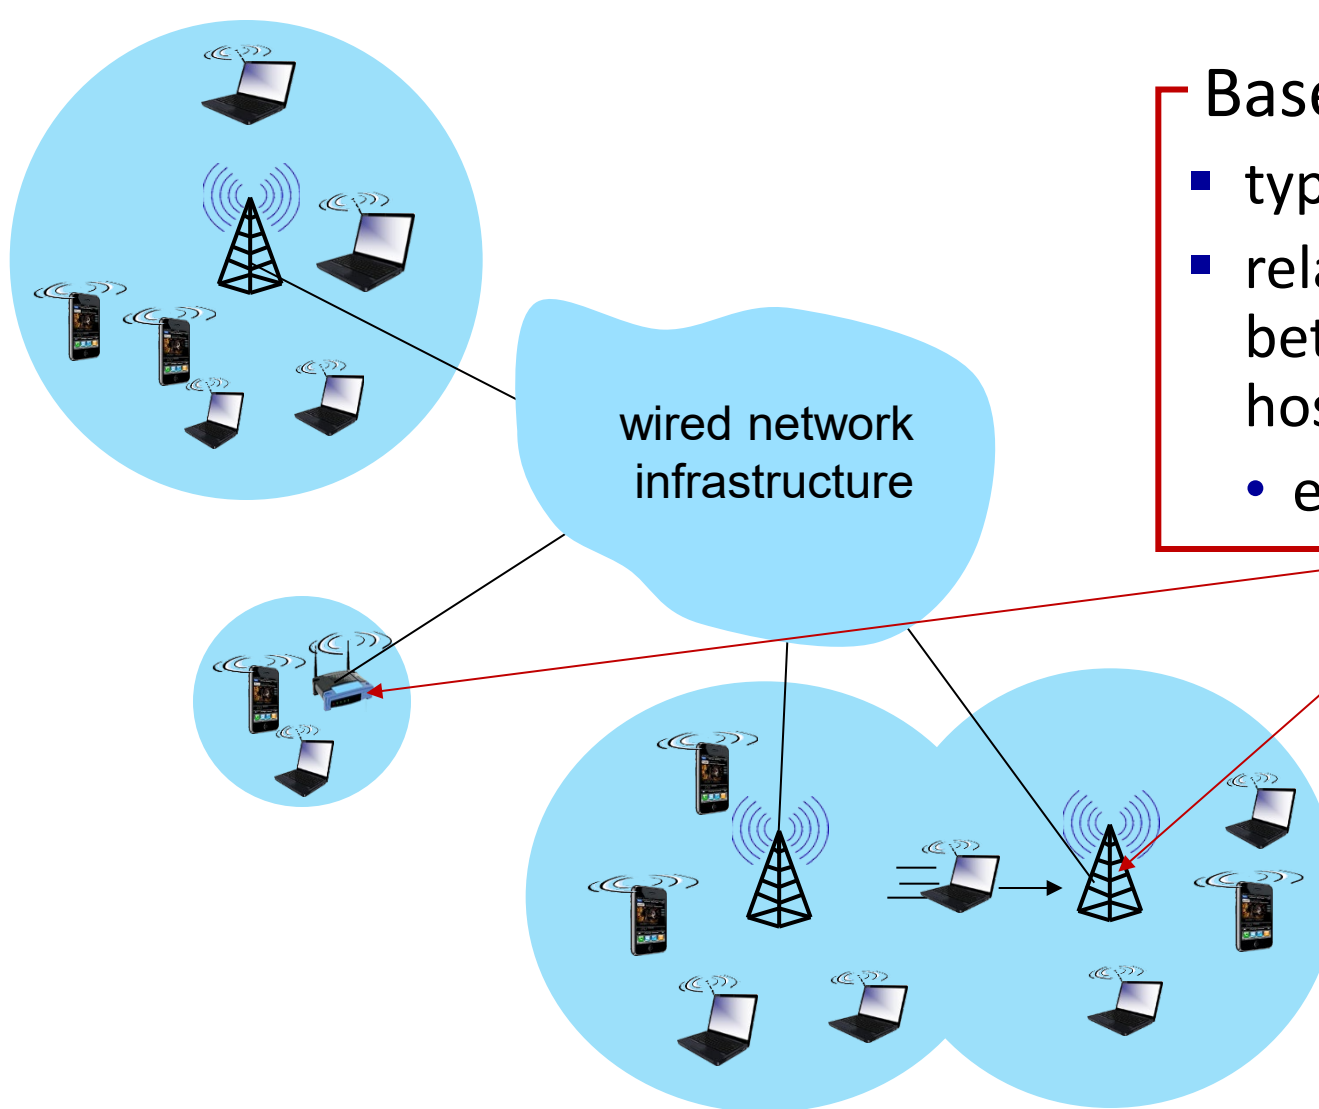


Base Station



- typically connected to wired network
- relay - responsible for sending packets between wired network and wireless host(s) in its "area"
 - e.g., cell towers, 802.11 access points

Elements of a wireless network

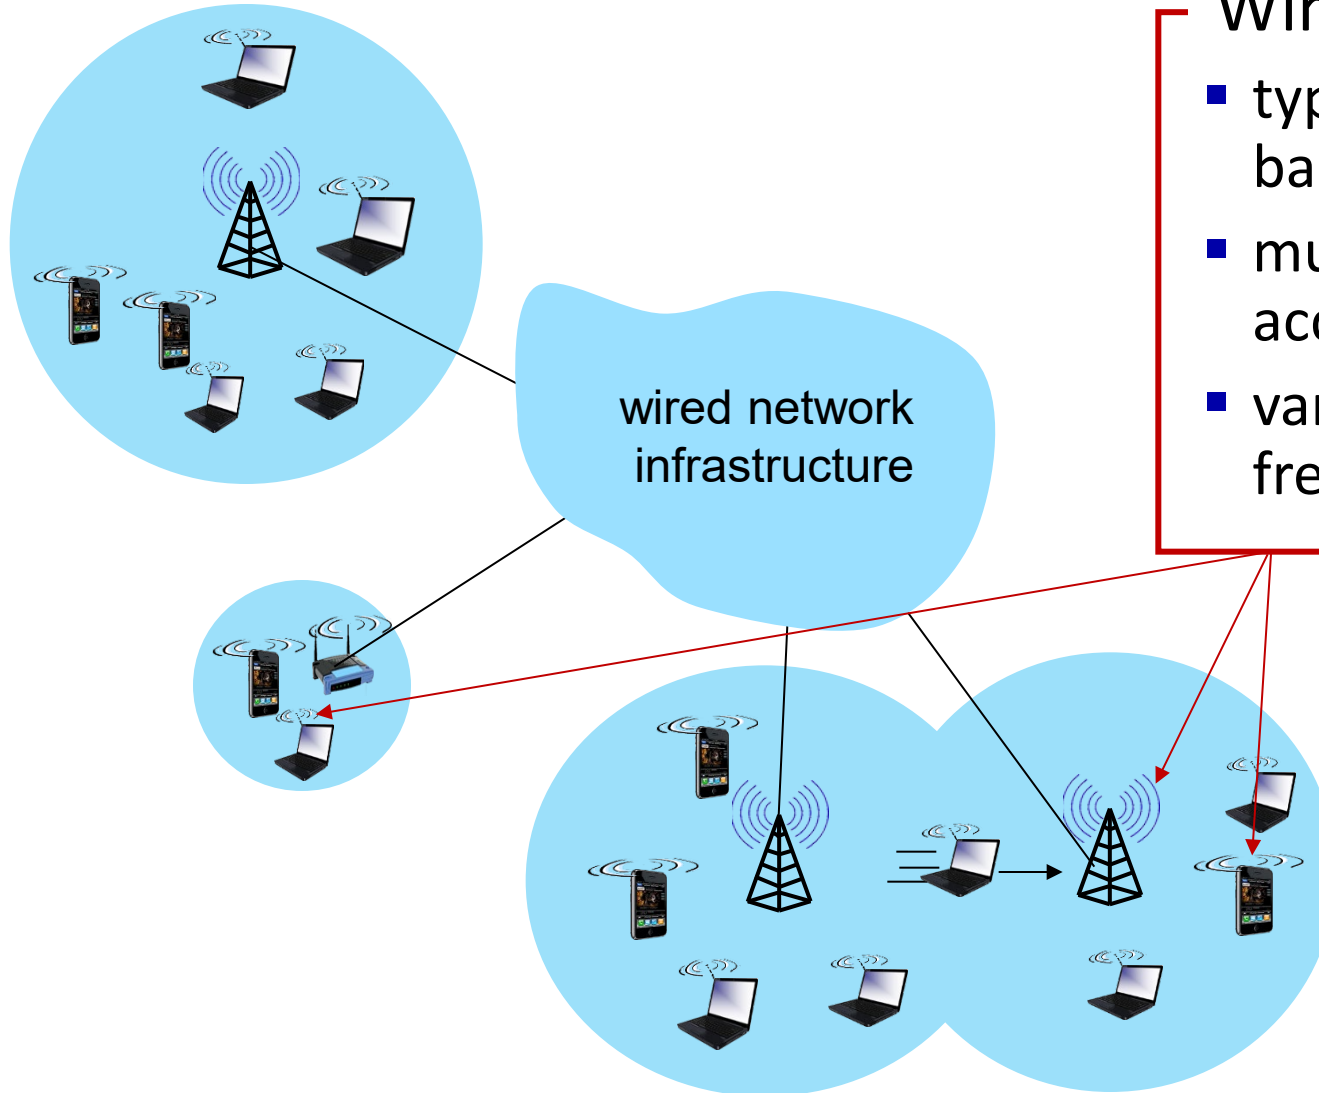


Wireless Link




- typically used to connect mobile(s) to base station, also used as backbone link
- multiple access protocol coordinates link access
- various transmission rates and distances, frequency bands

Characteristics of selected wireless links

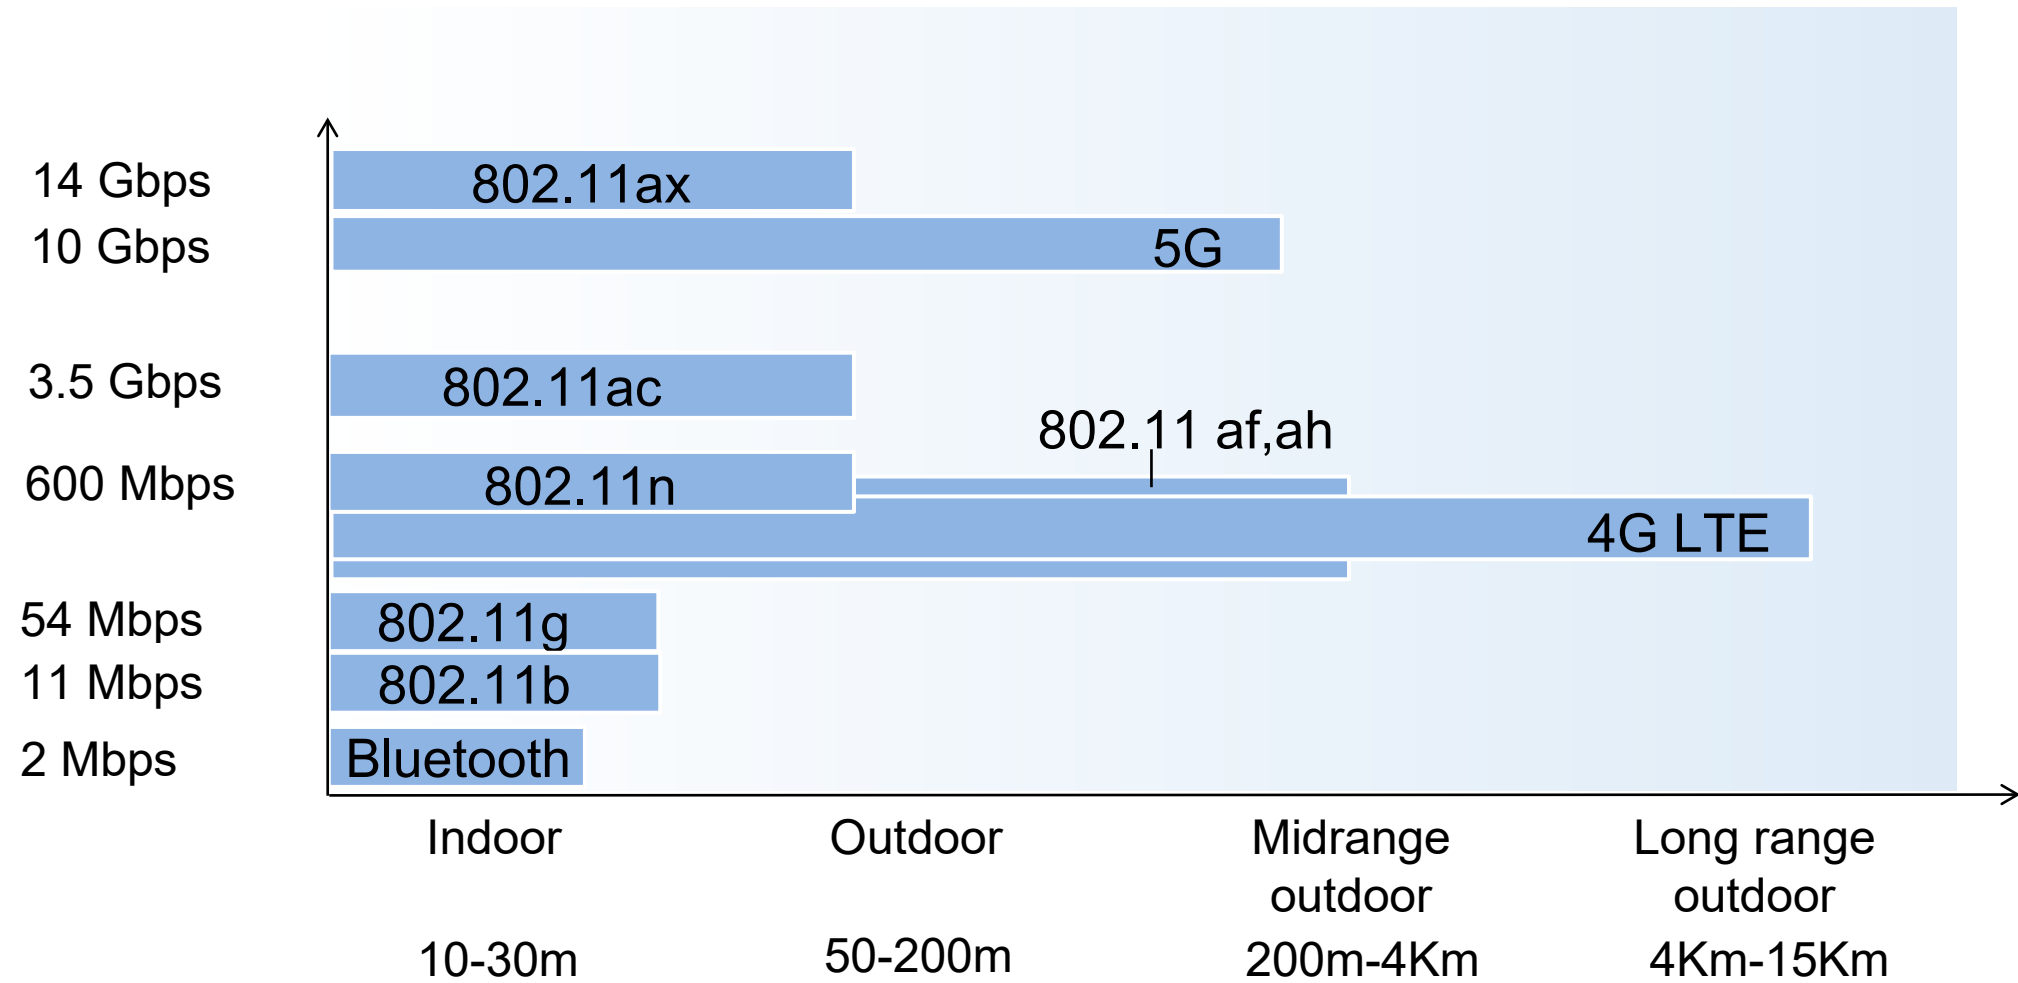


Classification of Wireless Networks

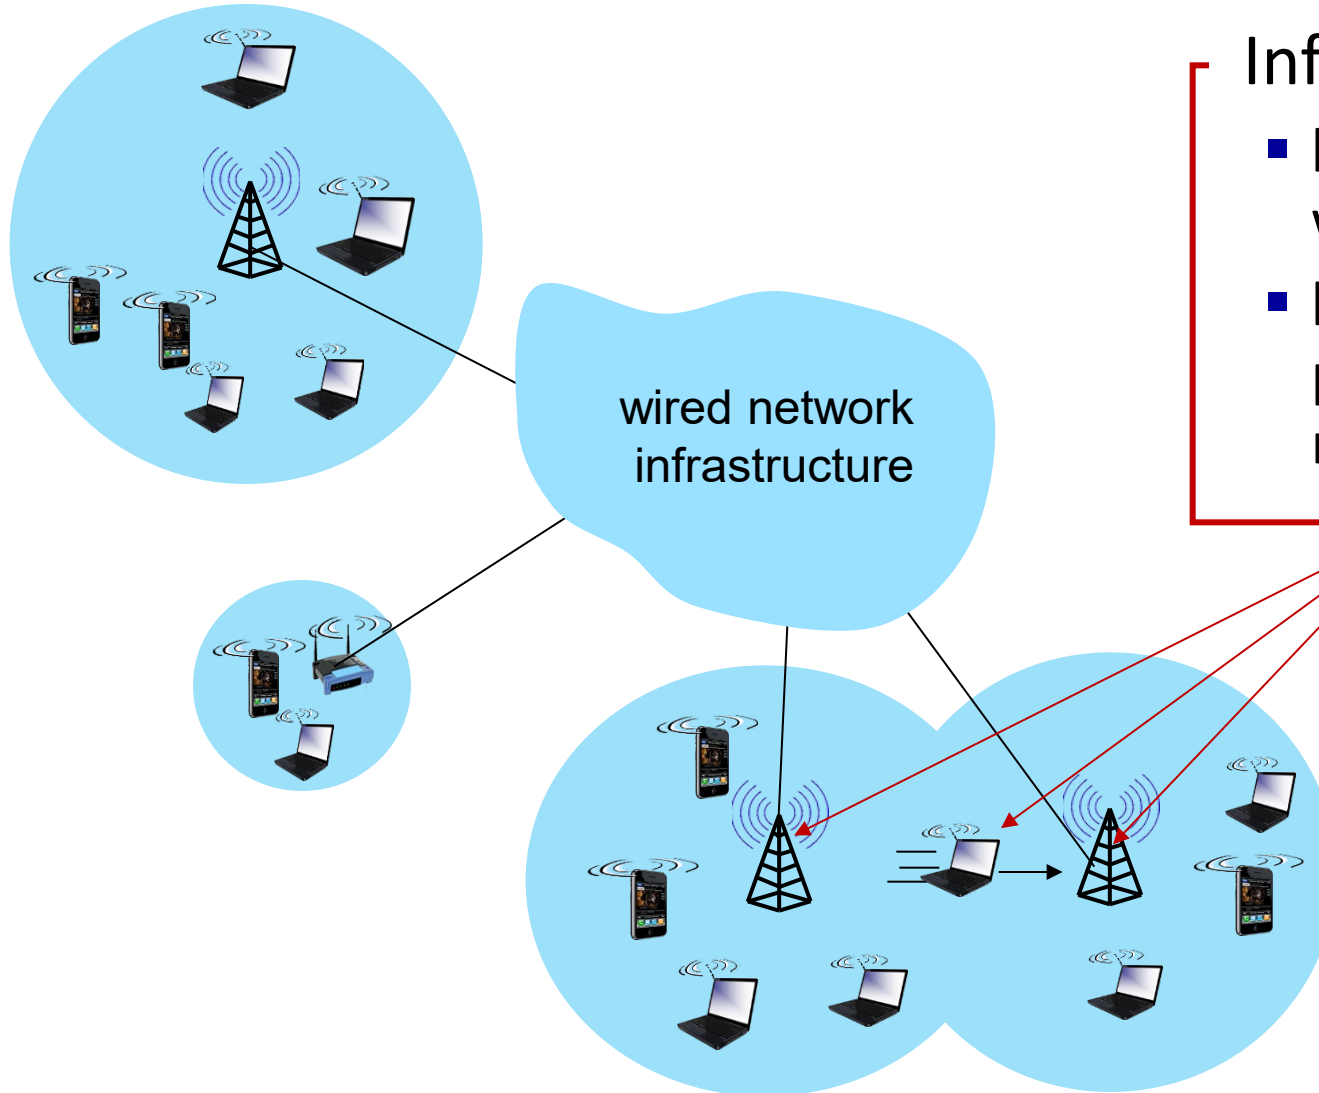

Infrastructure Mode

- base station connects mobiles into wired network
- handoff: mobile changes base station providing connection into wired network

Classification of Wireless Networks

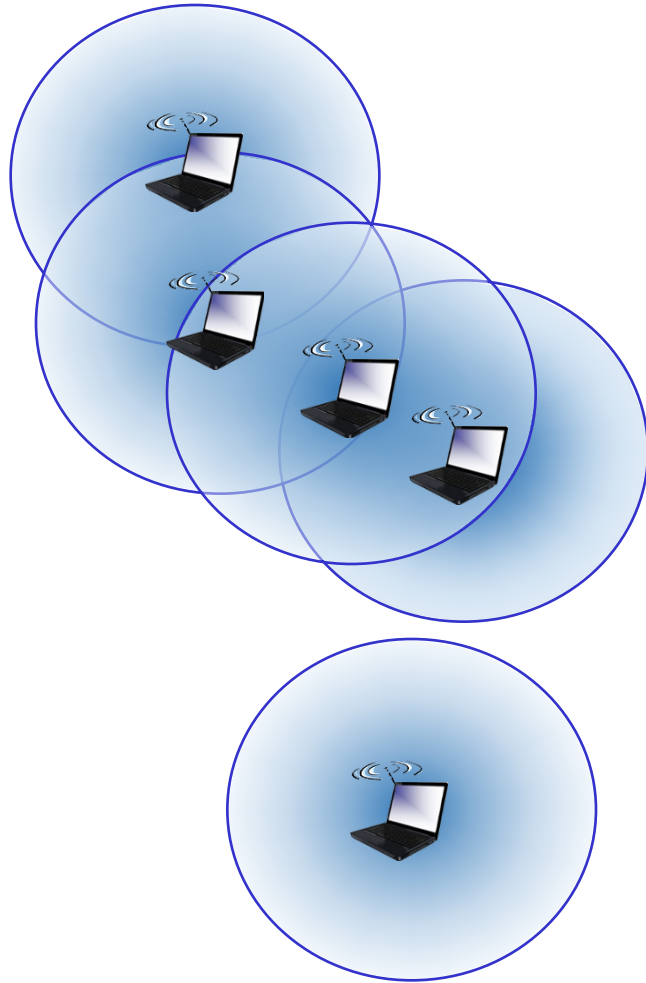

Ad hoc Mode

- no base stations
- nodes can only transmit to other nodes within link coverage
- nodes organize themselves into a network: route among themselves

Wireless Network Taxonomy

	Single hop	Multiple hops
<i>Infrastructure-based</i>	Host connects to base station which connects to larger Internet: <i>WiFi, cellular networks</i>	Host may have to relay through several wireless nodes to connect to larger Internet: <i>sensor networks</i>
<i>Ad hoc</i>	No base station, no connection to larger Internet: <i>Bluetooth</i>	No base station, no connection to larger Internet. May have to relay to reach other a given wireless node: <i>MANET, VANET</i>

Outline

- Introduction

Wireless

- Wireless Links and network characteristics
- Wireless LANs: WiFi
- Wireless PANs: Bluetooth
- Cellular networks: 4G and 5G



Mobility

- Mobility management: principles
- Mobility management: practice
- Mobility: impact on higher-layer protocols

Wireless link characteristics (1)

Important differences from wired link


- **decreased signal strength:** radio signal attenuates as it propagates through matter (path loss)
- **interference from other sources:** wireless network frequencies (e.g., 2.4 GHz) shared by many devices (e.g., WiFi, cellular, motors): interference
- **multipath propagation:** radio signal reflects off objects ground, arriving at destination at slightly different times

.... make communication across (even a point to point) wireless link much more “difficult”




Wireless link characteristics (2)

- SNR: signal-to-noise ratio
 - larger SNR – easier to extract signal from noise (a “good thing”)
- SNR versus BER tradeoffs
 - *given physical layer*: increase power -> increase SNR->decrease BER
 - *given SNR*: choose physical layer that meets BER requirement, giving highest throughput
 - SNR may change with mobility: dynamically adapt physical layer (modulation technique, rate)

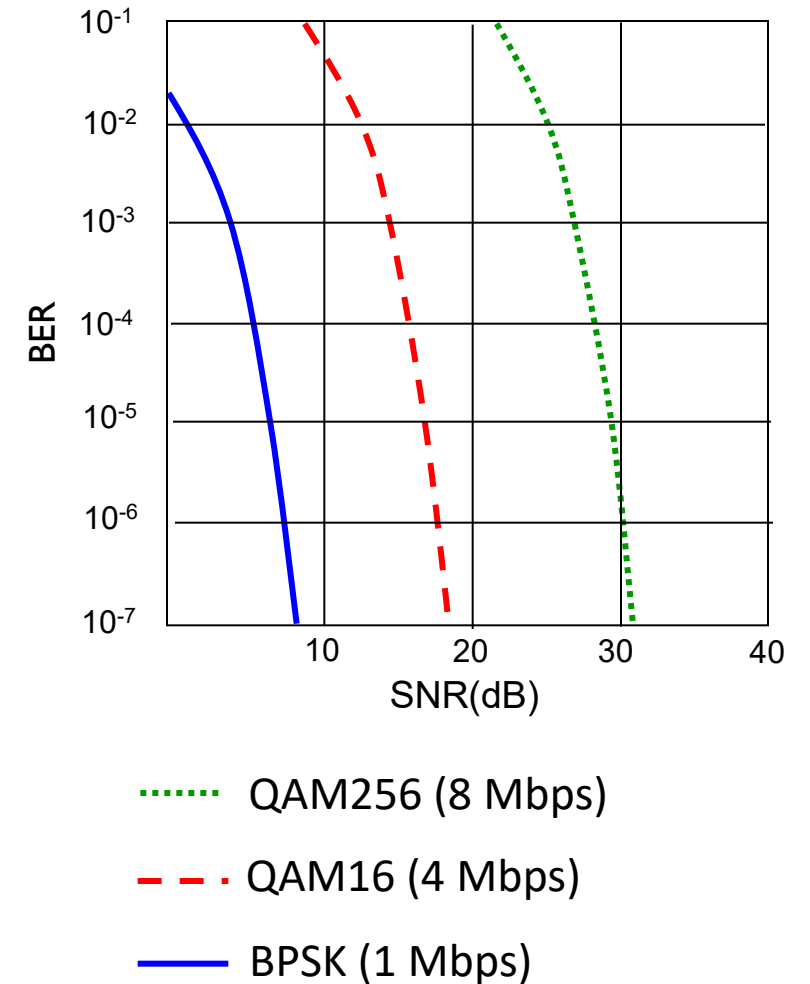


Wireless link characteristics (3)

Multiple wireless senders/receivers create additional problems (beyond multiple access):

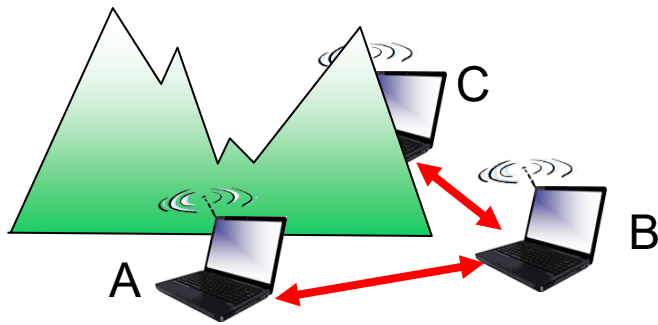

Hidden Node problem

- B, A hear each other
- B, C hear each other
- A, C can not hear each other, thus colliding at B
 - A and C unaware of their collision

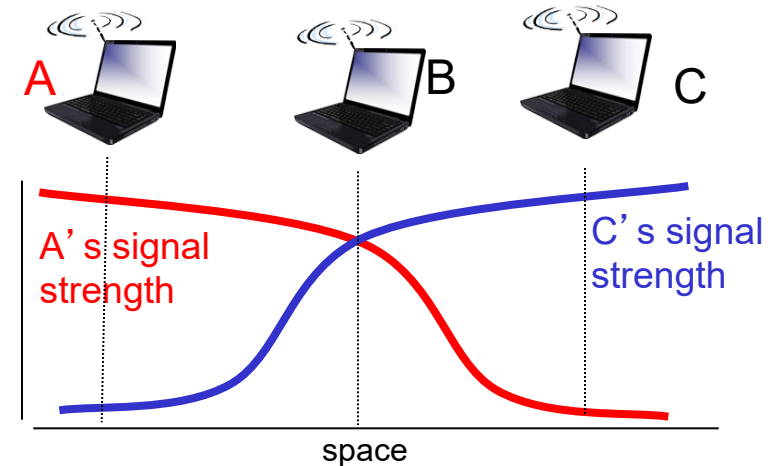

Signal attenuation:

- B, A hear each other
- B, C hear each other
- A, C can not hear each other colliding at B

Outline

- Introduction

Wireless

- Wireless Links and network characteristics
- Wireless LANs: WiFi
- Wireless PANs: Bluetooth
- Cellular networks: 4G and 5G



Mobility


- Mobility management: principles
- Mobility management: practice
- Mobility: impact on higher-layer protocols

IEEE 802.11 Wireless LAN

IEEE standard	Year	Max data rate	Range	Frequency
802.11b	1999	11 Mbps	30 m	2.4 Ghz
802.11g	2003	54 Mbps	30m	2.4 Ghz
802.11n (WiFi 4)	2009	600 Mbps	70m	2.4, 5 Ghz
802.11ac (WiFi 5)	2013	3.47Gpbs	70m	5 Ghz
802.11ax (WiFi 6)	2020	14 Gbps	70m	2.4, 5, 6 Ghz
802.11be (WiFi 7)	2024	46 Gbps	70m	2.4, 5, 6 Ghz
802.11af	2014	35 – 560 Mbps	1 Km	unused TV bands (54-790 MHz)
802.11ah	2017	347Mbps	1 Km	900 Mhz

- All use CSMA/CA for multiple access
- All have *infrastructure-based* and *ad hoc* modes

802.11 LAN Architecture

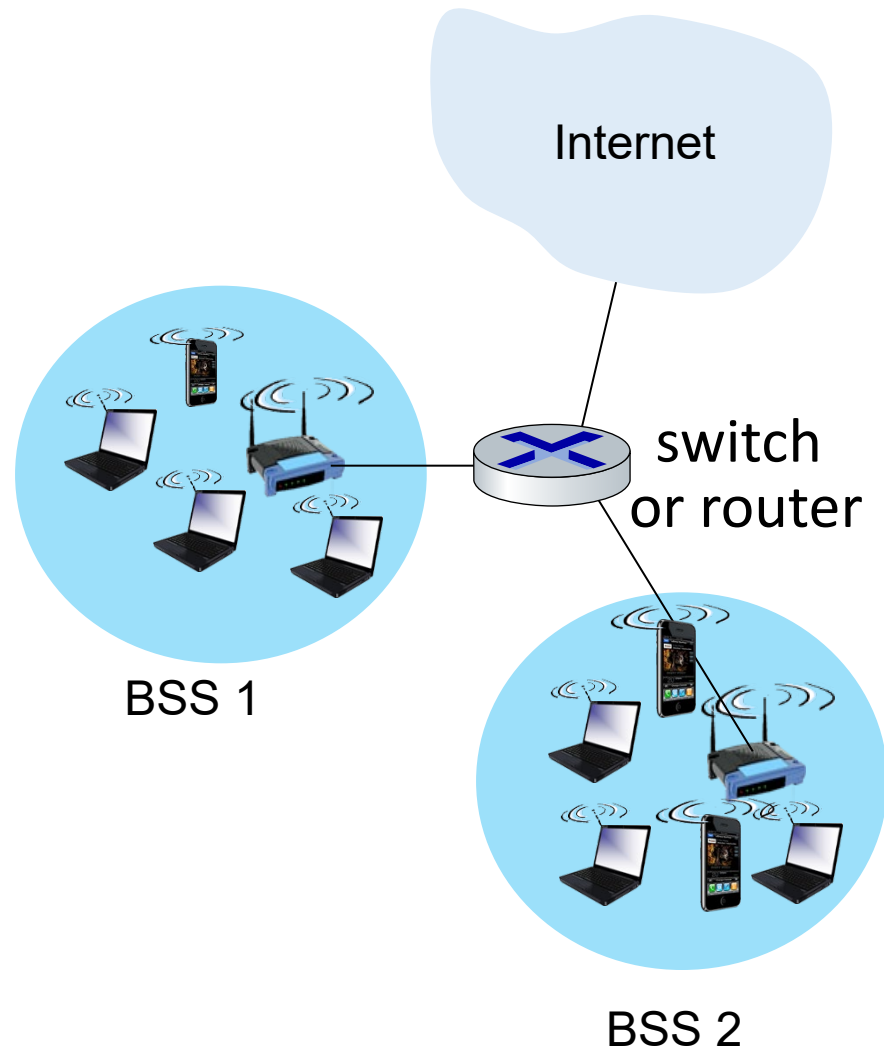


- Wireless host communicates with Access Point (AP)
- **Basic Service Set (BSS)** in *infrastructure* mode (aka “cell”)
 - Access Point
 - Wireless hosts
- **Basic Service Set (BSS)** in *ad hoc* mode
 - Wireless hosts only

802.11: AP Association

- Spectrum divided into channels at different frequencies
 - AP admin chooses frequency for AP
 - Interference possible
 - channel can be same as that chosen by neighboring AP!
- Arriving host must **associate** with an AP
 - scans channels, listening for *beacon frames*
 - AP's name (SSID), MAC address
 - selects AP to associate with
 - then may perform authentication
 - then typically run DHCP to get IP address in AP's subnet




802.11: Passive/Active scanning

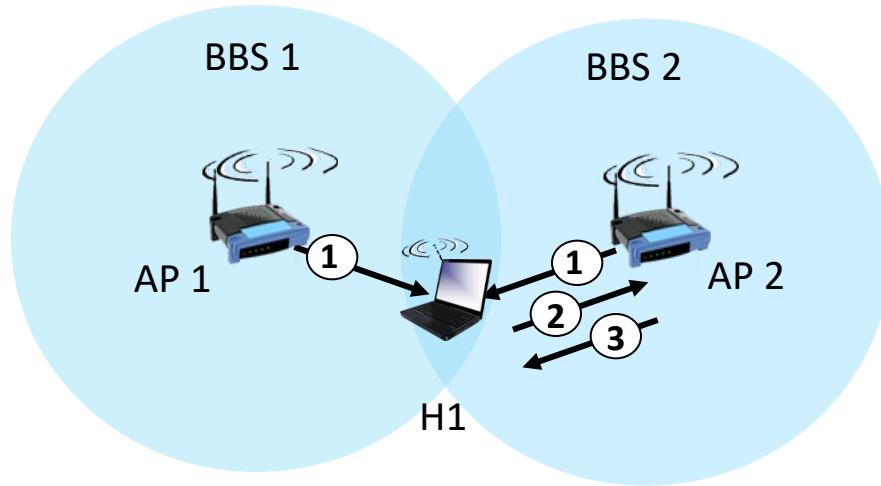

Passive scanning

- (1) beacon frames sent from APs
- (2) association Request frame sent from H1 to selected AP
- (3) association Response frame sent from selected AP to H1

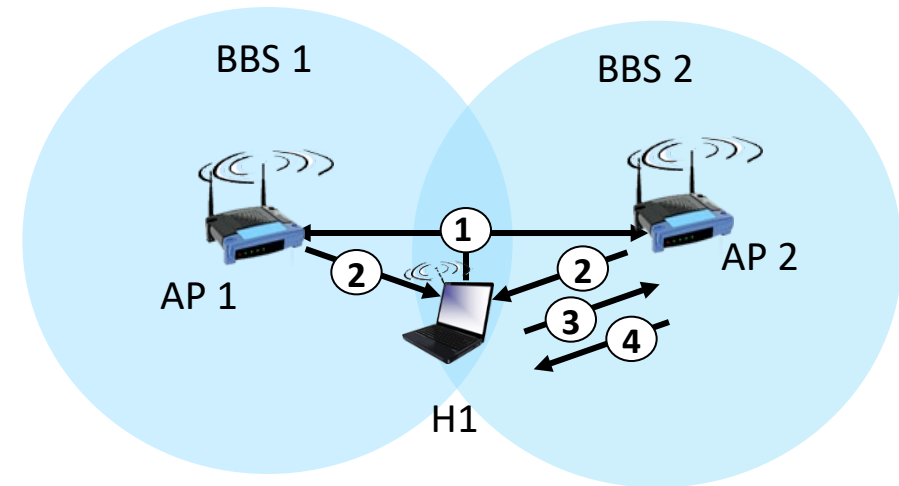


Active scanning

- (1) Probe Request frame broadcast from H1
- (2) Probe Response frames sent from APs
- (3) Association Request frame sent from H1 to selected AP
- (4) Association Response frame sent from selected AP to H1

IEEE 802.11: Multiple Access

- avoid collisions: 2⁺ nodes transmitting at same time
- 802.11: CSMA - sense before transmitting
 - don't collide with detected ongoing transmission by another node
- 802.11: *no* collision detection!
 - difficult to sense collisions: high transmitting signal, weak received signal due to fading
 - can't sense all collisions in any case: hidden terminal, fading
 - goal: *avoid collisions*: CSMA/CollisionAvoidance

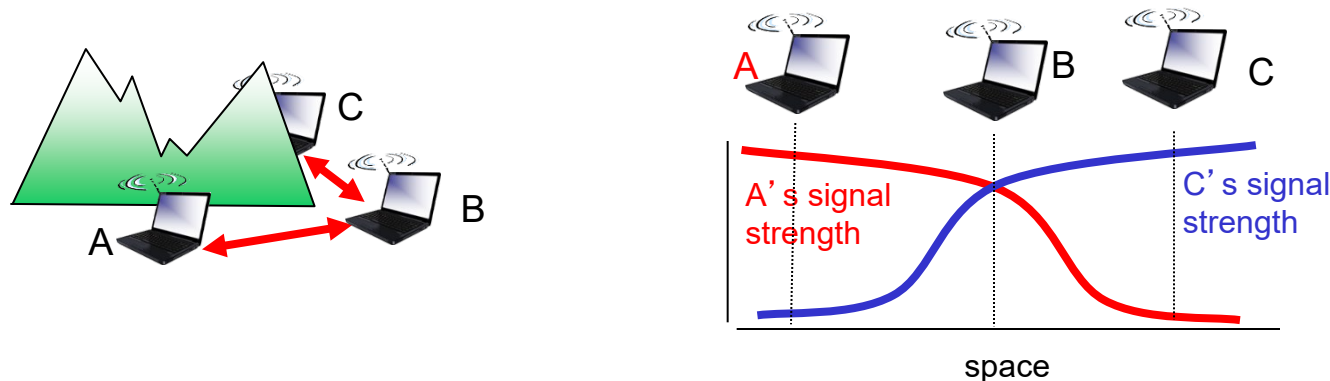


IEEE 802.11 MAC Protocol: CSMA/CA

802.11 sender


- 1 if sense channel idle for **DIFS** then
transmit entire frame (no CD)
- 2 if sense channel busy then
start random backoff time
timer counts down while channel idle
transmit when timer expires
if no ACK, increase random backoff interval, repeat 2

802.11 receiver


- if frame received OK
return ACK after **SIFS** (ACK needed due to hidden terminal problem)

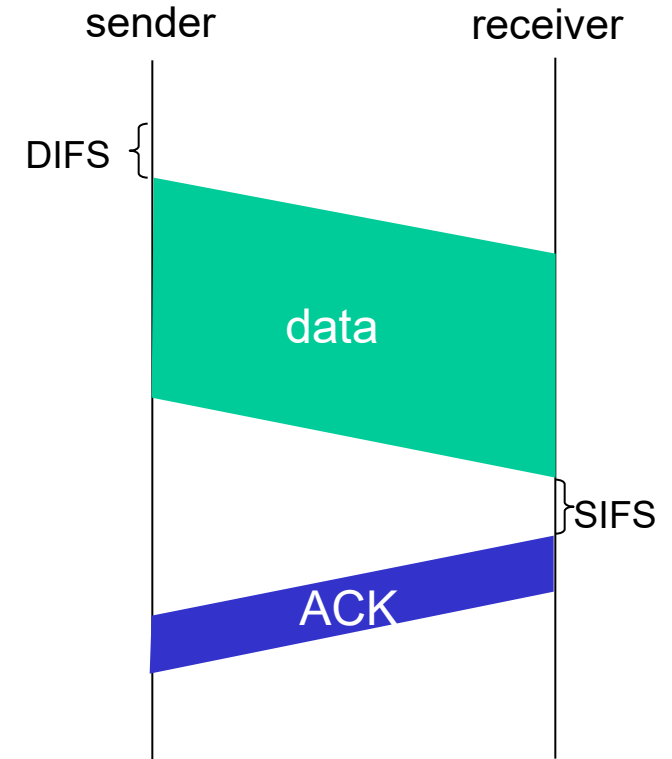

IEEE 802.11 MAC Protocol: CSMA/CA

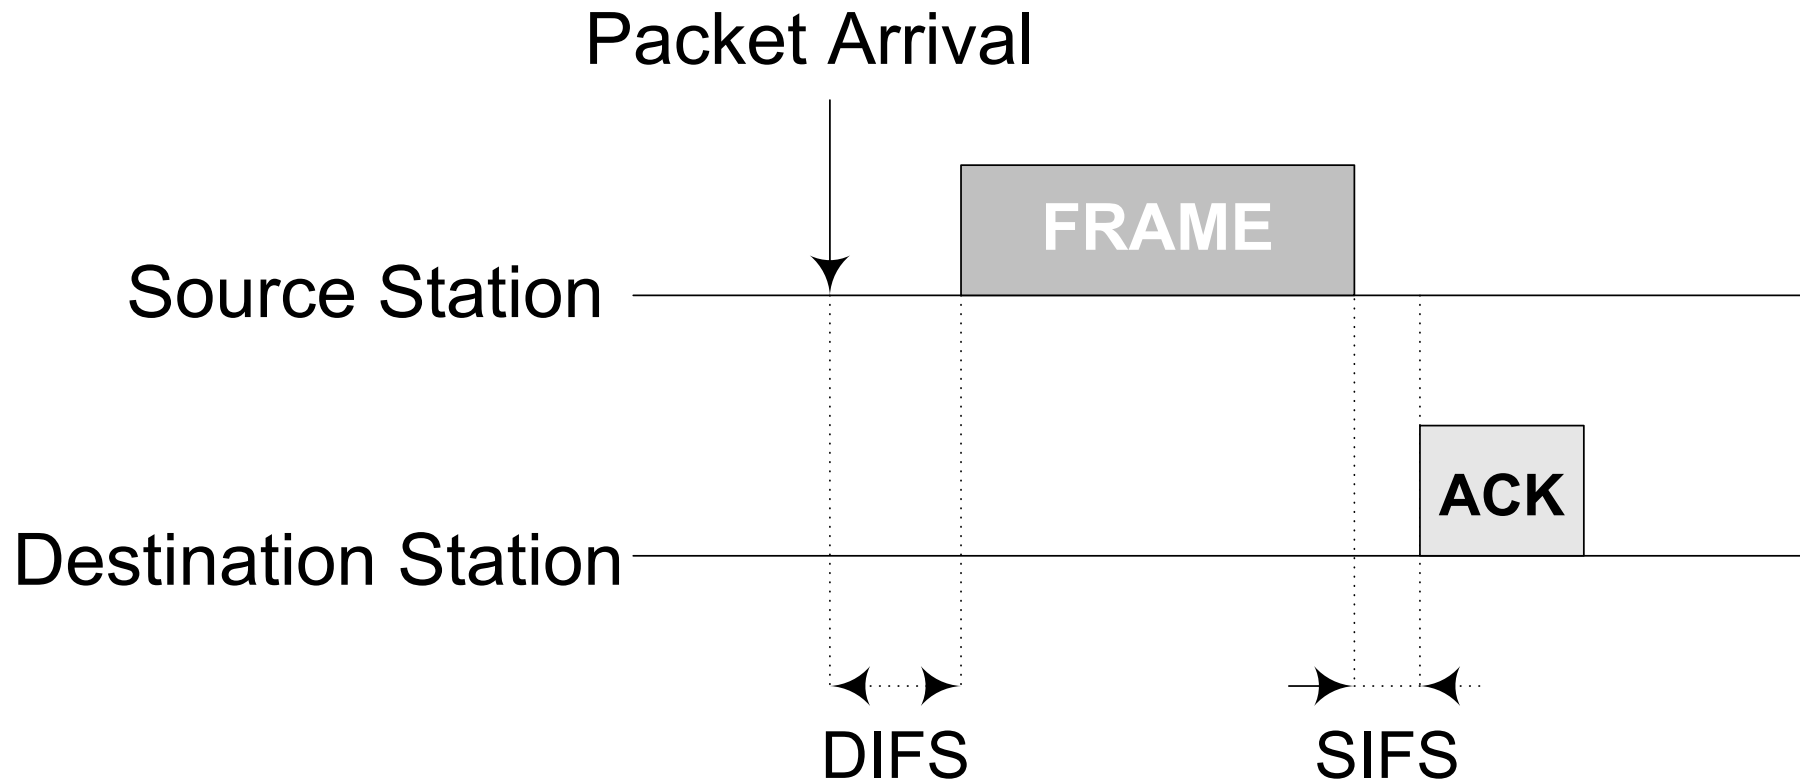

IEEE 802.11 MAC Protocol: CSMA/CA

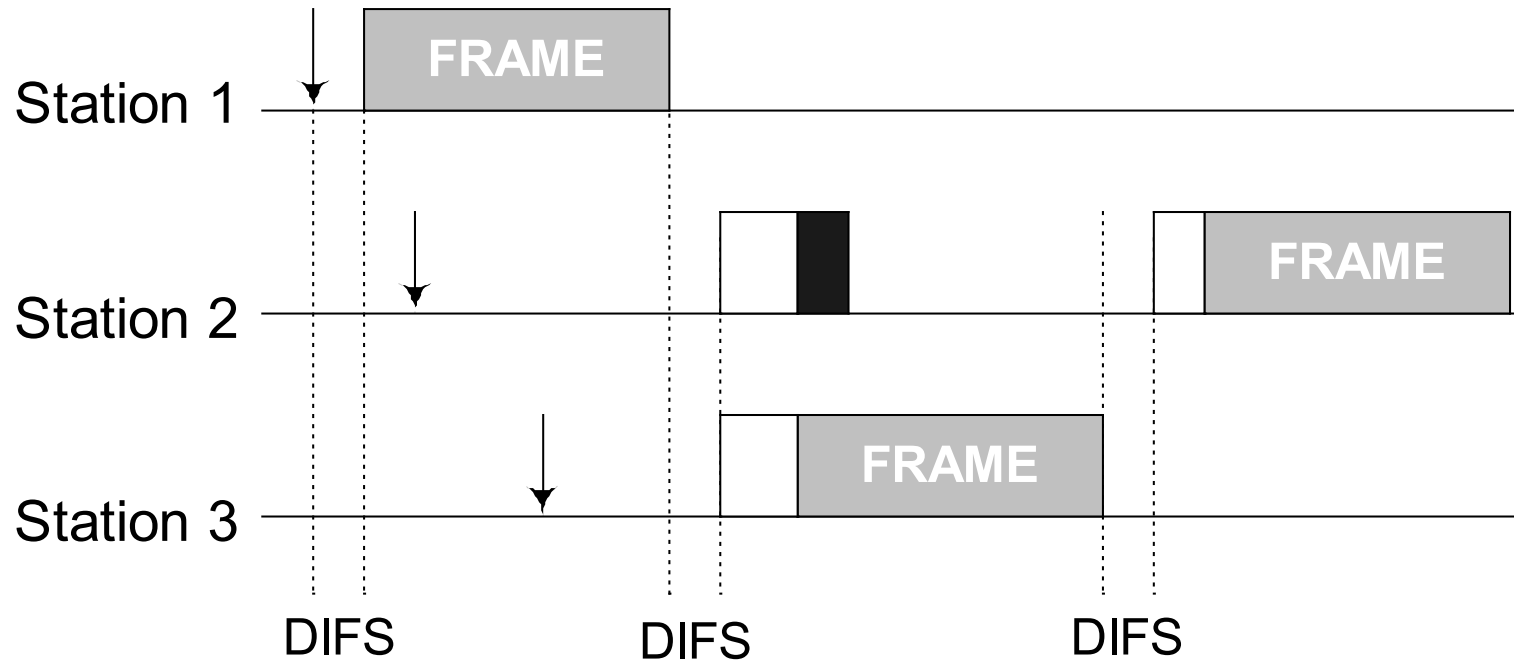

↓ Packet Arrival

■ Frame Transmission

□ Elapsed Backoff Time


■ Residual Backoff Time

IEEE 802.11 MAC Protocol: Backoff Algorithm

- Backoff interval
 - a slotted random time with uniform distribution in $[0, CW-1]$
- Contention Window (CW)
 - Initially, $CW = CW_{min}$
 - While missed ACK
 - $CW = 2 * CW$
 - Until $CW = CW_{max}$
- CW_{min} e CW_{max} are MAC parameters depending on the physical layer


Collisions

Multiple wireless senders/receivers create additional problems (beyond multiple access):

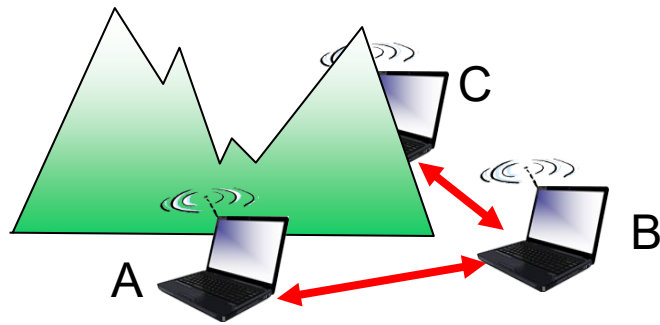

Hidden Node problem

- B, A hear each other
- B, C hear each other
- A, C can not hear each other, thus colliding at B
 - A and C unaware of their collision

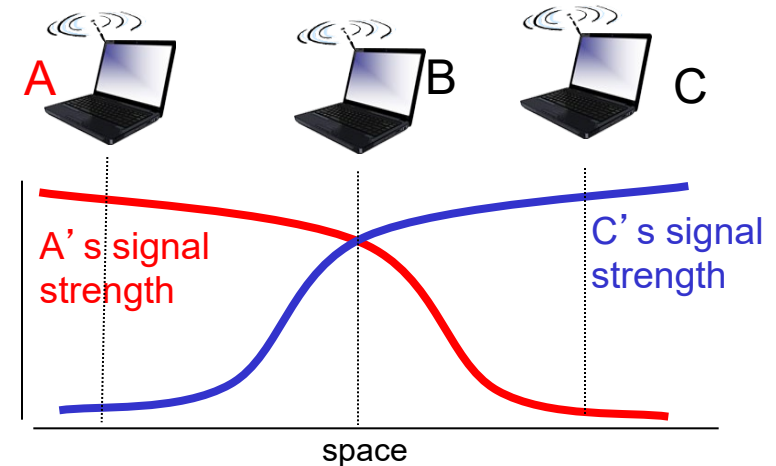


Signal attenuation:

- B, A hear each other
- B, C hear each other
- A, C can not hear each other colliding at B


Avoiding Collisions: Virtual Carrier Sensing

Idea: sender “reserves” channel use for data frames using small reservation packets


- Sender first transmits *small* **Request-To-Send (RTS)** packet to AP using CSMA
- AP broadcasts **clear-To-Send (CTS)** in response to RTS
- CTS heard by all nodes
 - sender transmits data frame
 - other stations defer transmissions

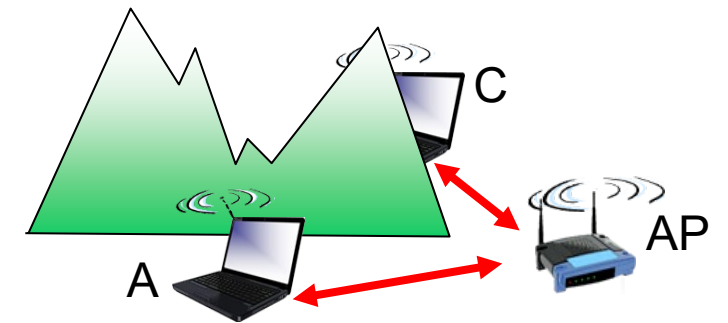

Virtual Carrier Sensing: RTS-CTS exchange

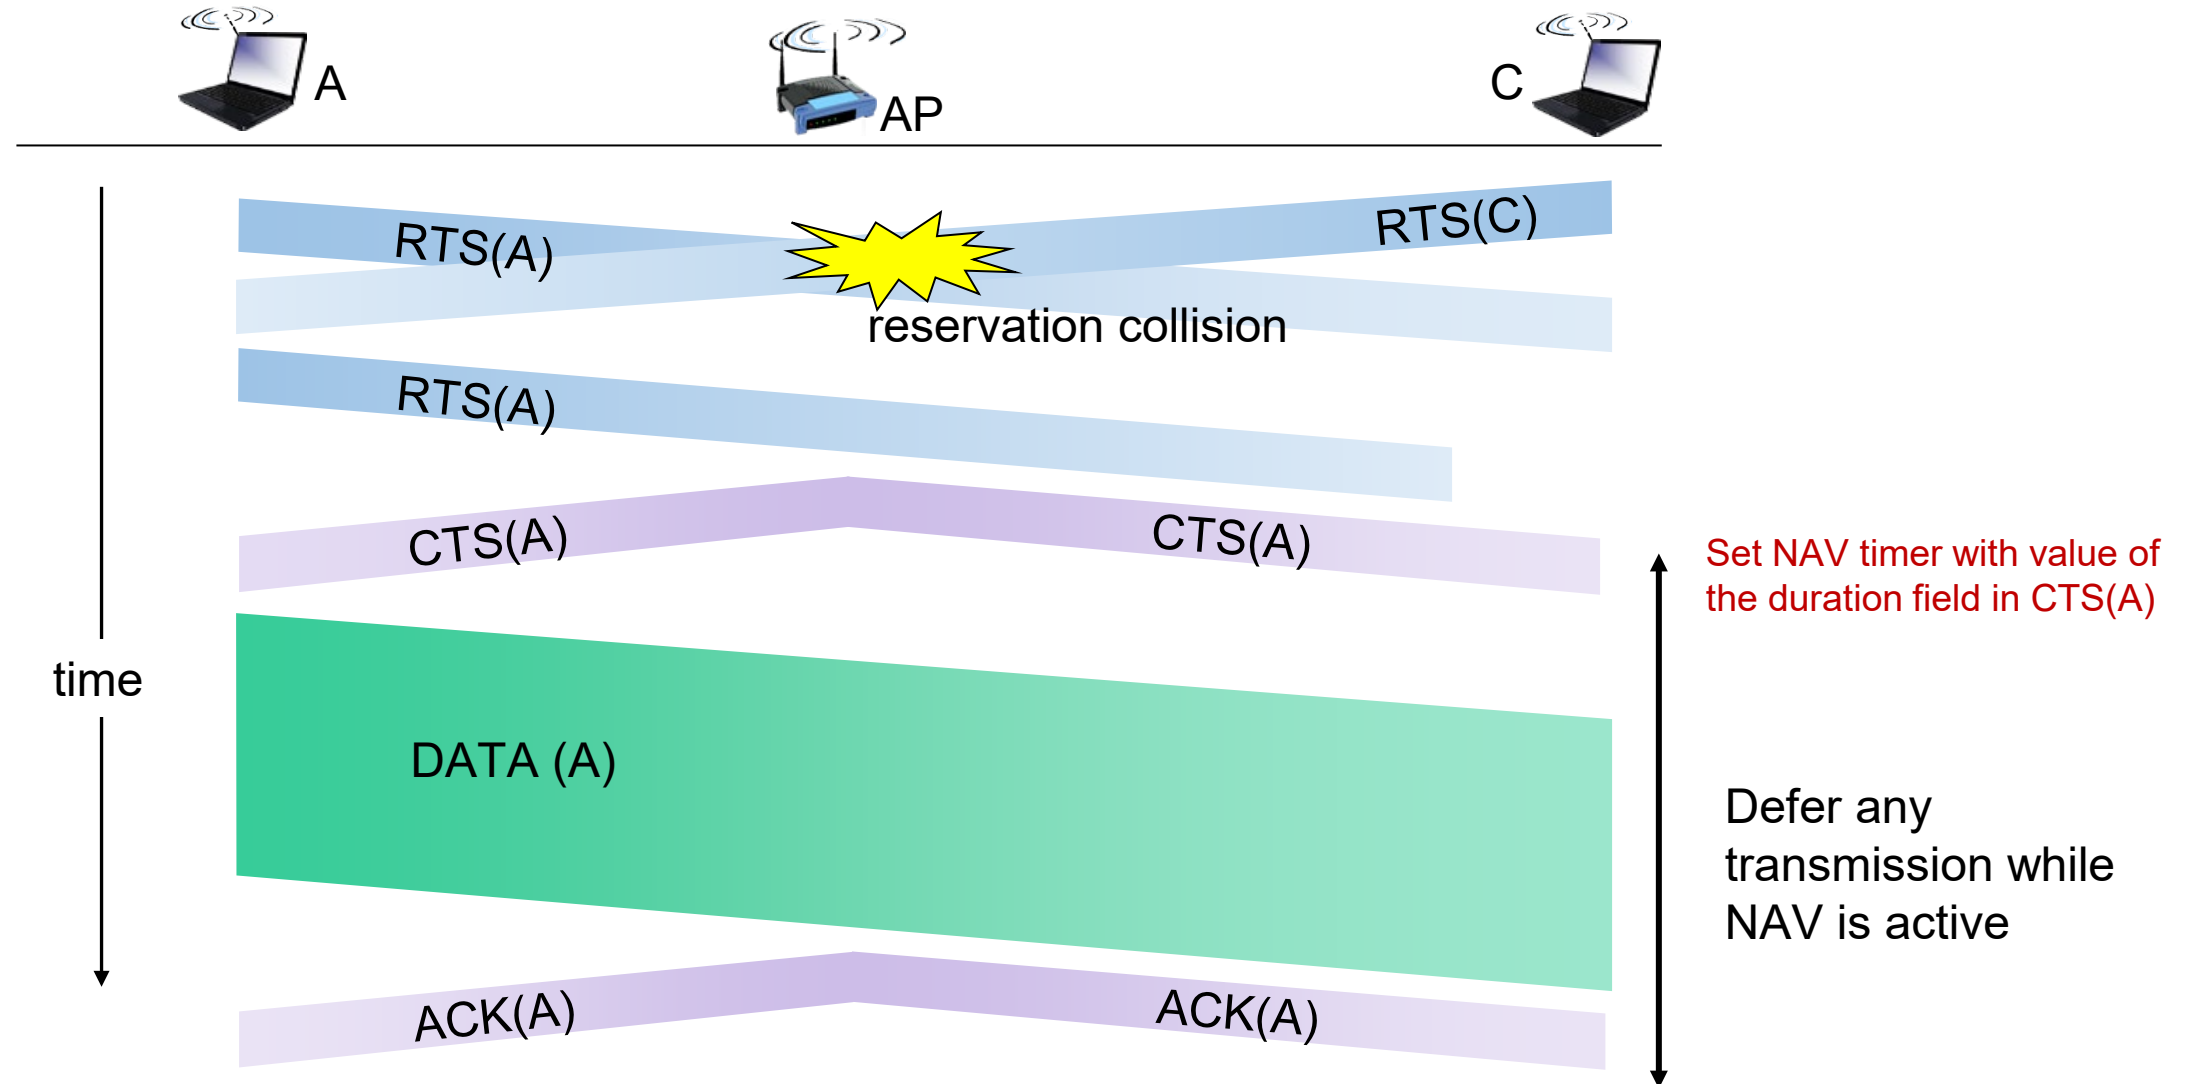

IEEE 802.11 Frame: Addressing

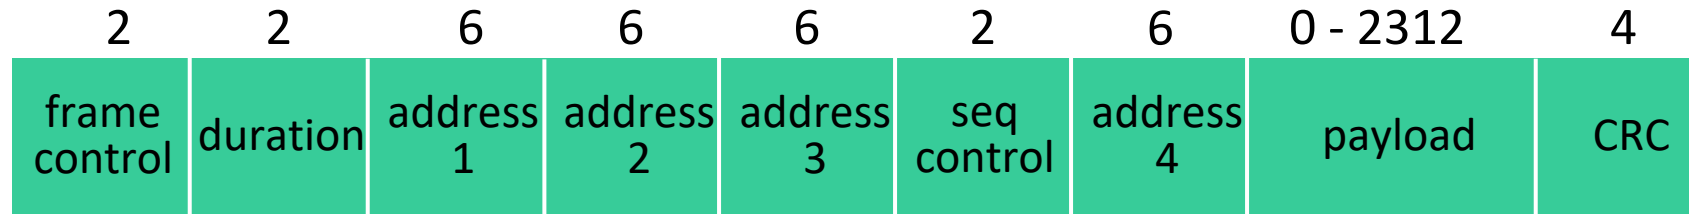


Address 1: MAC address of wireless host or AP to receive this frame

Address 2: MAC address of wireless host or AP transmitting this frame


Address 3: MAC address of router interface to which AP is attached

Address 4: used only in ad hoc mode

IEEE 802.11 Frame: Addressing

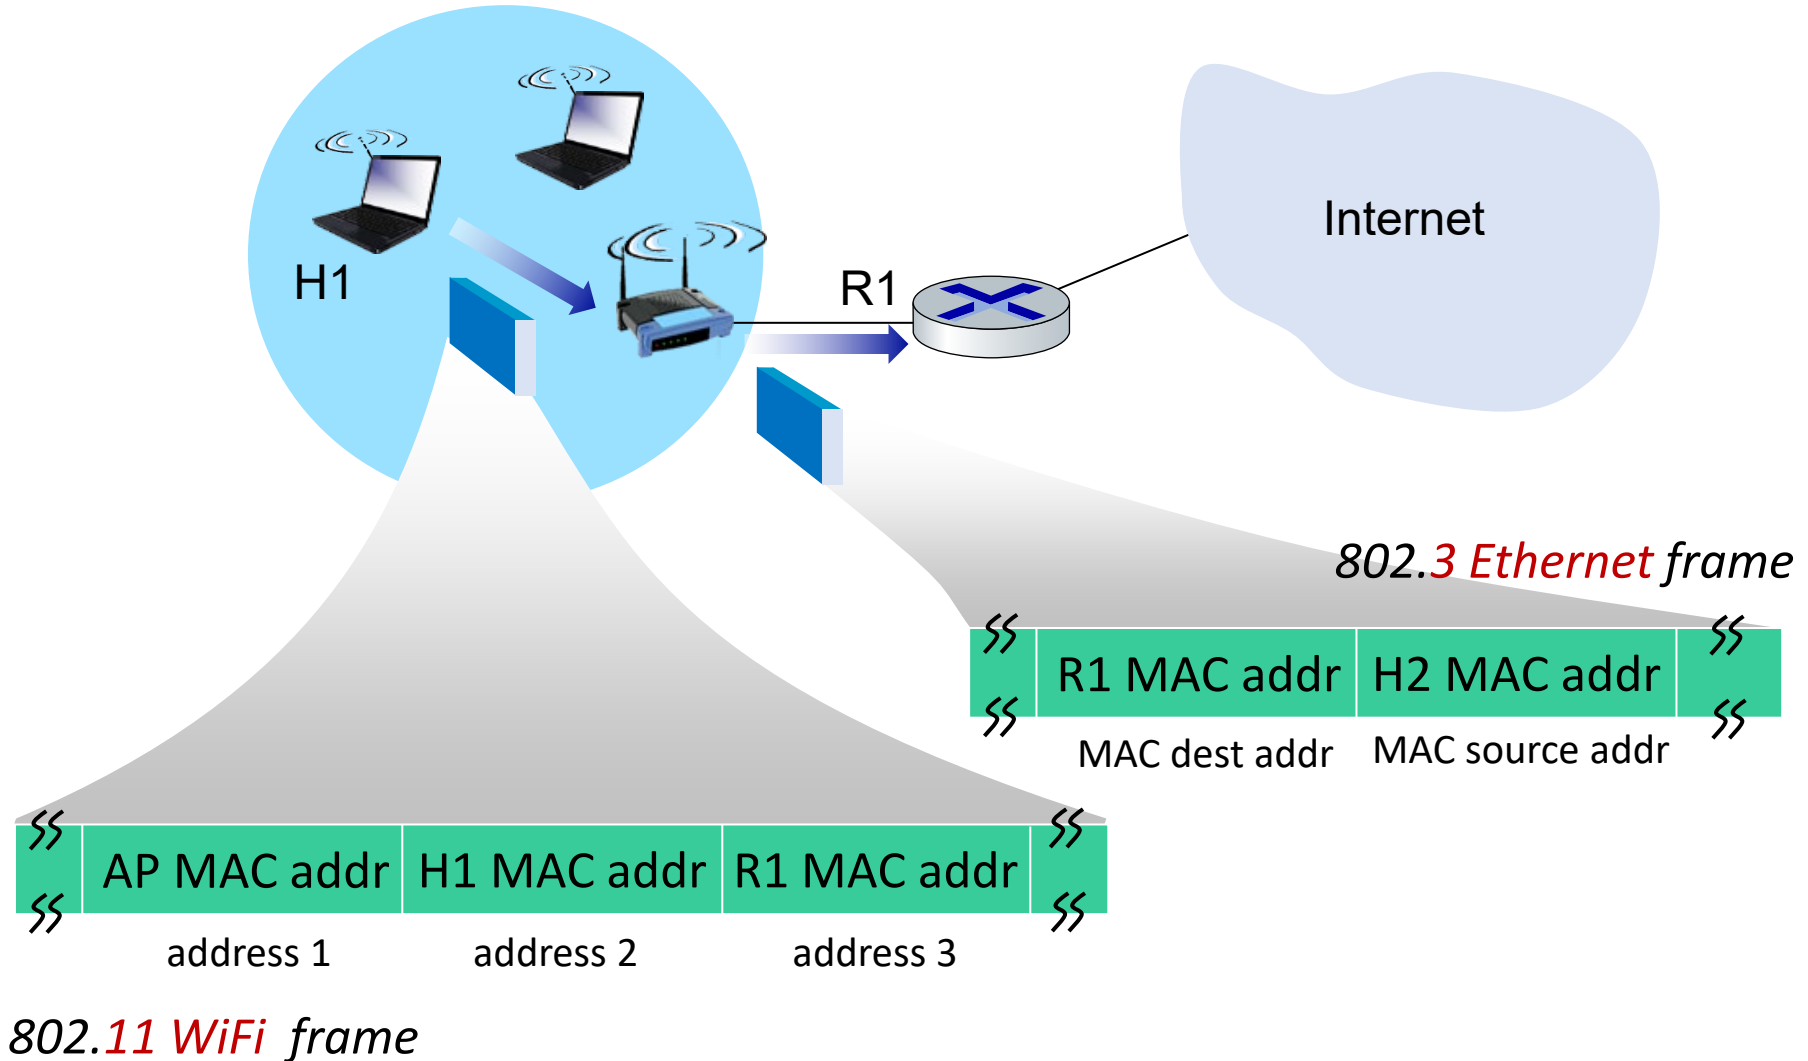


IEEE 802.11 Frame: Addressing

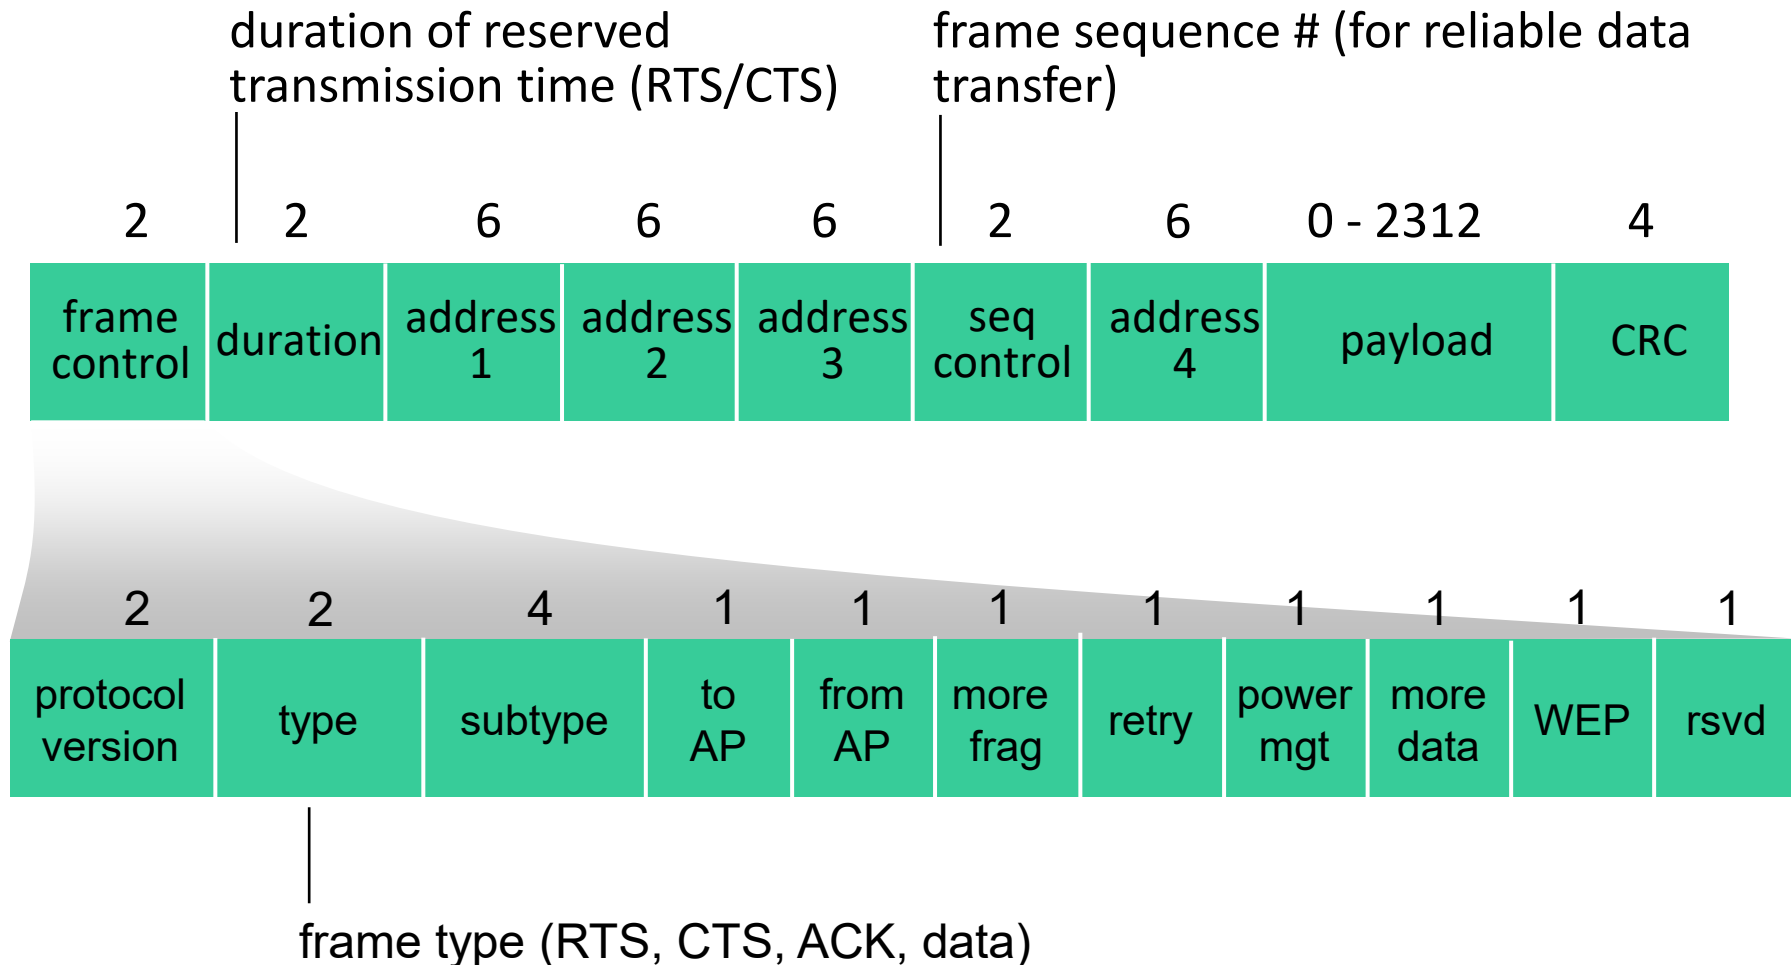

IEEE 802.11: Mobility within same subnet


- H1 remains in same IP subnet:
IP address can remain same
- Switch: which AP is associated with H1?
 - self-learning
 - switch will see frame from H1
and “remember” which switch
port can be used to reach H1

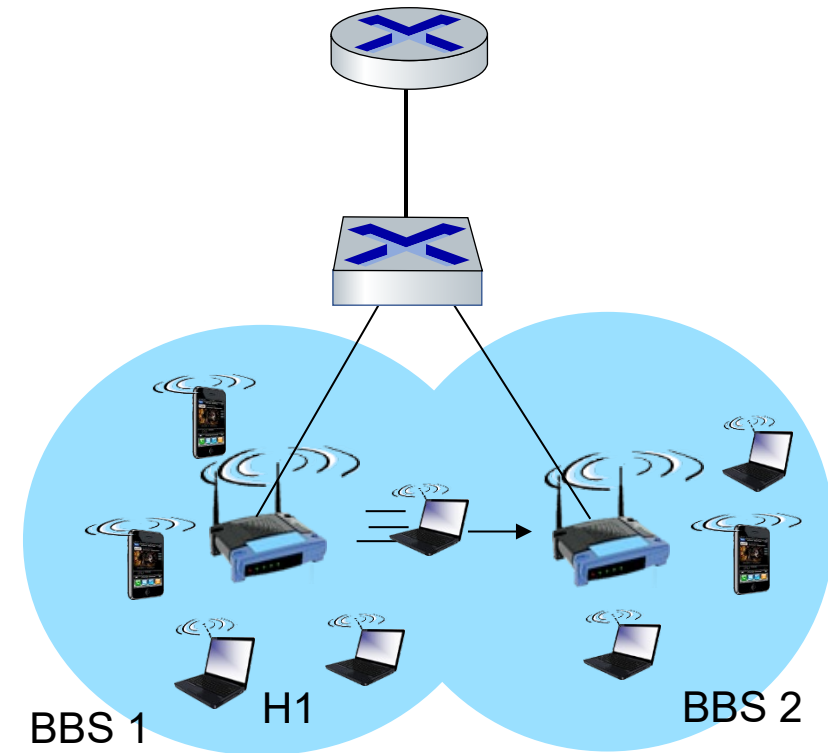

IEEE 802.11: advanced capabilities

Rate adaptation

- AP and mobile node dynamically change transmission rate
 - physical layer modulation technique
- As the mobile moves, SNR varies
 1. SNR decreases, BER increase as node moves away from base station
 2. When BER becomes too high, switch to lower transmission rate but with lower BER

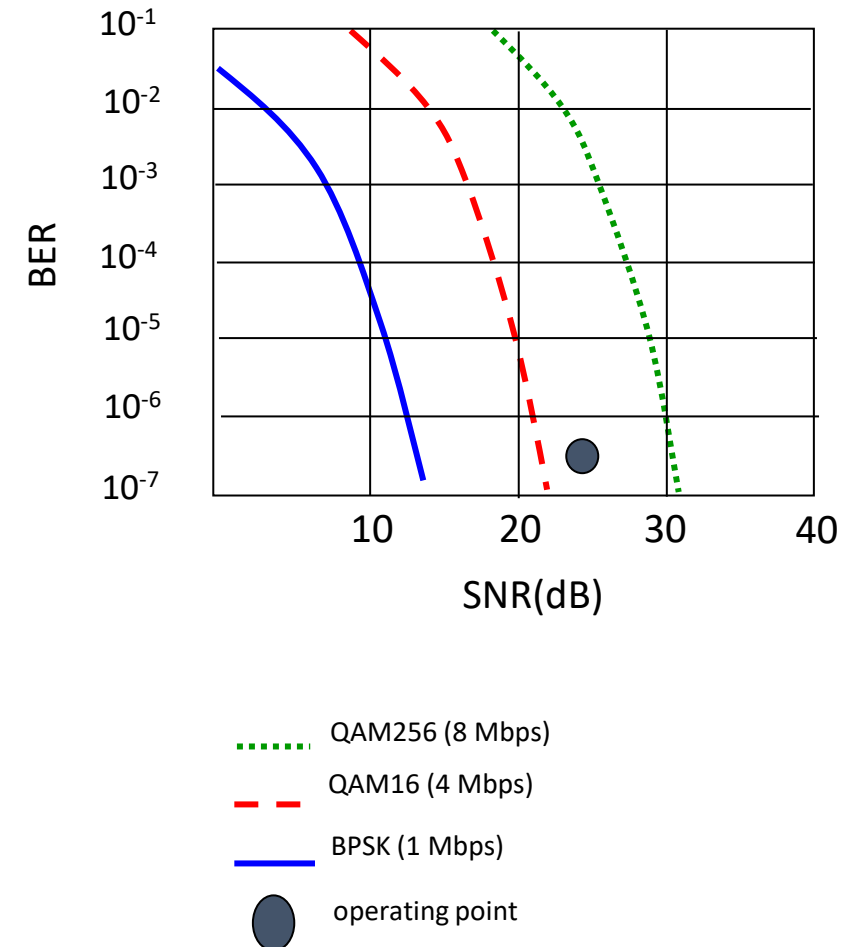

802.11: advanced capabilities

Power Management

- node-to-AP: “I am going to sleep until next beacon frame”
 - AP knows not to transmit frames to this node
 - node wakes up before next beacon frame
- *Beacon* frame
 - contains list of mobiles with AP-to-mobile frames waiting to be sent
 - node will stay awake if AP-to-mobile frames to be sent; otherwise sleep again until next beacon frame

Outline

- Introduction

Wireless

- Wireless Links and network characteristics
- Wireless LANs: WiFi/LiFi
- Wireless PANs: Bluetooth
- Cellular networks: 4G and 5G



Mobility

- Mobility management: principles
- Mobility: impact on higher-layer protocols

Light Fidelity (Li-Fi)

Wireless technology using LED light modulation to transmit information, instead of RF-based technologies, such as Wi-Fi

IEEE SA
STANDARDS
ASSOCIATION

IEEE Standard for Information Technology—
Telecommunications and Information Exchange between Systems
Local and Metropolitan Area Networks—
Specific Requirements


Part 11: Wireless LAN Medium Access Control
(MAC) and Physical Layer (PHY) Specifications

Amendment 6: Light Communications


IEEE Computer Society




STANDARDS

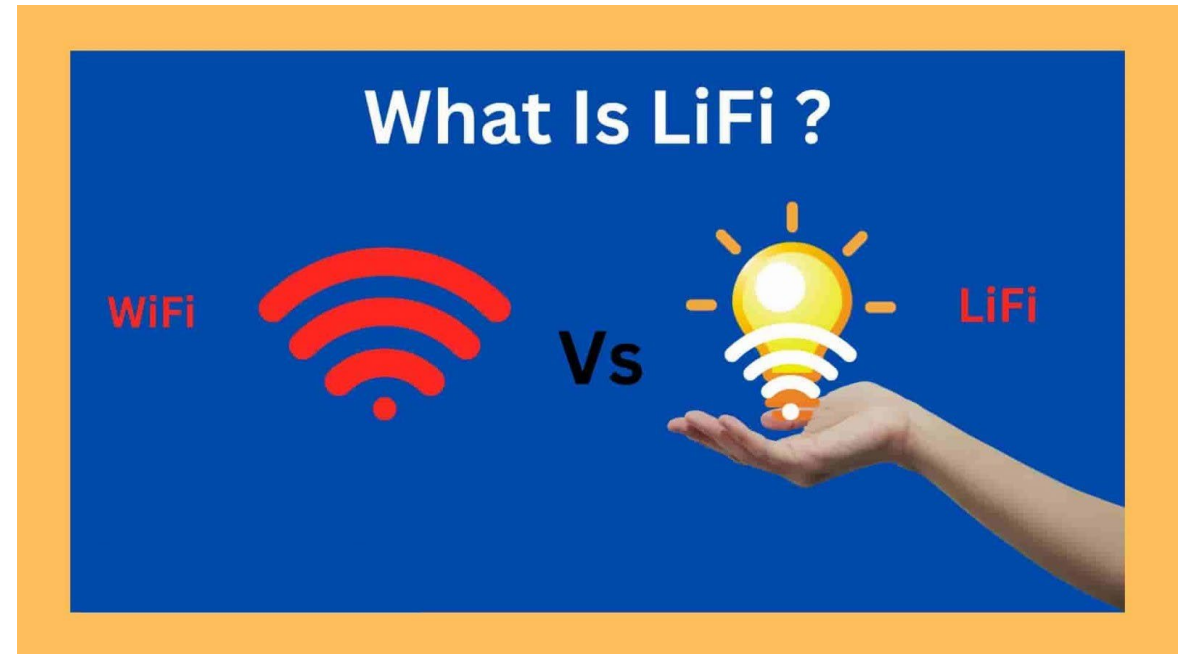

LiFi - Security

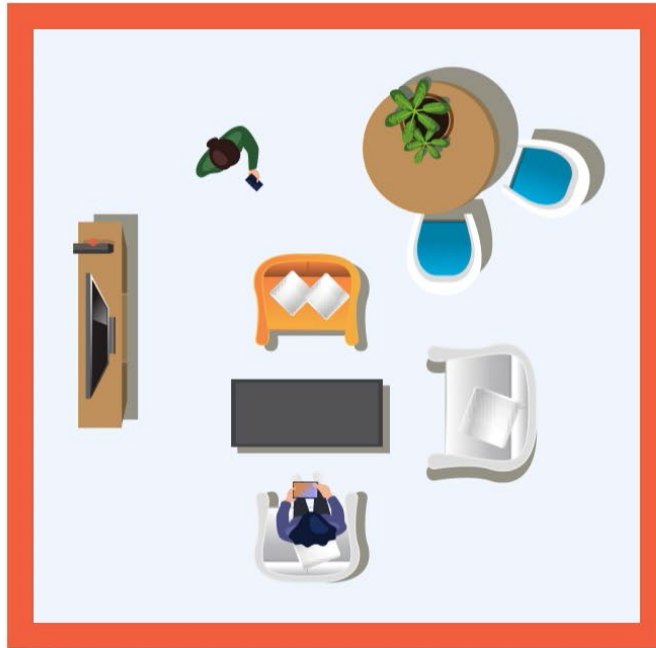


WiFi

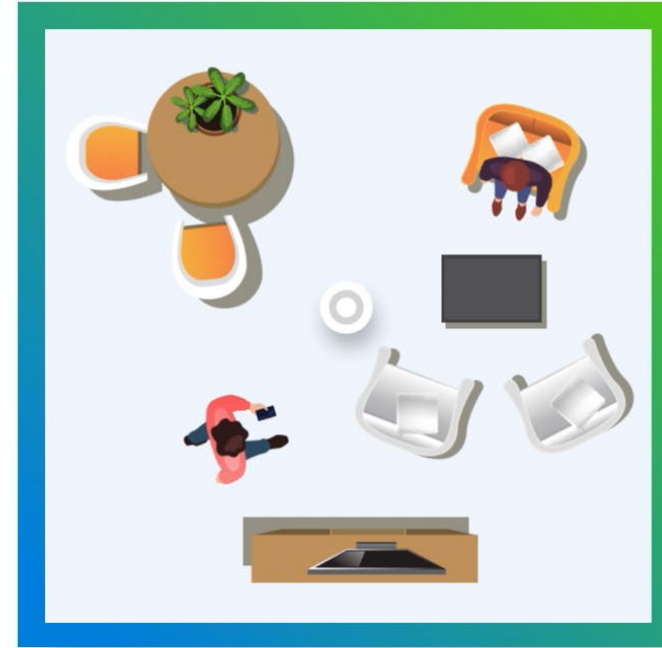


LiFi

LiFi - Interference

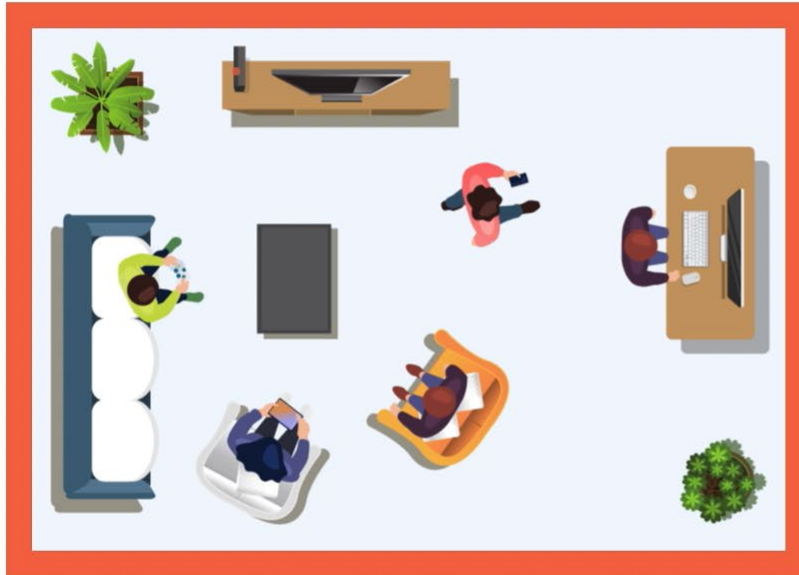

WiFi Router

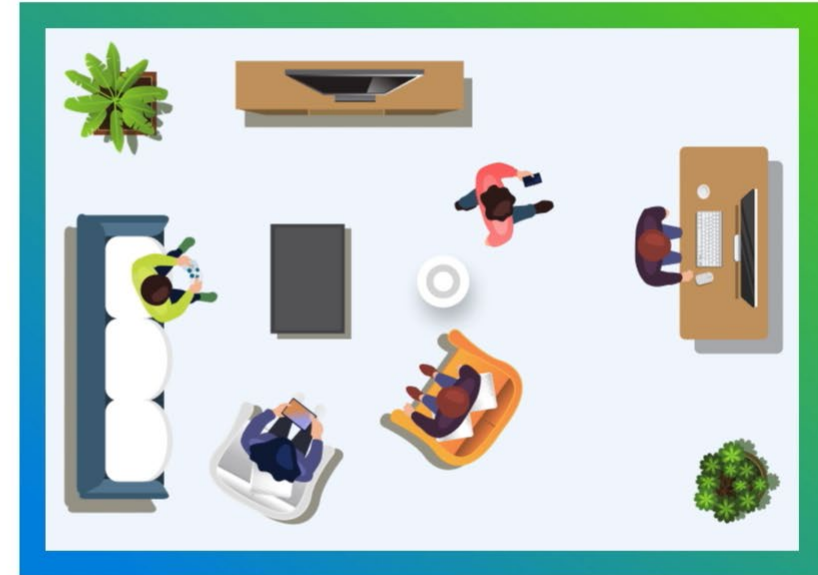

LiFi Access

LiFi - Advantages

■ Speed & Bandwidth

- LiFi can deliver multiple Gbps speeds in mobile devices

■ Enhanced Security

- Light can be contained and secured in a physical space
- LiFi enables additional control as LiFi offers precise localization for asset tracking and user authentication

■ Interference Free

- RF is vulnerable to interference from a wide range of devices such as cordless phones, microwaves and neighboring Wi-Fi networks

■ No Congestion

- LiFi doesn't suffer from the same congestion and poor effects from multi-user degradation as WiFi and other RF technologies


■ Reliability

- LiFi provides enhanced reliability enabling interference-free communications and 1000 times the data density, dramatically improving the user experience





■ Low Latency

- LiFi currently offers latency by a factor of three times lower than Wi-Fi and can radically enable innovation, automation, and applications such as AR and VR



LiFi – Experimental Setup

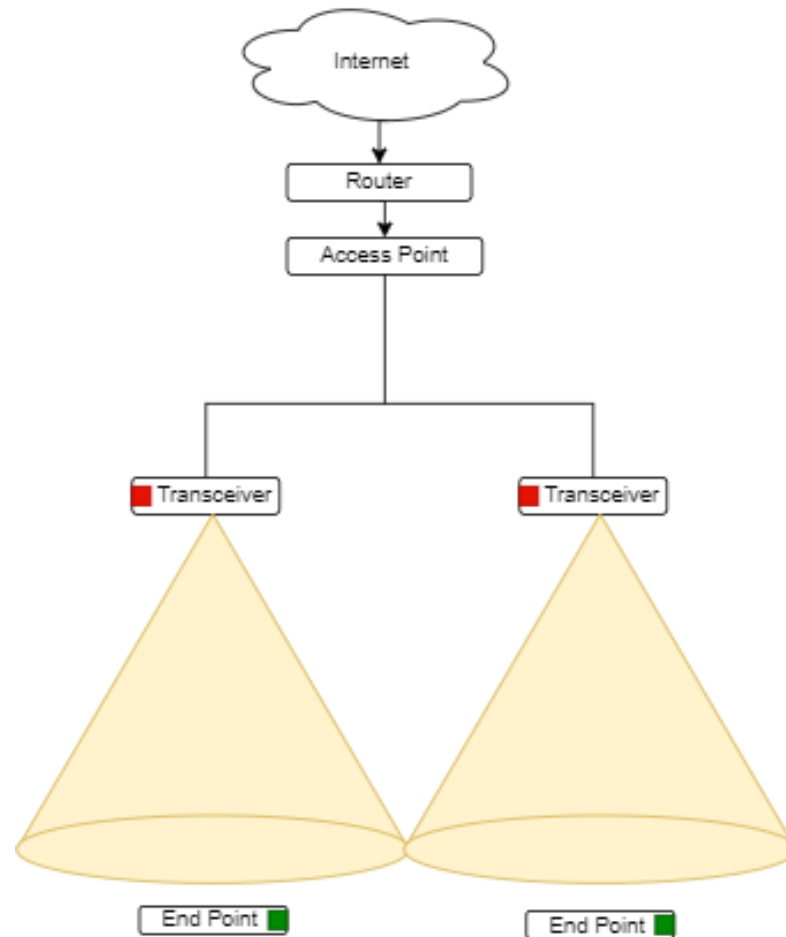

LiFi – Bit Rate

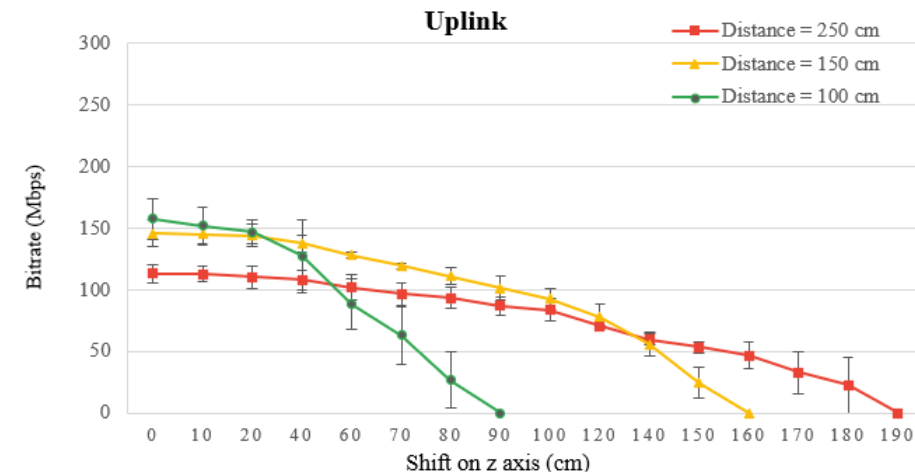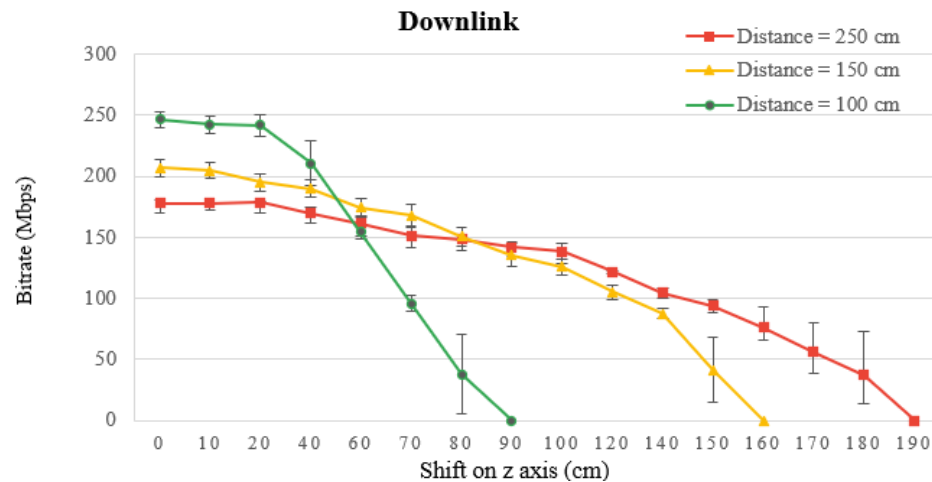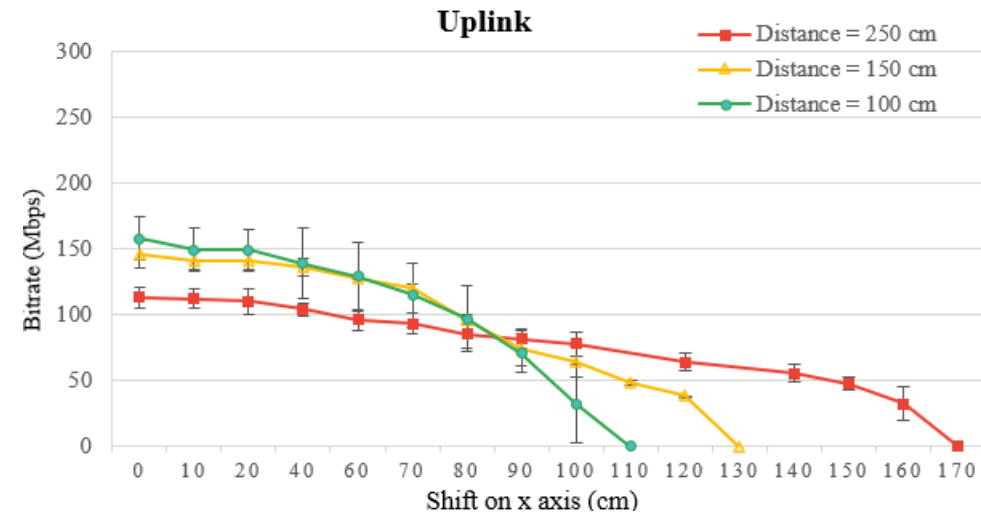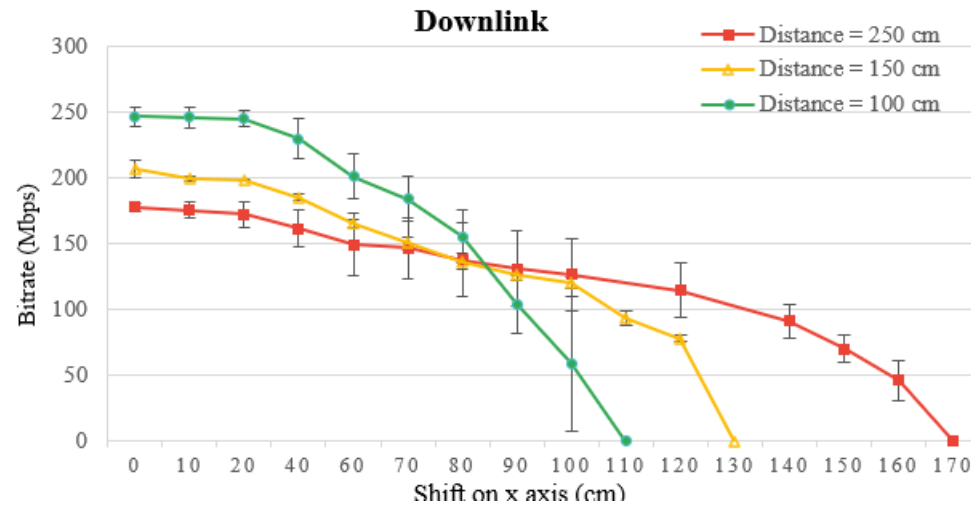

LiFi – Impact of Obstacles

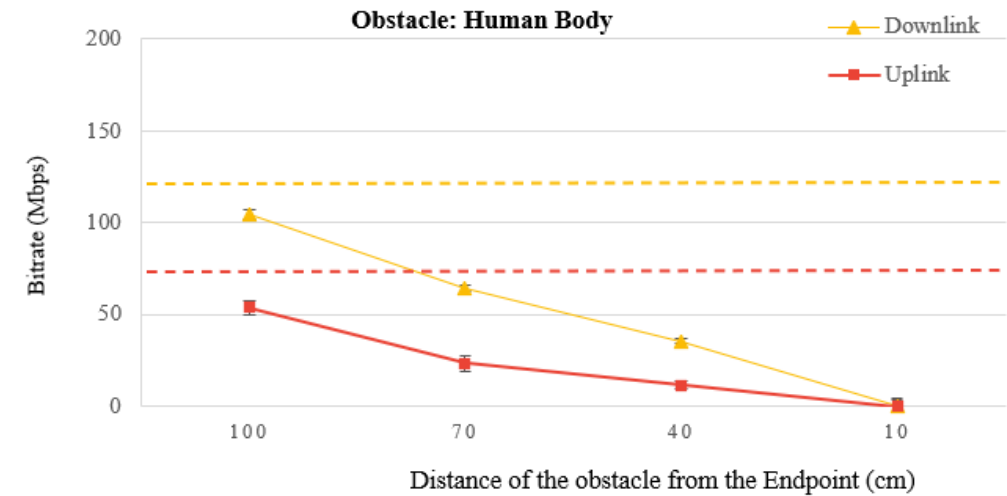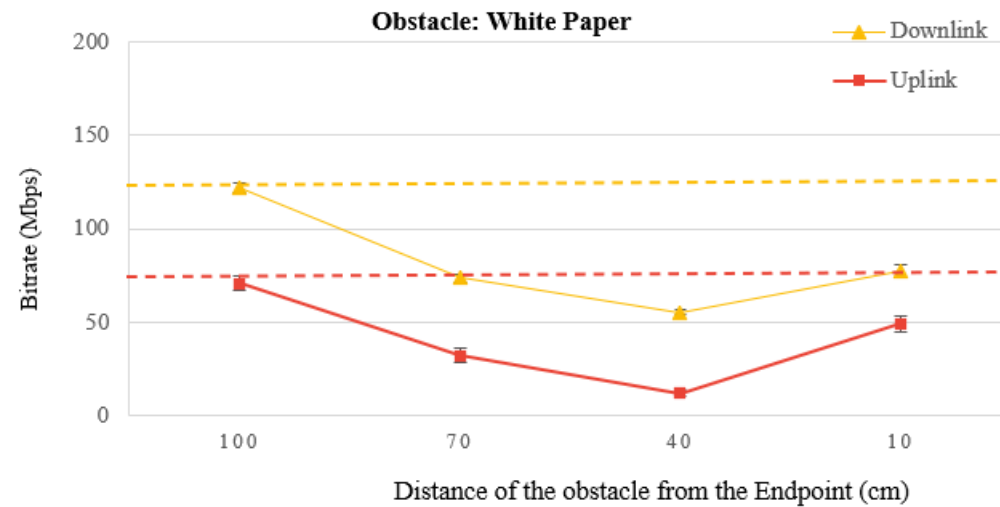

Outline

- Introduction

Wireless

- Wireless Links and network characteristics
- Wireless LANs: WiFi
- Wireless PANs: Bluetooth
- Cellular networks: 4G and 5G




Mobility

- Mobility management: principles
- Mobility: impact on higher-layer protocols

Personal Area Networks: Bluetooth


- Less than 10 m diameter
- Replacement for cables
 - mouse, keyboard, headphones, ...
- *ad hoc*: no infrastructure
- 2.4-2.5 GHz ISM radio band
- Data rate up to 3 Mbps
- Multiple access based on Polling
 - Master polls a client at a time
 - Polled client replies with a data (or null) packet

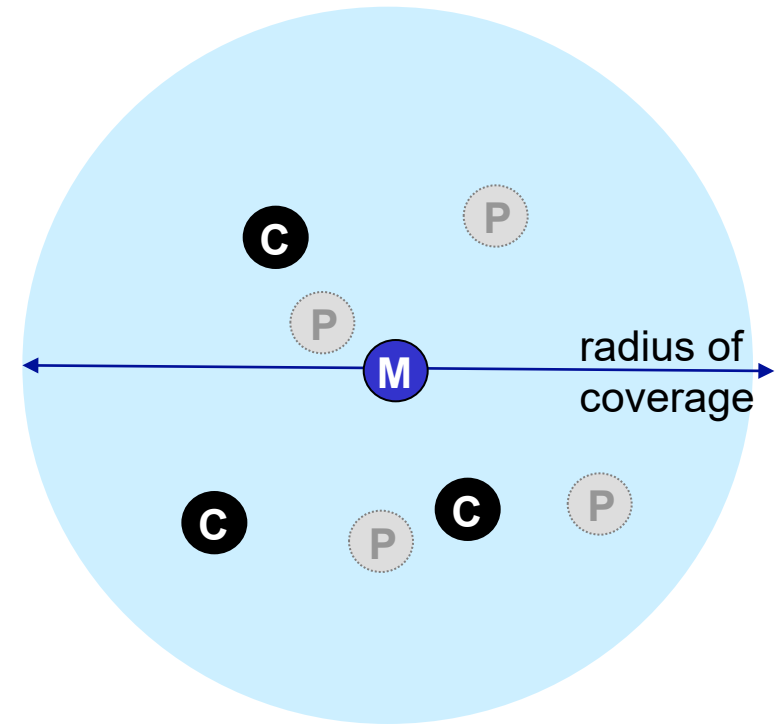

- M** master device
- C** client device
- P** parked device (inactive)

Personal area networks: Bluetooth

- TDM, 625 μ sec sec. slot
- Frequency Hopping
 - sender uses 79 frequency channels in known, pseudo-random order slot-to-slot
 - other devices/equipment not in piconet only interfere in some slots
- **Parked mode:** clients can “go to sleep” (park) and later wakeup to preserve battery
- **Bootstrapping:** nodes self-assemble (plug and play) into piconet

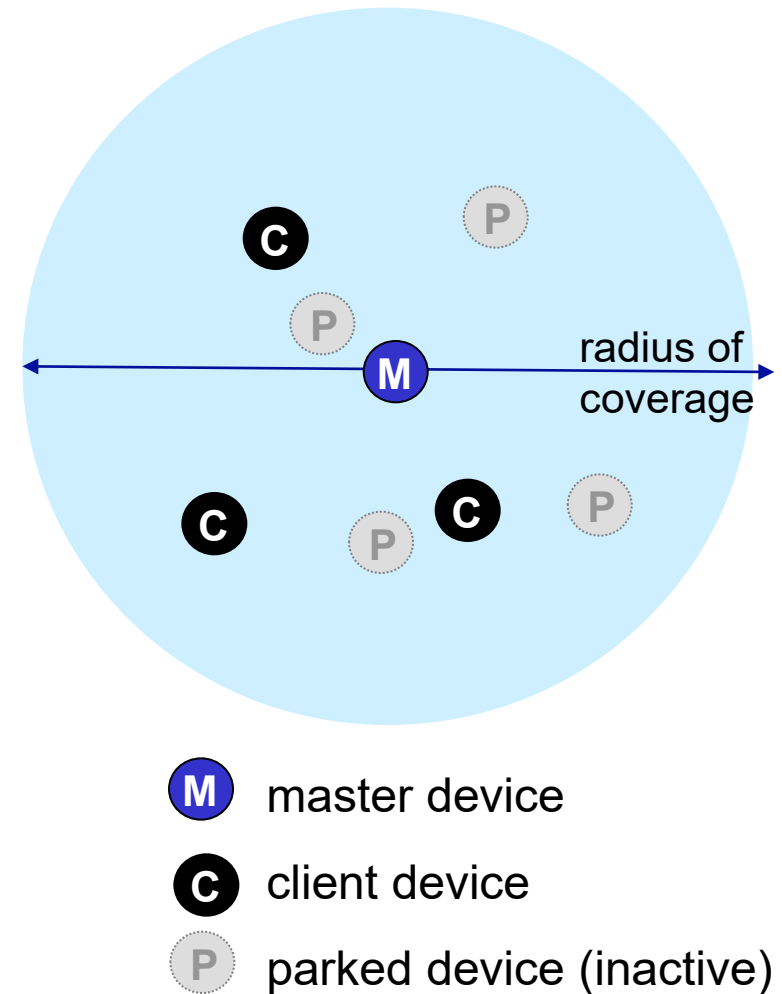

Outline

- Introduction

Wireless

- Wireless Links and network characteristics
- Wireless LANs: WiFi
- Wireless PANs: Bluetooth
- Cellular networks: 4G and 5G



Mobility

- Mobility management: principles
- Mobility: impact on higher-layer protocols

4G/5G cellular networks

- *The* solution for wide-area mobile Internet
- Widespread deployment/use
 - more mobile-broadband-connected devices than fixed-broadband-connected devices (5-1 in 2019)!
 - 4G availability: 97% of time in Korea (90% in US)
- Transmission rates up to 100's Mbps
- Technical standards: 3rd Generation Partnership Project (3GPP)
 - www.3gpp.org
 - 4G: Long-Term Evolution (LTE) standard

4G/5G cellular networks

Similarities to wired Internet

- edge/core distinction, but both below to same carrier
- global cellular network: a network of networks
- widespread use of protocols we've studied: HTTP, DNS, TCP, UDP, IP, NAT, separation of data/control planes, SDN, Ethernet, tunneling
- interconnected to wired Internet


Differences from wired Internet

- different wireless link layer
- mobility as a 1st class service
- user "identity" (via SIM card)
- business model: users subscribe to a cellular provider
 - strong notion of "home network" versus roaming on visited nets
 - global access, with authentication infrastructure, and inter-carrier settlements

Elements of 4G LTE architecture

Mobile device:


- smartphone, tablet, laptop, IoT, ... with 4G LTE radio
- 64-bit International Mobile Subscriber Identity (IMSI), stored on SIM (Subscriber Identity Module) card
- LTE jargon: User Equipment (UE)

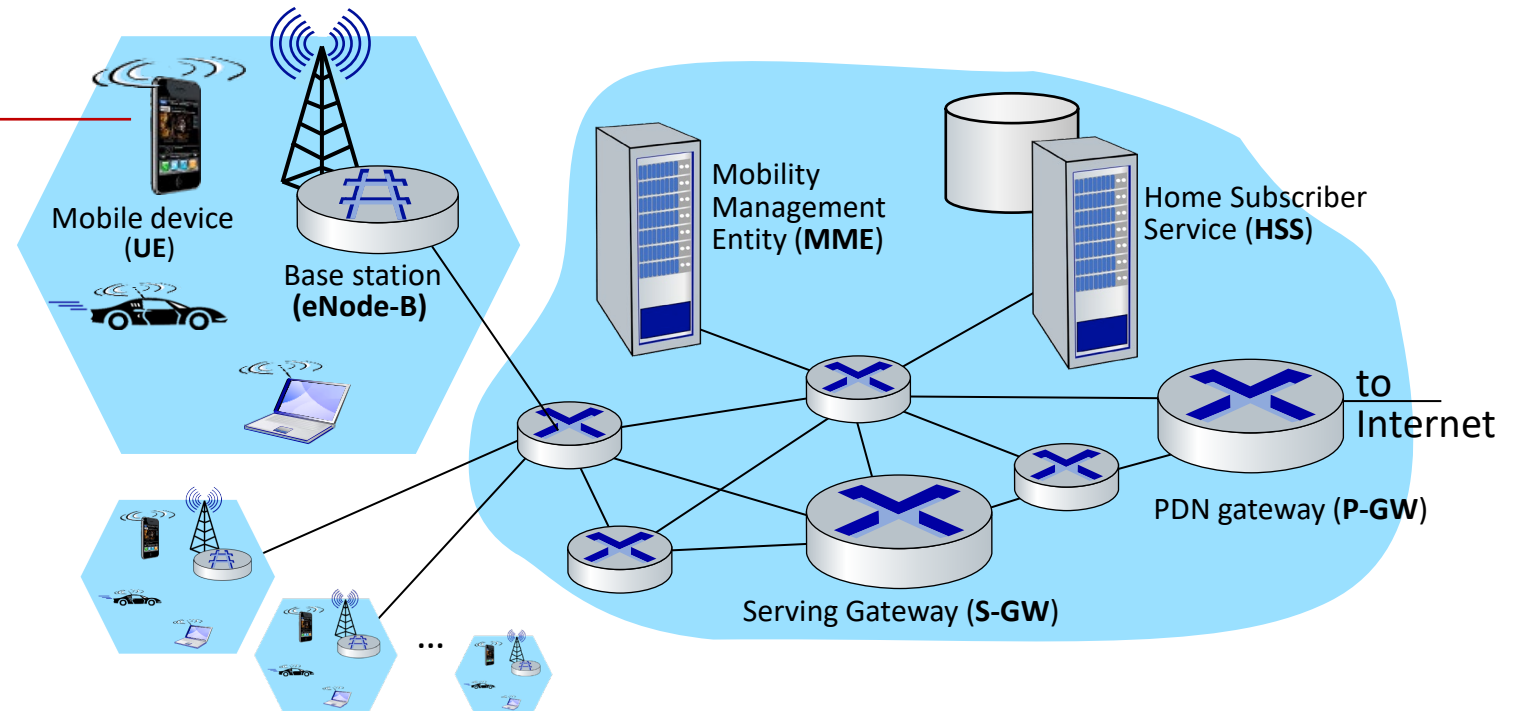

Elements of 4G LTE architecture

Base station:


- at “edge” of carrier’s network
- manages wireless radio resources, mobile devices in its coverage area (“cell”)
- coordinates device authentication with other elements
- similar to WiFi AP but:
 - active role in user mobility
 - coordinates with nearby base stations to optimize radio use
- LTE jargon: eNode-B

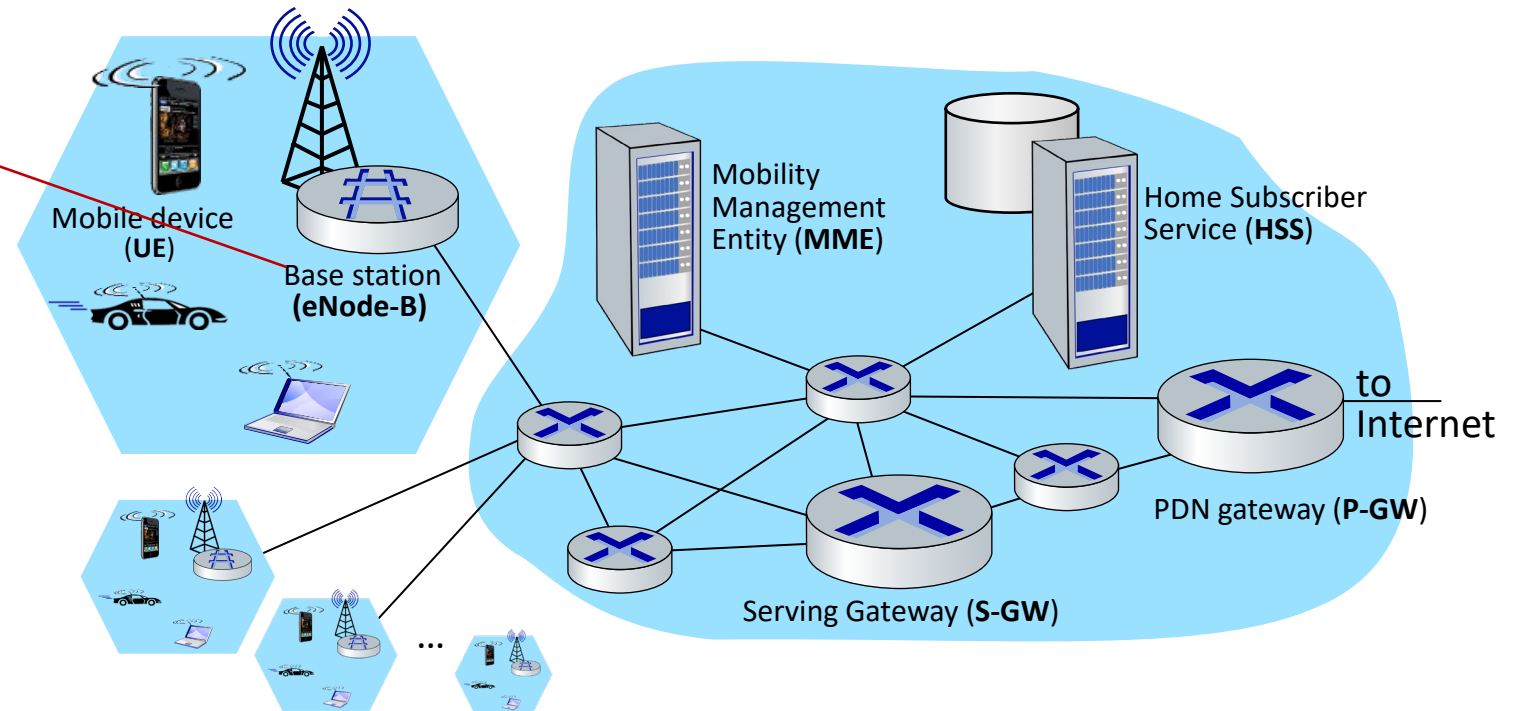

Elements of 4G LTE architecture

Home Subscriber Service


- stores info about mobile devices for which the HSS's network is their "home network"
- works with MME in device authentication

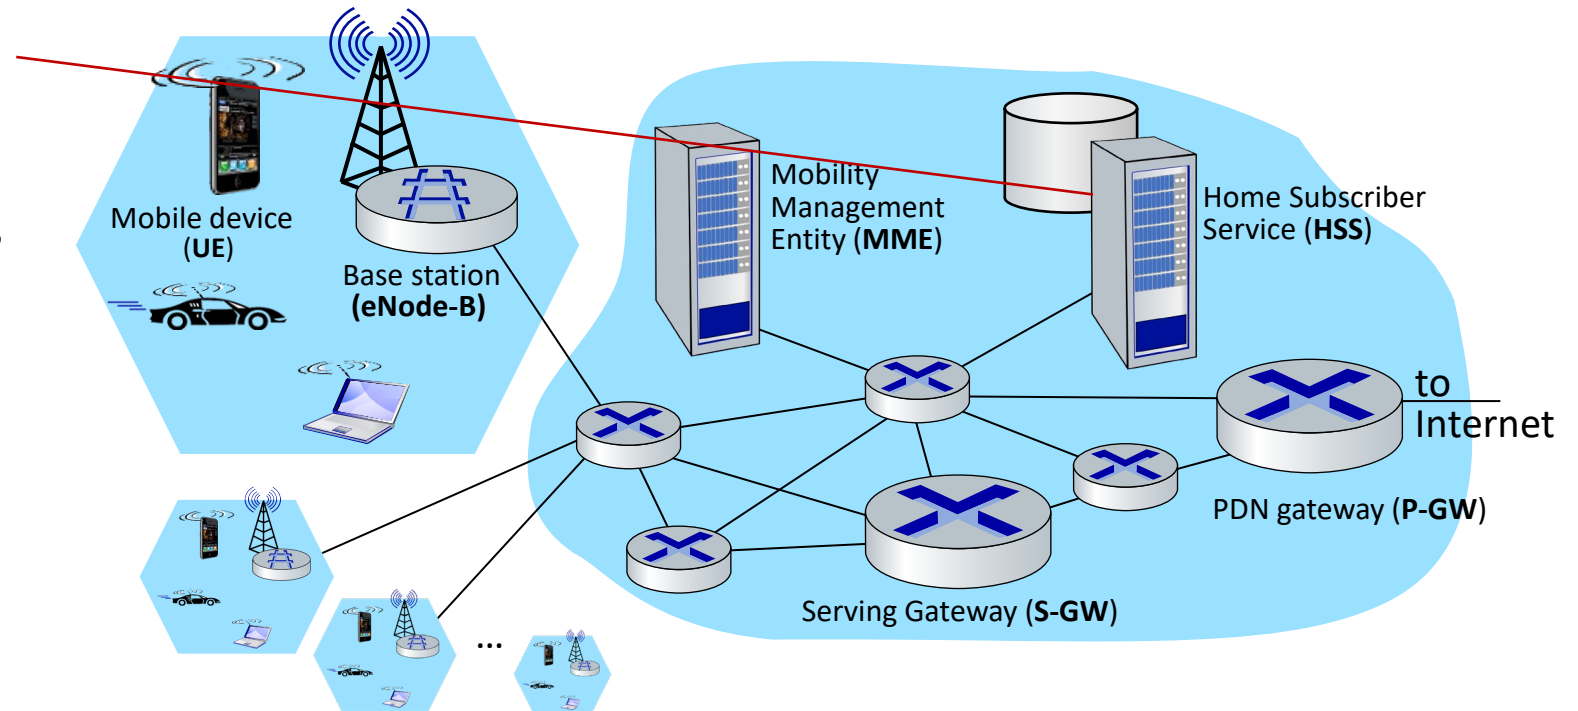

Elements of 4G LTE architecture

Serving Gateway (S-GW), PDN Gateway (P-GW)


- lie on data path from mobile to/from Internet
- P-GW
 - gateway to mobile cellular network
 - Looks like any other internet gateway router
 - provides NAT services
- other routers:
 - extensive use of tunneling

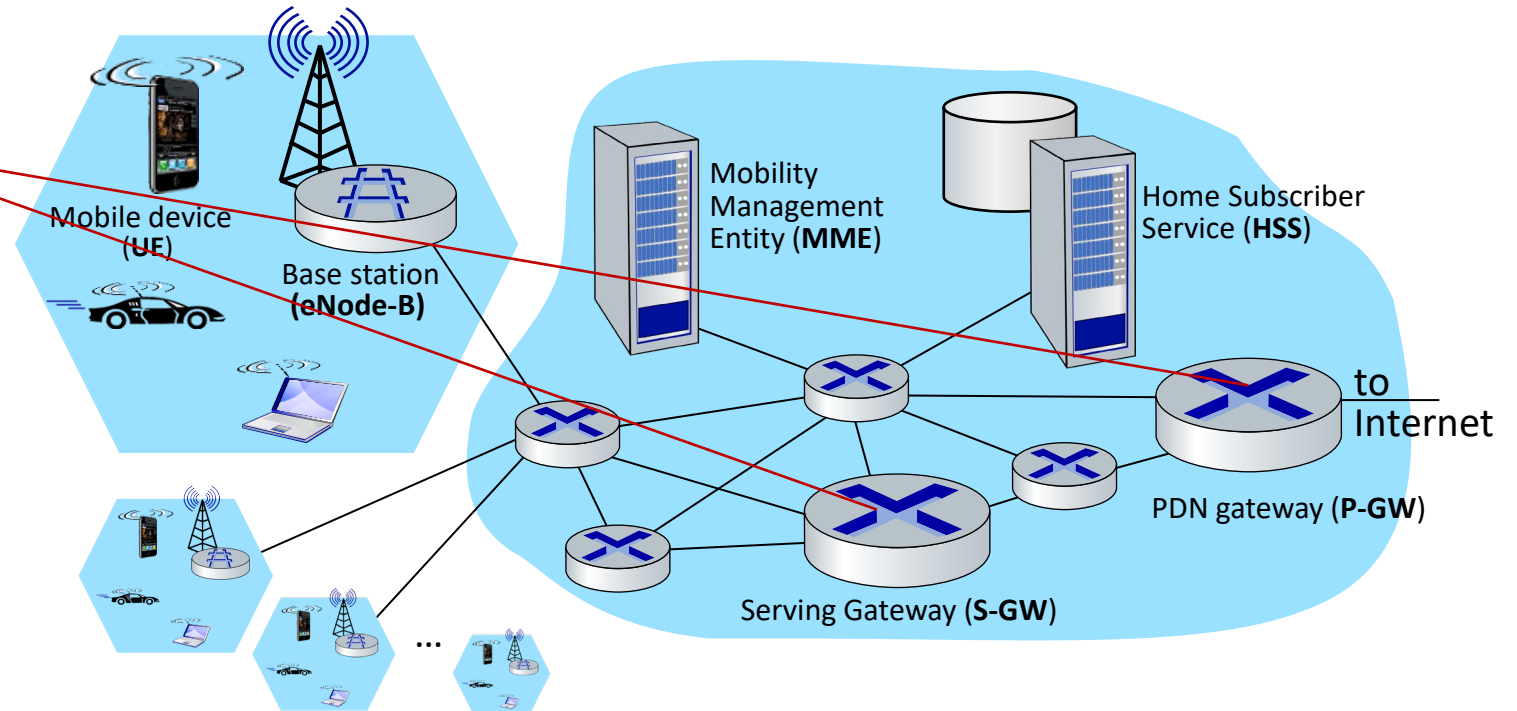


Elements of 4G LTE architecture

Mobility Management Entity

- device authentication (device-to-network, network-to-device) coordinated with mobile home network HSS
- mobile device management:
 - device handover between cells
 - tracking/paging device location
- path (tunneling) setup from mobile device to P-GW

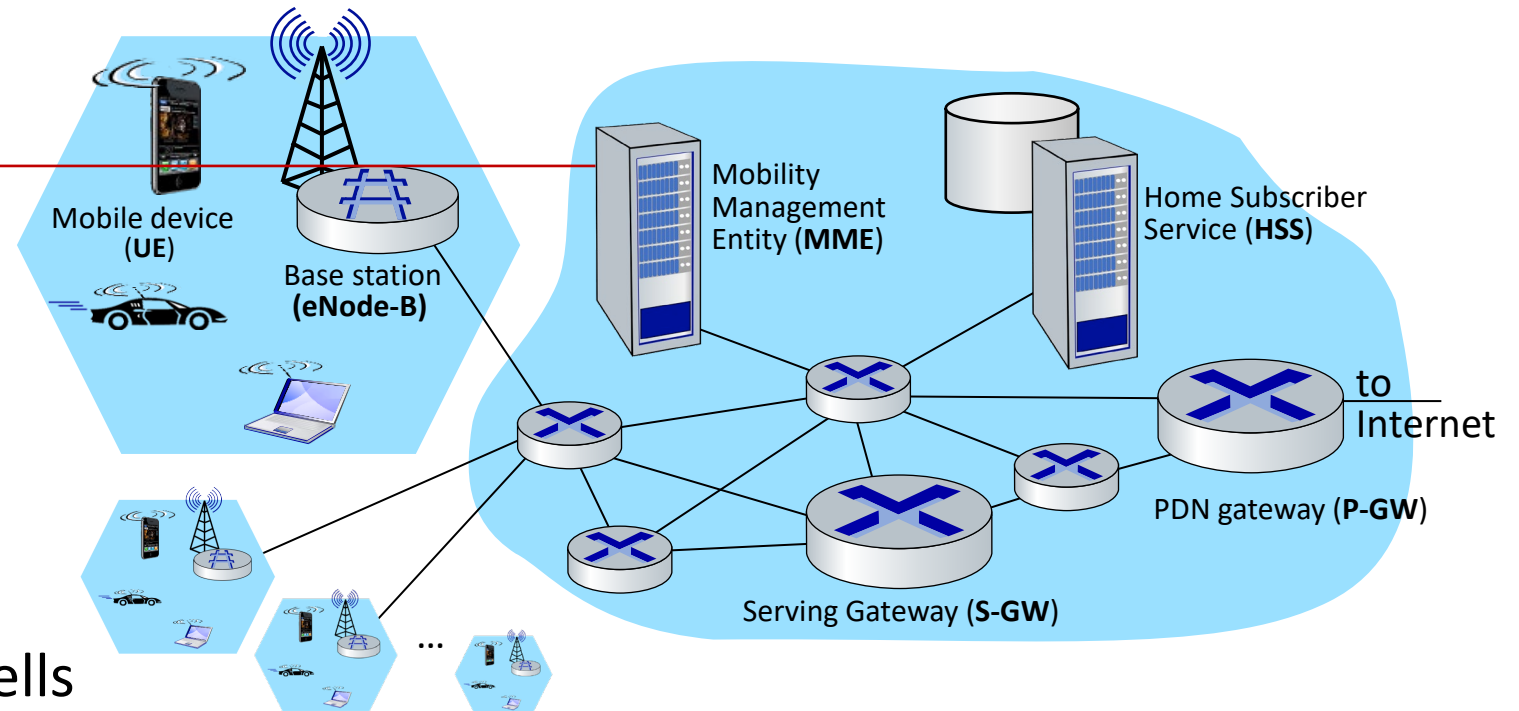


LTE: data plane control plane separation

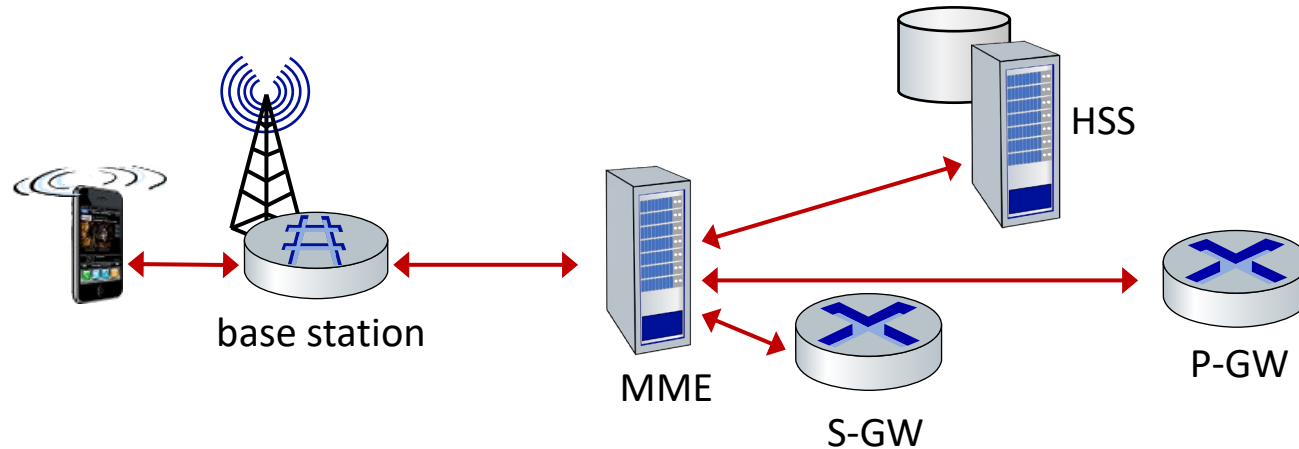

control plane

- new protocols for mobility management , security, authentication

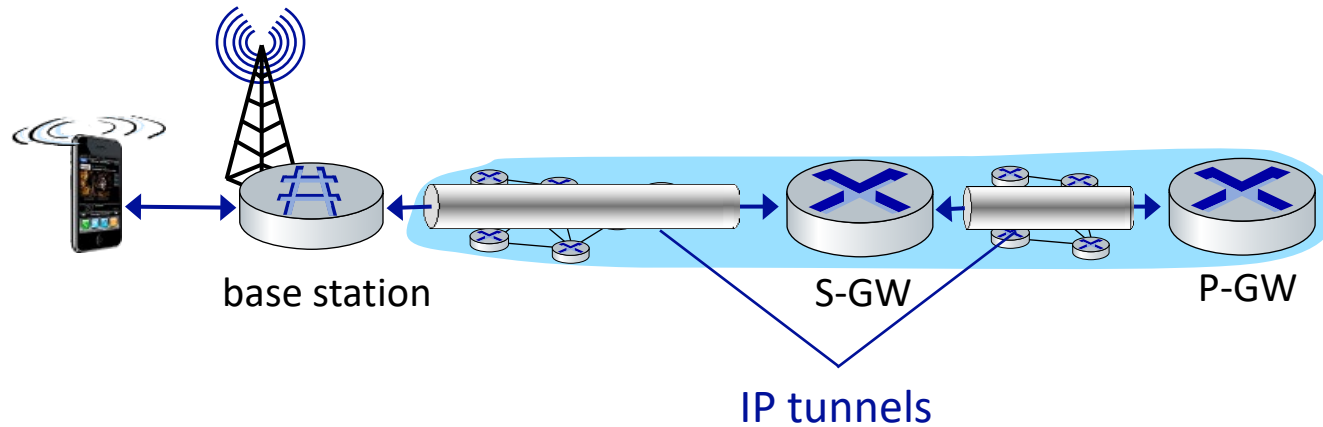


data plane

- new protocols at link, physical layers
- extensive use of tunneling to facilitate mobility


LTE data plane protocol stack: first hop

LTE link layer protocols:

- Packet Data Convergence: header compression, encryption
- Radio Link Control (RLC) Protocol: fragmentation/reassembly, reliable data transfer
- Medium Access: requesting, use of radio transmission slots

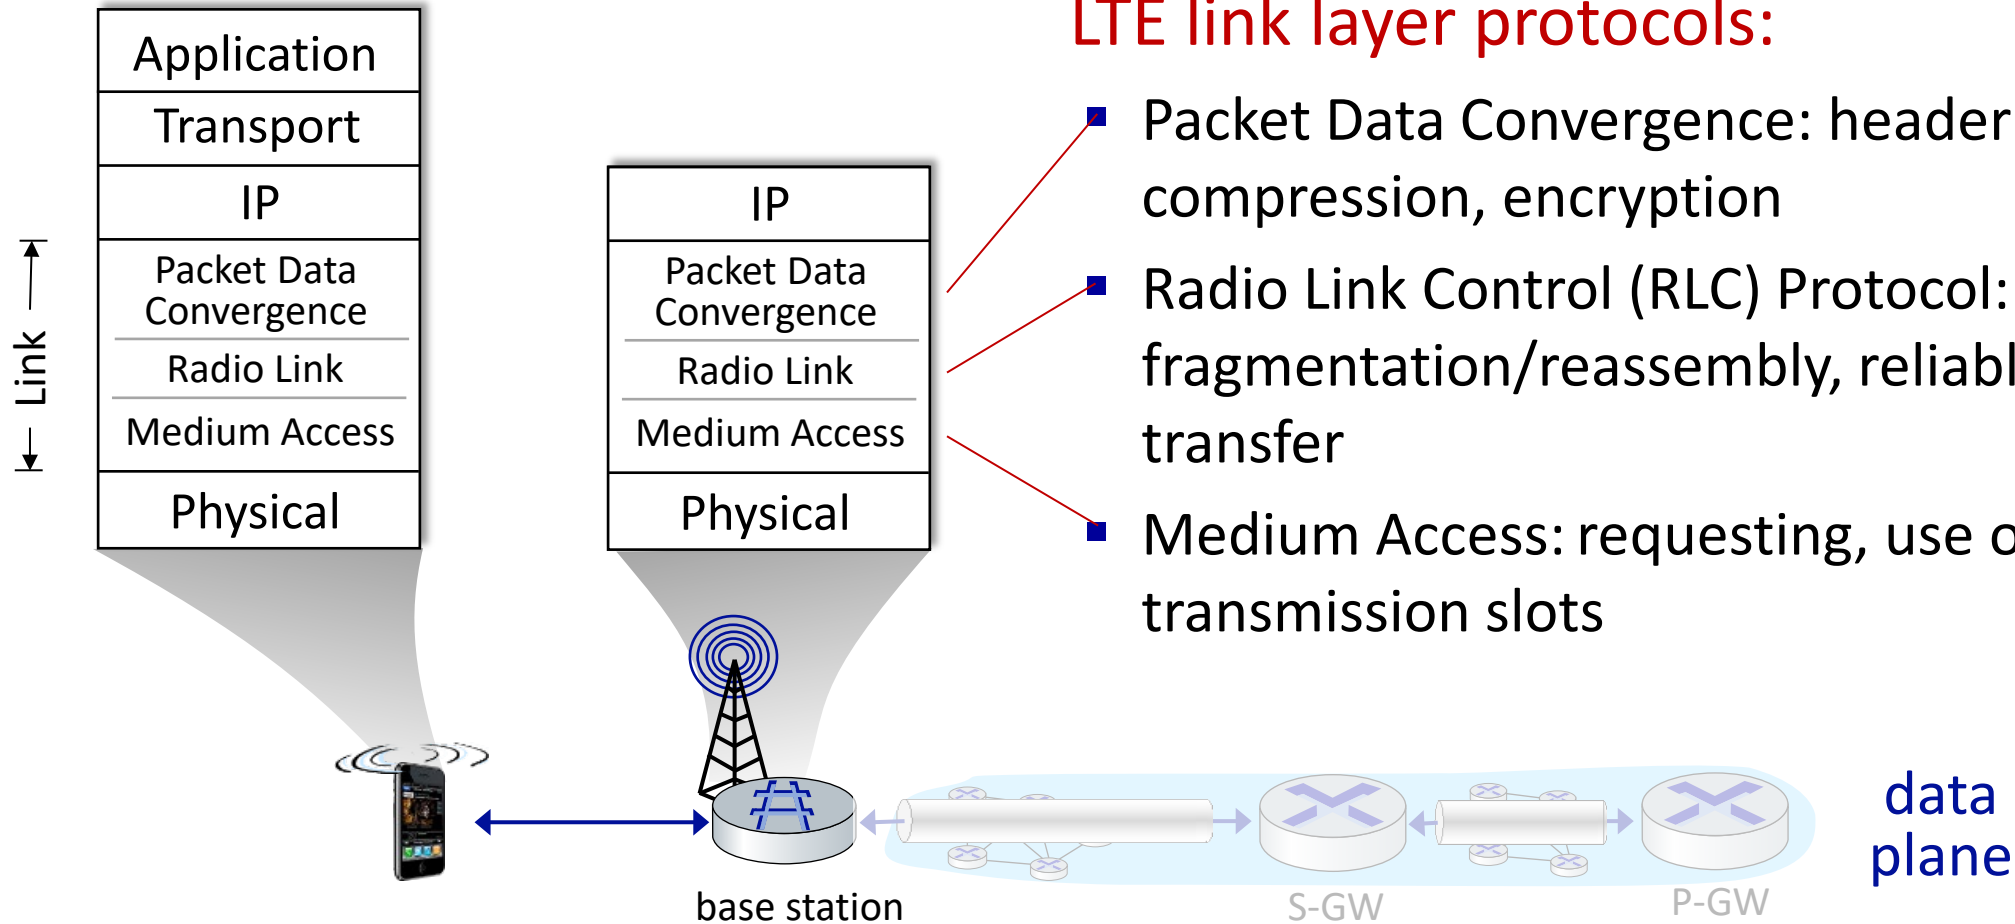


LTE data plane protocol stack: first hop

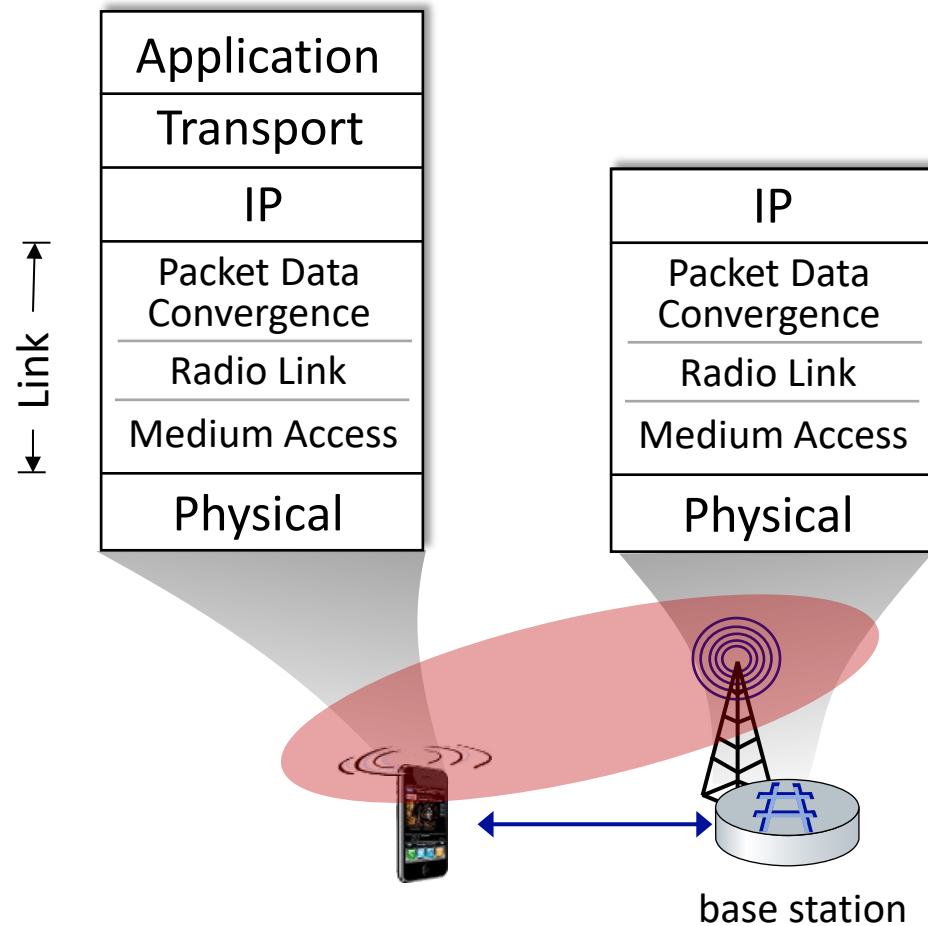

LTE radio access network:

- **downstream channel:** FDM, TDM within frequency channel (OFDM - orthogonal frequency division multiplexing)
 - “orthogonal”: minimal interference between channels
 - **upstream:** FDM, TDM similar to OFDM
- each active mobile device allocated two or more 0.5 ms time slots over 12 frequencies
 - scheduling algorithm not standardized – up to operator
 - 100's Mbps per device possible


LTE data plane protocol stack: packet core

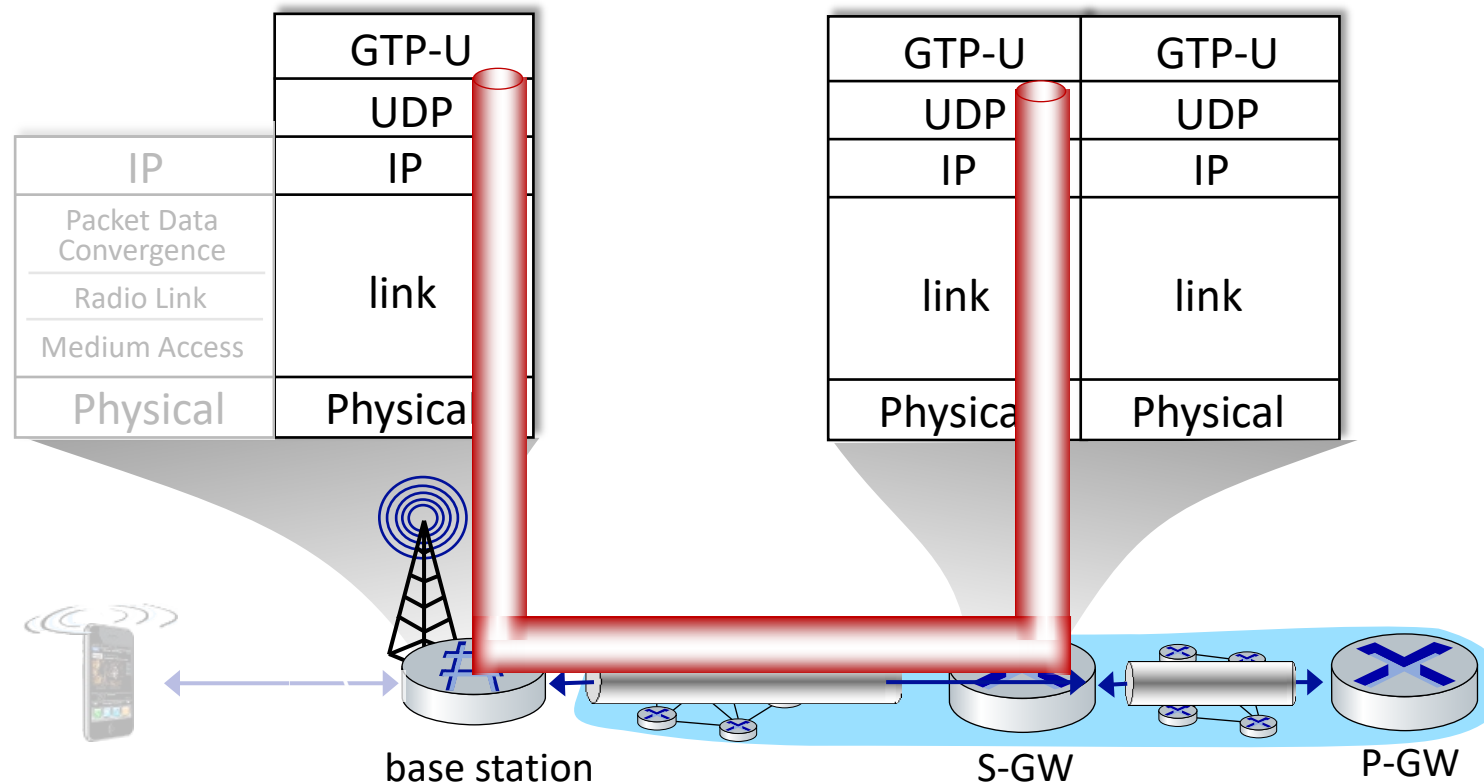

tunneling:


- mobile datagram encapsulated using GPRS Tunneling Protocol (GTP), sent inside UDP datagram to S-GW
- S-GW re-tunnels datagrams to P-GW
- supporting mobility: only tunneling endpoints change when mobile user moves

LTE data plane: associating with a BS

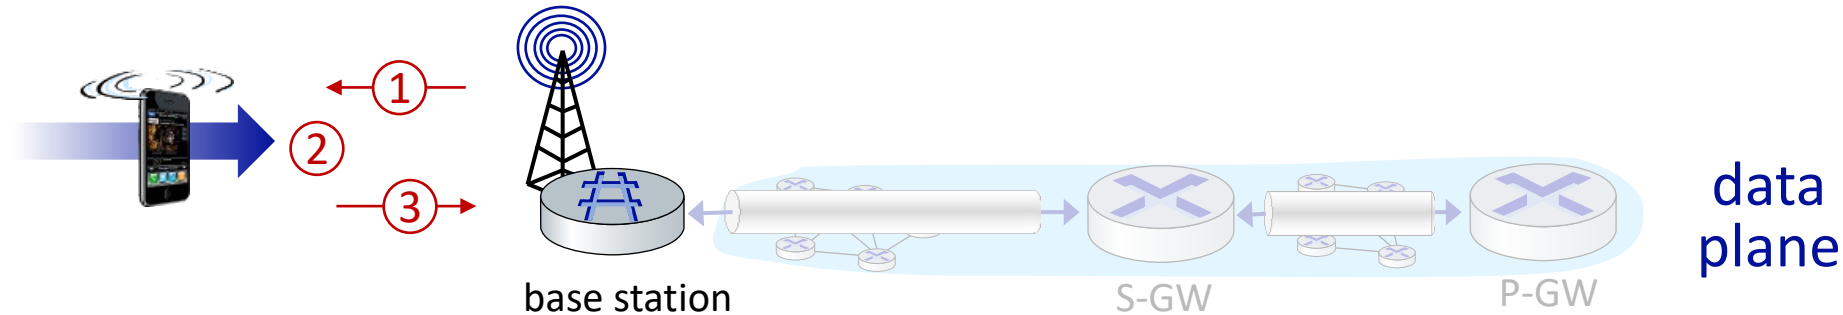

- ① BS broadcasts primary synch signal every 5 ms on all frequencies
 - BSs from multiple carriers may be broadcasting synch signals
- ② mobile finds a primary synch signal, then locates 2nd synch signal on this freq.
 - mobile then finds info broadcast by BS: channel bandwidth, configurations; BS's cellular carrier info
 - mobile may get info from multiple base stations, multiple cellular networks
- ③ mobile selects which BS to associate with (*e.g.*, preference for home carrier)
- ④ more steps still needed to authenticate, establish state, set up data plane


LTE mobiles: sleep modes

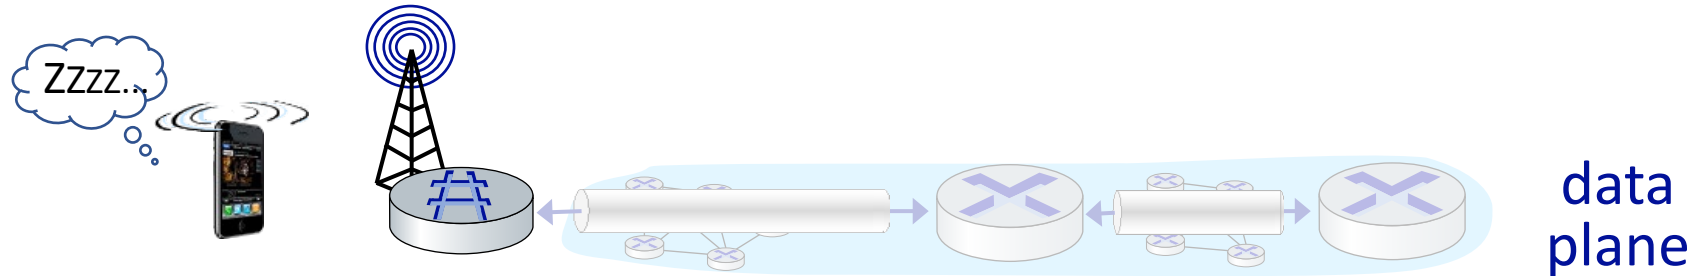

as in WiFi, Bluetooth: LTE mobile may put radio to “sleep” to conserve battery:

- **light sleep:** after 100’s msec of inactivity
 - wake up periodically (100’s msec) to check for downstream transmissions
- **deep sleep:** after 5-10 secs of inactivity
 - mobile may change cells while deep sleeping – need to re-establish association

Global cellular network: a network of IP networks

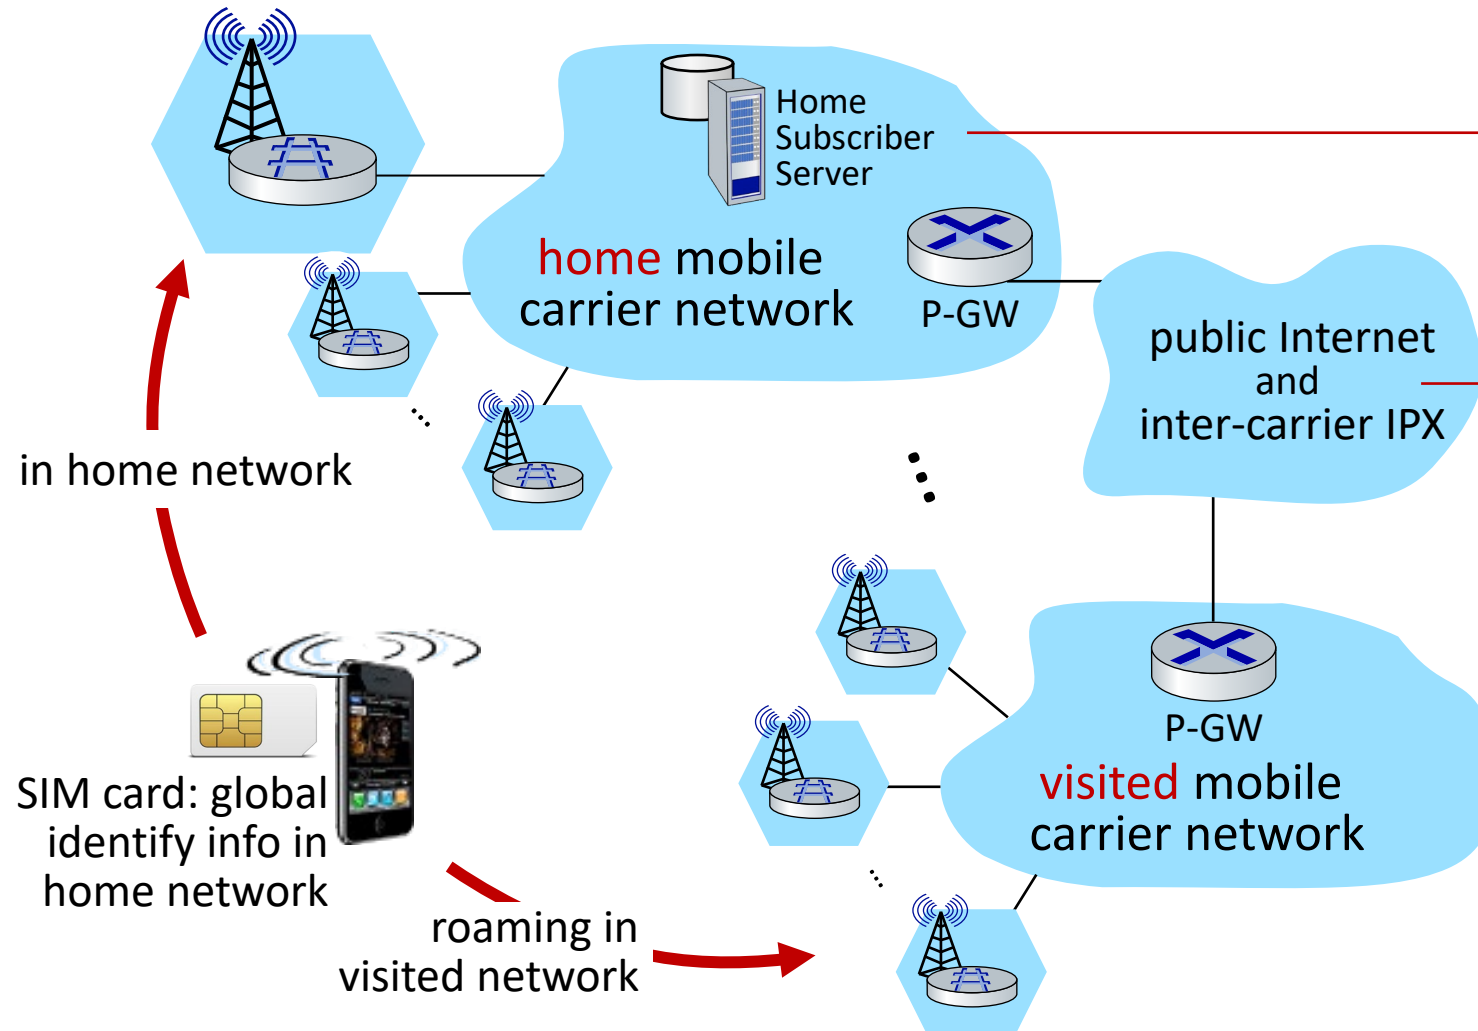

home network HSS:

- identify & services info, while in home network and roaming

all IP:

- carriers interconnect with each other, and public internet at exchange points
- legacy 2G, 3G: not all IP, handled otherwise

On to 5G!

- **goal:** 10x increase in peak bitrate, 10x decrease in latency, 100x increase in traffic capacity over 4G
- **5G NR (new radio):**
 - two frequency bands: FR1 (450 MHz–6 GHz) and FR2 (24 GHz–52 GHz): millimeter wave frequencies
 - not backwards-compatible with 4G
 - MIMO: multiple directional antennae
- **millimeter wave frequencies:** much higher data rates, but over shorter distances
 - pico-cells: cells diameters: 10-100 m
 - massive, dense deployment of new base stations required

Outline

- Introduction

Wireless

- Wireless links and network characteristics
- WiFi: 802.11 wireless LANs
- Cellular networks: 4G and 5G



Mobility

- Mobility management: principles
- Mobility: impact on higher-layer protocols

What is mobility?

- spectrum of mobility, from the **network** perspective:

no mobility

high mobility



device moves
between
networks, but
powers down
while moving

device moves
within same
access net in
one provider
network

device moves
among access
nets in
one provider
network

device moves
among multiple
provider networks,
while maintaining
ongoing
connections

We're interested in these!

Mobility approaches

- **let network (routers) handle it:**
 - routers advertise well-known name, address (e.g., permanent 32-bit IP address), or number (e.g., cell #) of visiting mobile node via usual routing table exchange
 - Internet routing could do this already *with no* changes! Routing tables indicate where each mobile located via longest prefix match!

Mobility approaches

- let network (routers) handle it:
 - routers advertise well-known address (e.g., permanent 32-bit IP address), or number of visiting mobile node via usual routing table exchange
 - Internet routing could do this *very easily with no changes!* Routing tables indicate where each mobile located via longest prefix match!
- **let end-systems handle it:** functionality at the “edge”
 - *indirect routing*: communication from correspondent to mobile goes through home network, then forwarded to remote mobile
 - *direct routing*: correspondent gets foreign address of mobile, send directly to mobile

not
scalable
to billions of
mobiles

Contacting a mobile friend:

Consider friend frequently changing locations, how do you find him/her?

- search all phone books?
- expect her to let you know where he/she is?


- call his/her parents?
- Facebook!

The importance of having a “home”:

- a definitive source of information about you
- a place where people can find out where you are



Home network, visited network: 4G/5G

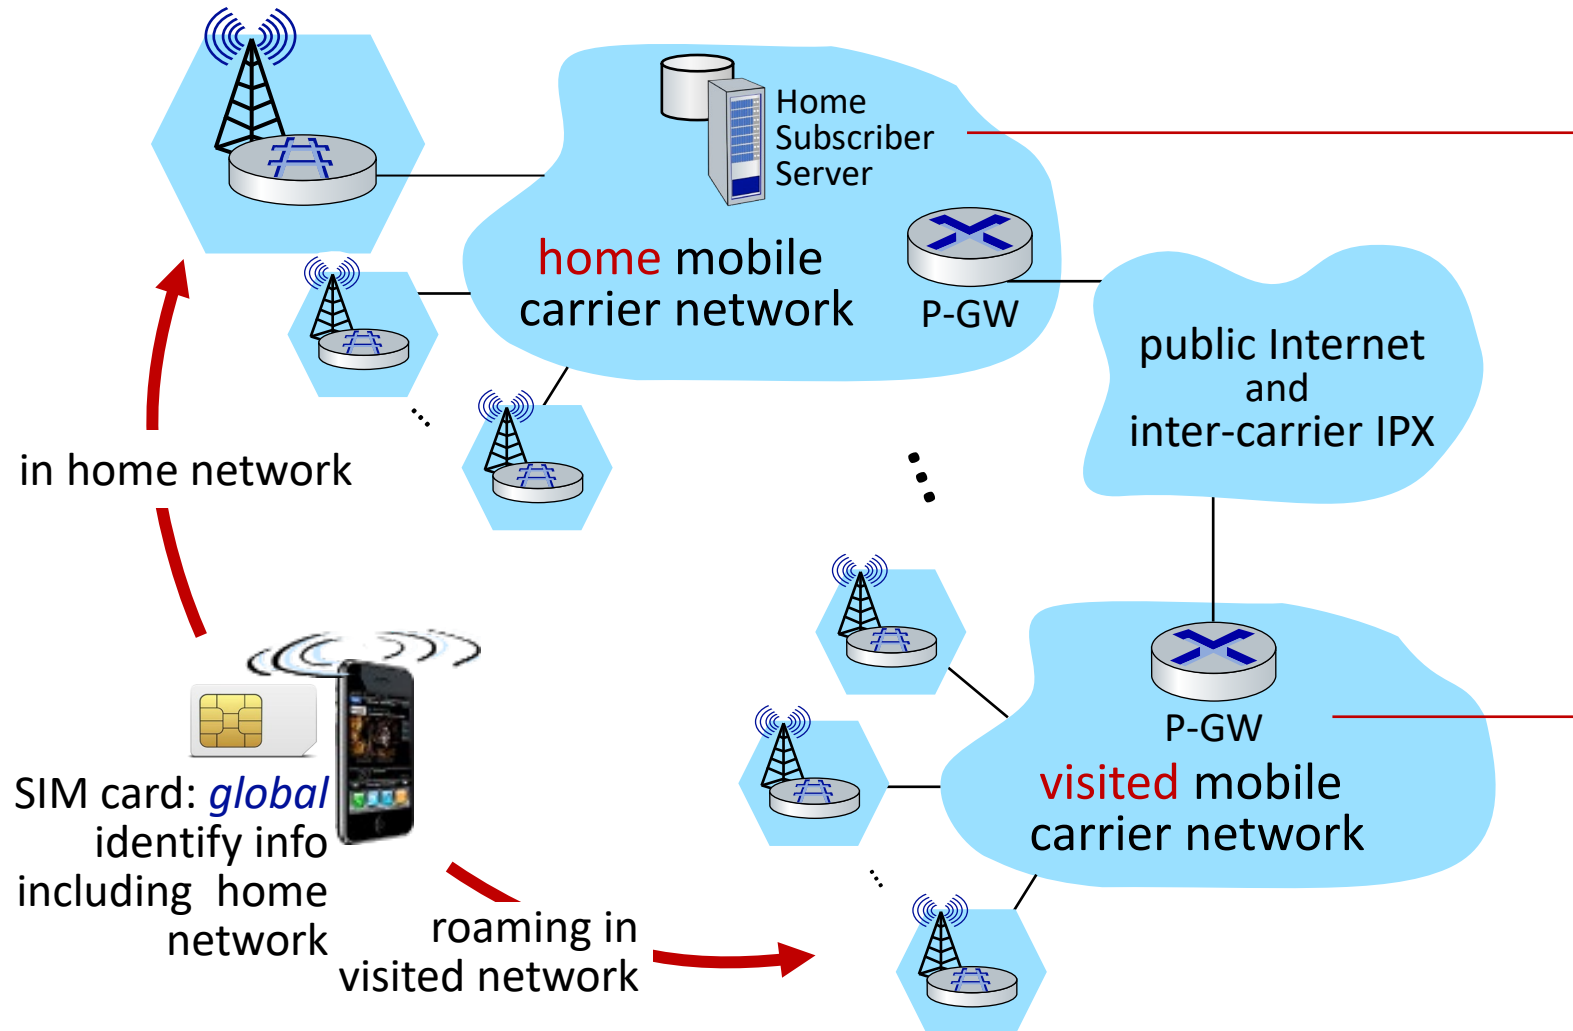


home network:

- (paid) service plan with cellular provider, e.g., Verizon, Orange
- home network HSS stores identify & services info

visited network:

- any network other than your home network
- service agreement with other networks: to provide access to visiting mobile

Home network, visited network: ISP/WiFi

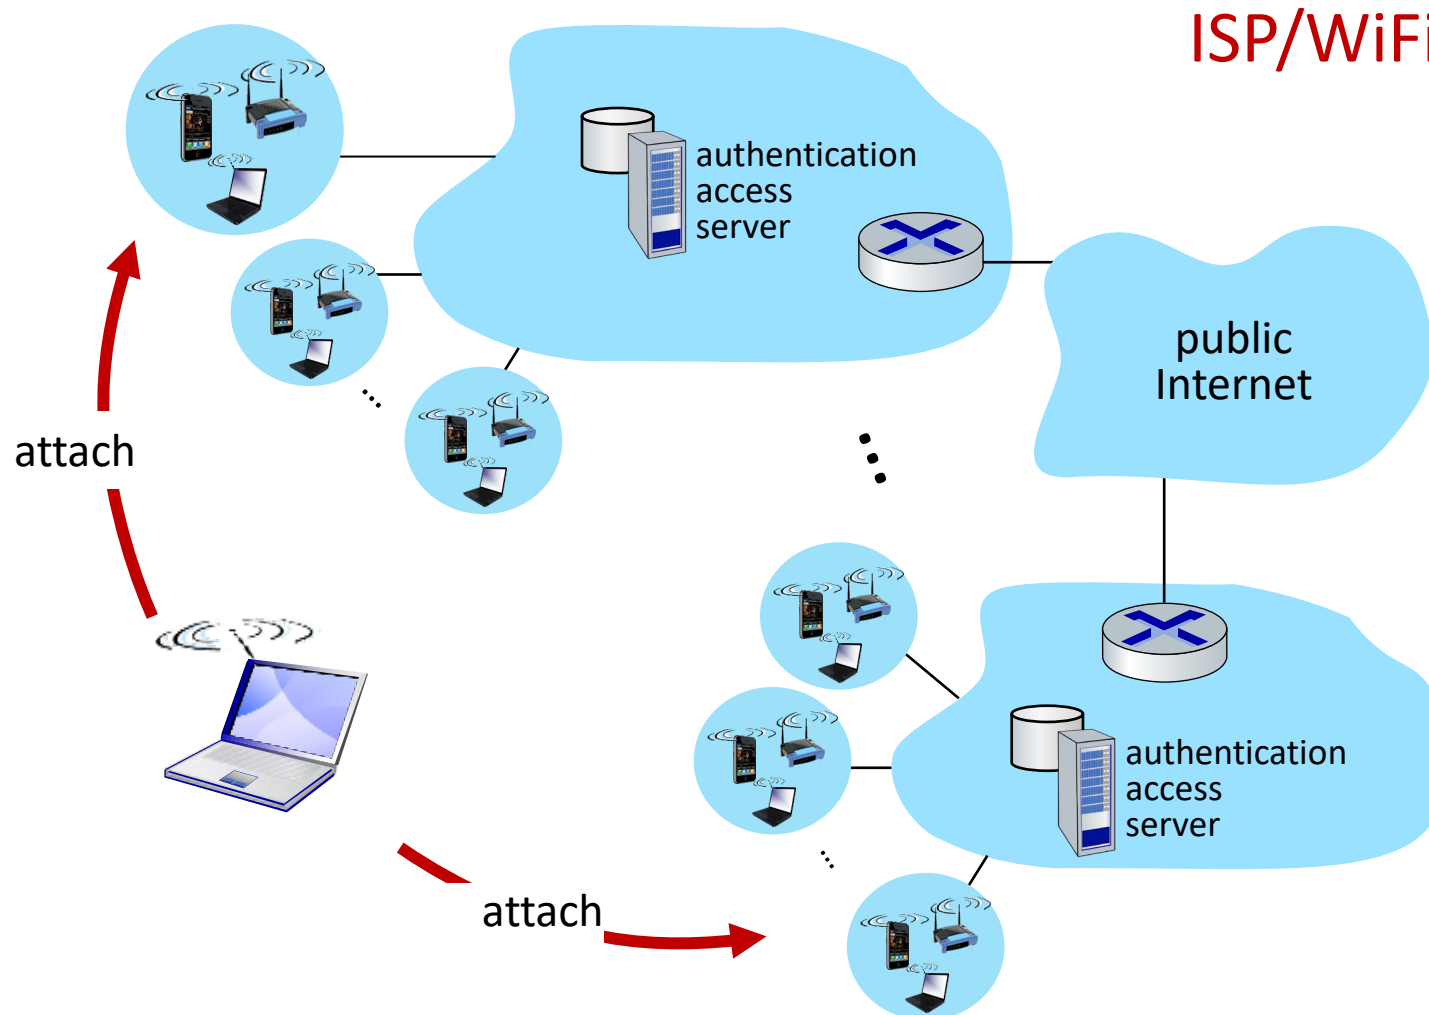


ISP/WiFi: no notion of global “home”

- credentials from ISP (e.g., username, password) stored on device or with user
- ISPs may have national, international presence
- different networks: different credentials
 - some exceptions (e.g., eduroam)
 - architectures exist (mobile IP) for 4G-like mobility, but not used

Home network, visited network: generic


Home Network

e.g.,: 128.119/16

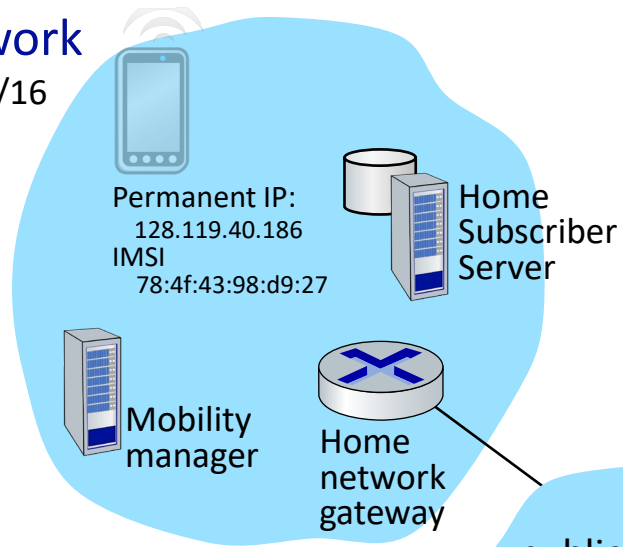

Visited Network

e.g.,: 79.129/16

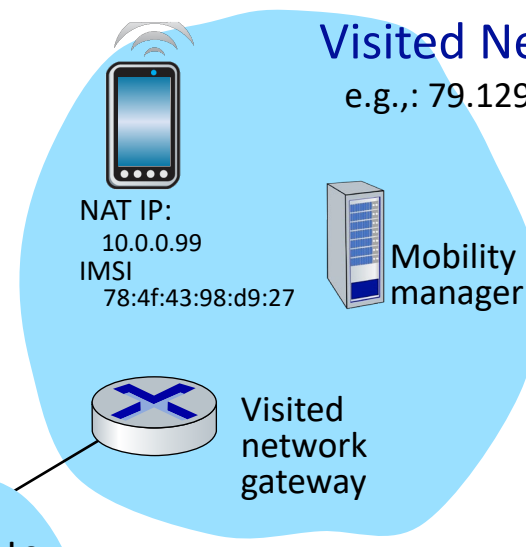


public or private
Internet



Correspondent


Registration: home needs to know where you are!

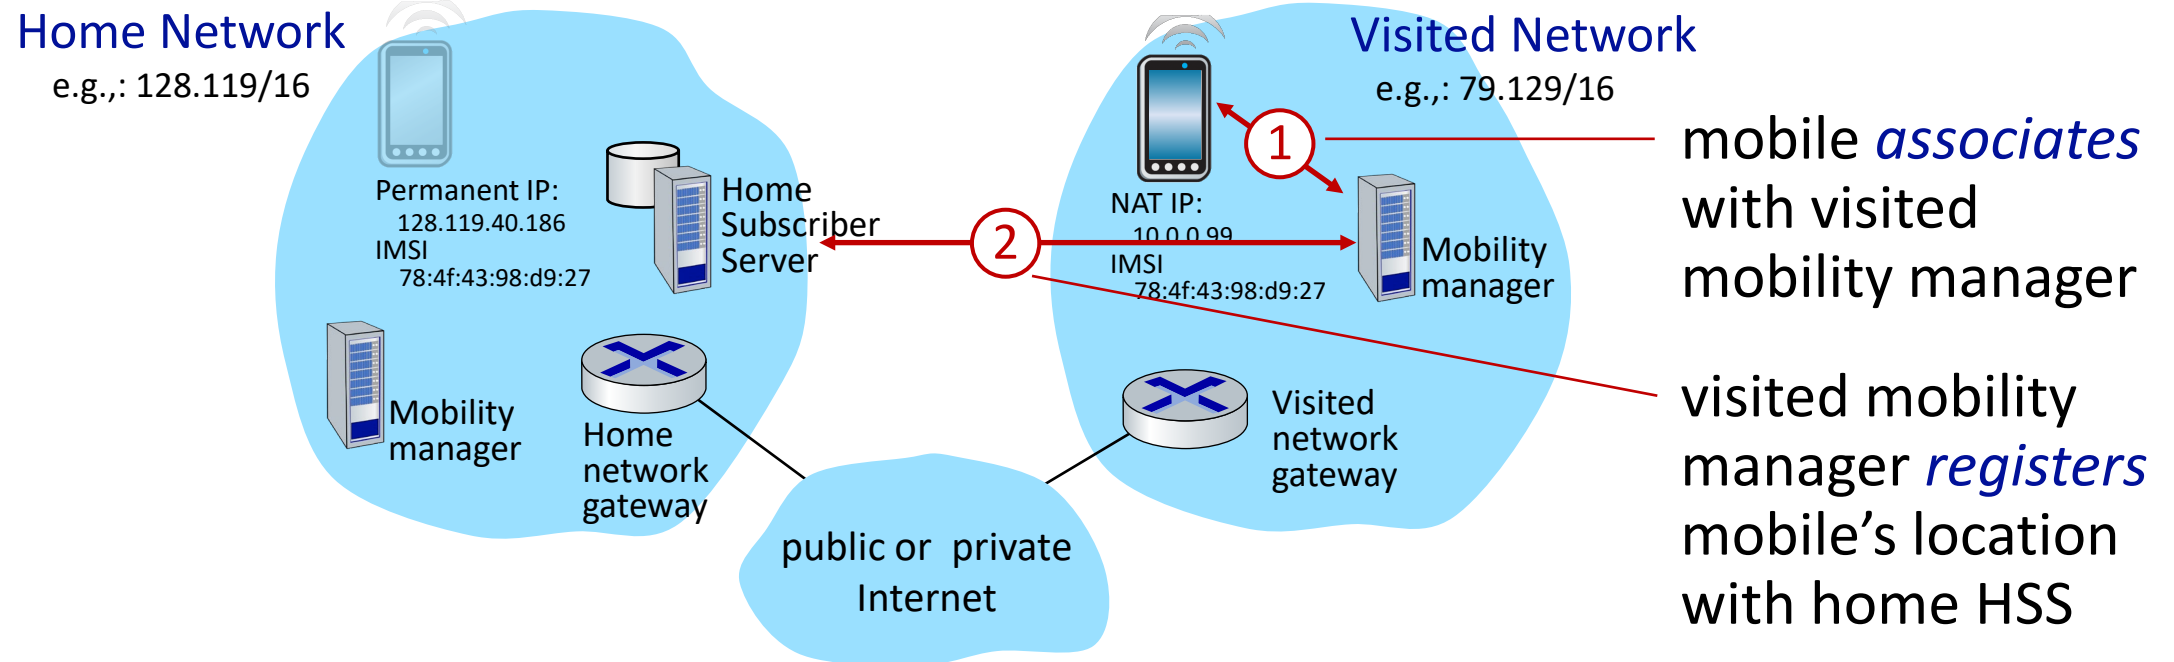

end result:


- visited mobility manager knows about mobile
- home HSS knows location of mobile

Mobility with indirect routing

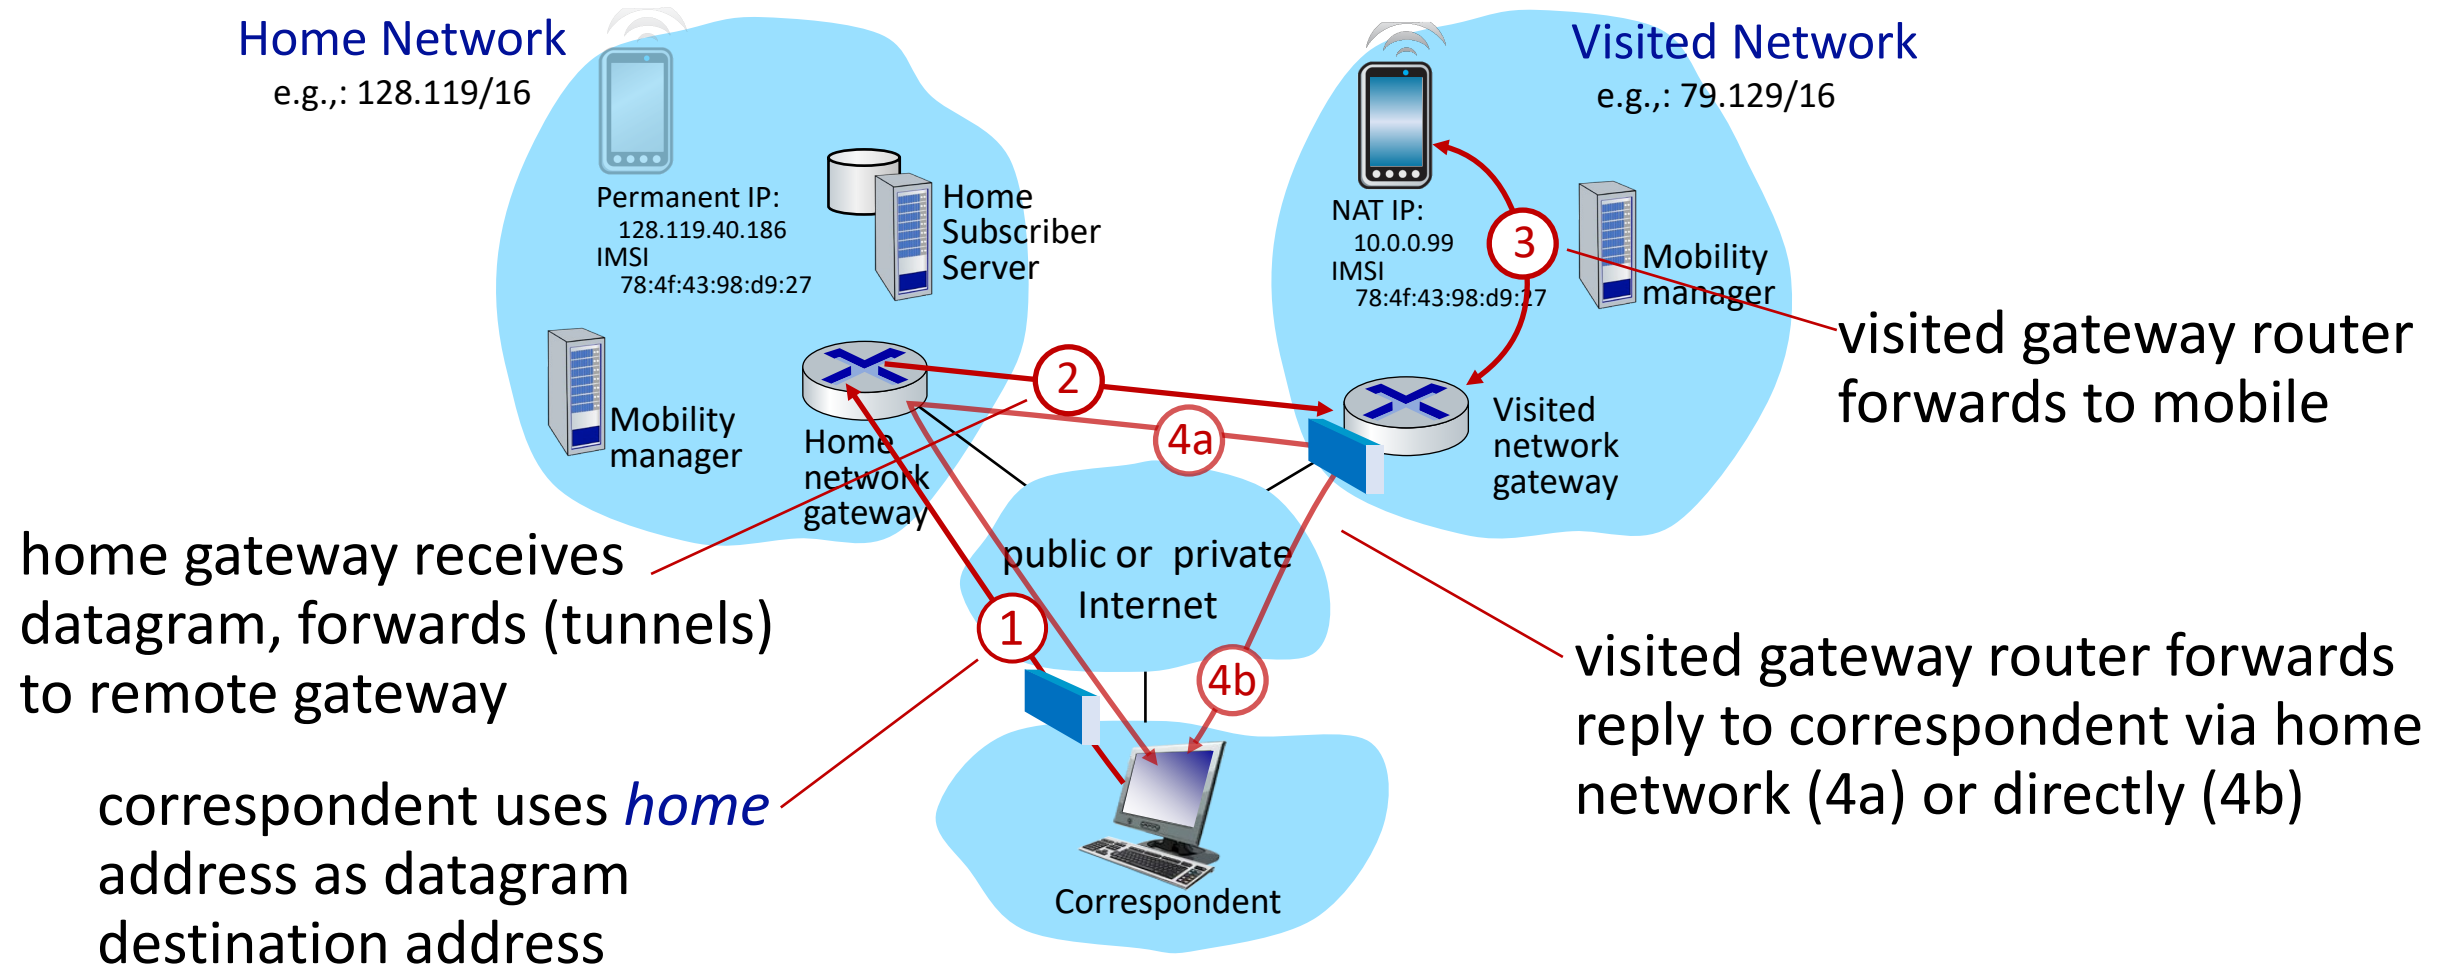


Mobility with indirect routing: comments

- triangle routing:
 - inefficient when correspondent and mobile are in same network
- mobile moves among visited networks: transparent to correspondent!
 - registers in new visited network
 - new visited network registers with home HSS
 - datagrams continue to be forwarded from home network to mobile in new network
 - *on-going (e.g., TCP) connections between correspondent and mobile can be maintained!*

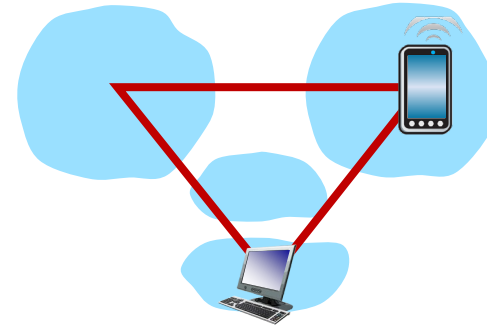

Mobility with direct routing

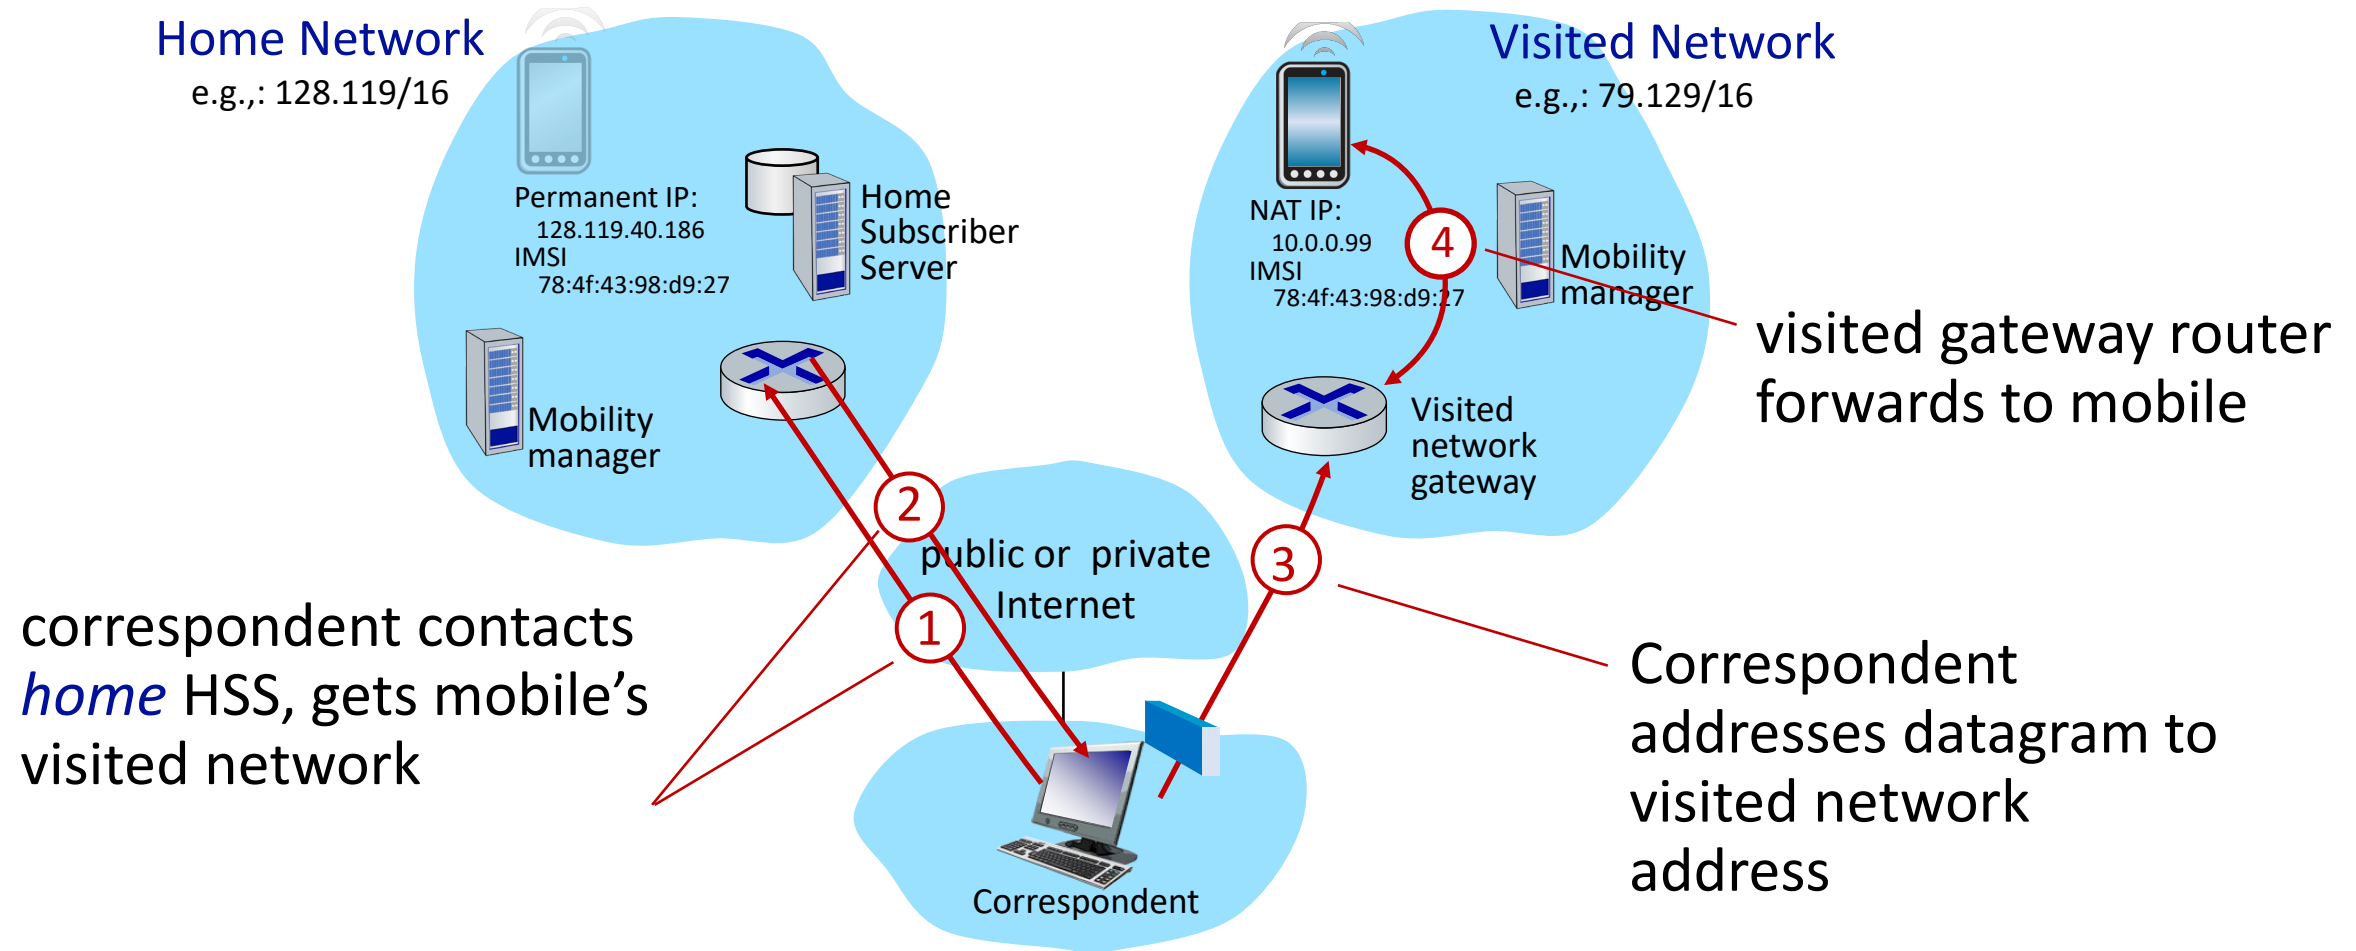

Mobility with direct routing: comments

- overcomes triangle routing inefficiencies
- *non-transparent to correspondent*: correspondent must get care-of-address from home agent
- what if mobile changes visited network?
 - can be handled, but with additional complexity

Outline

- Introduction

Wireless

- Wireless links and network characteristics
- WiFi: 802.11 wireless LANs
- Cellular networks: 4G and 5G



Mobility

- Mobility management: principles
- Mobility: impact on higher-layer protocols

Wireless, mobility: impact on higher layer protocols

- logically, impact *should* be minimal ...
 - best effort service model remains unchanged
 - TCP and UDP can (and do) run over wireless, mobile
- ... but performance-wise:
 - packet loss/delay due to bit-errors (discarded packets, delays for link-layer retransmissions), and handover loss
 - TCP interprets loss as congestion, will decrease congestion window unnecessarily
 - delay impairments for real-time traffic
 - bandwidth a scarce resource for wireless links

Summary

Wireless

- Wireless Links and network characteristics
- WiFi: 802.11 wireless LANs
- Bluetooth: 802.15.1 wireless PANs
- Cellular networks: 4G and 5G

Mobility

- Mobility management: principles
- Mobility: impact on higher-layer protocols

