Energy and Power

Energy Harvesting, Solar Cell Characteristics and Maximum Power Point Tracking, Application Control

Exercise class 8

Presenter:
Jürgen Mattheis

In cooperation with: Pascal Walter Based on the lecture of: Marco Zimmerling

January 16, 2023

University of Freiburg, Chair for Embedded Systems

Gliederung

Organisation

Task 1

Task 2

Task 3

Organisation



Organisation I

► feedback for me: https://forms.gle/f3YN8EFrZ1vsfPoC6

	Questions Responses 0 5	ettings
l response		a :
		Accepting responses
Summary	Question	Individual
s there something that could b	e improved?	
and the recording.	which are asked during the session	would be repeated for the live stream



Task 1 I

Task 1.1:

=Z

Task	τ_1	τ_2	τ_3
Arrival Time [ms]	0	0	0
Period [ms]	6	4	12
Relative Deadline [ms]	6	4	12
Cycles [$\times 10^3$]	2	1	2

$$P_{\mathsf{dynamic}}(f) = \left(\frac{f}{\mathsf{1\,MHz}}\right)^{3}\mathsf{mW}$$

Task 1 II

Solution 1.1:




$$C_2 = rac{1 \cdot 10^3 \, \text{Cyles}}{1 \cdot 10^6 \, rac{\text{Cycles}}{\text{c}}} = 1 \, \text{ms}$$
, and $C_3 = rac{1 \cdot 10^3 \, \text{Cyles}}{1 \cdot 10^6 \, rac{\text{Cycles}}{\text{c}}} = 2 \, \text{ms}$ ($T = rac{N}{f}$).


- ► Applying EDF schedule, the processor is busy in [0ms, 9ms]
- ightharpoonup constant input power: $P_{in}=0.5\mu J$
- We use 1MHz for processing tasks, leading to $P_{dynamic}(1MHz) = 1mW$
- ► This means we consume $1mW \cdot 1ms = 1\mu J$ per milisecond.
- Since all our tasks take a multiple of 1ms, we know that while processing tasks, our battery empties with $1\mu J/ms 1\mu J/ms = -0.5\mu J/ms$



Task 1 III

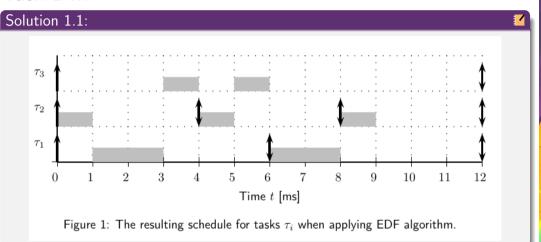

Task 1 IV

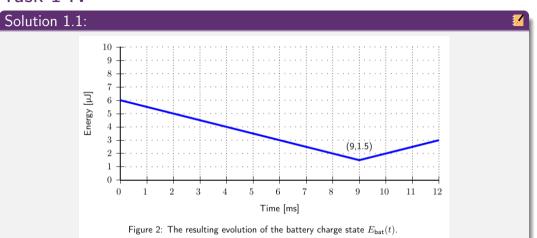

Jürgen Mattheis Energy and Power University of Freiburg

Task 1 V

Task 1.2:



10/35

To maximize the energy stored in the battery at the end of each hyper-period (12ms), all tasks τ_i have to be executed at the same frequency and this frequency leads to a utilization of 1.0

Task 1 VI

Requirements 1.2:




- ▶ processor utilization $U_p = \sum_{i=1}^n \frac{C_i}{T_i}$
- by the given power consumption $P_{dynamic}(f)$ is a strictly convex function of the frequency f
- The EDF scheduling algorithm where deadlines of tasks equal their periods guarantees a feasible schedule as long as the utilization of the processor is U < 1.0
 - this schedulability test is necessary and sufficient, i.e. if one reaches a utilization of exactly U = 1.0, then it has to be schedulable

Task 1 VII

Requirements 1.2:



12/35



► The same argument applies if the power is a convex function of the frequency!

Task 1 VIII

Solution 1.2:



- The execution of all tasks with a constant frequency allows for a schedule where the utilization satisfies U = 1.0, i.e., the processor is constantly busy
 - ightharpoonup determine right frequency by looking at schedule: $\frac{9}{12} = 0.75$
 - determine right frequency by calculation:

$$1 = \frac{\frac{2kCycles}{f}}{\frac{6ms}{6ms}} + \frac{\frac{1kCycles}{4ms}}{\frac{4ms}{4ms}} + \frac{\frac{2kCycles}{f}}{\frac{12ms}{2ms}} = \frac{\frac{4kCycles+3kCycles+2kCycles}{f}}{12ms} \Leftrightarrow f = \frac{9 \cdot 10^3 \, Cycles}{12 \cdot 10^{-3} \, s} = 0.75 \cdot 10^{3+3} \cdot \frac{1}{s} = 0.75 \, MHz$$

▶ the optimality of processing at a constant frequency during the whole time follows the same argumentation used to derive the optimal Dynamic Voltage and Frequency Scaling (DVFS).

Task 1 IX

Solution 1.2:



- Due to the strict convexity of the power consumption $P_{dynamic}(f)$ the increase in the average power consumption of the higher frequency task always dominates the savings in the average power consumption of the lower frequency task execution.
- ▶ the above conditions (constant frequency during execution, processor executing all the time) lead to a schedule, where the maximum frequency of task execution can not be further reduced as the whole time interval where tasks can be executed is filled with execution and all tasks are executed with the same frequency.



Jürgen Mattheis Energy and Power University of Freiburg

Task 2 I

Power Point Tracking Algorithm

Requirements 2.1:



16/35

 $I(U) = G \cdot 1 \text{ A} - \left(\exp\left(\frac{U}{0.1 \text{ V}}\right) - 1\right) \cdot 0.01 \text{ mA}$

$$P = I \cdot U$$

Task 2 II

Power Point Tracking Algorithm

plution 2.1:				
$ \ \textbf{Relative Irradiance} G$	0.1	0.2	0.5	1.0
Voltage V [V]	0.7	0.7	0.7	0.7
Current I [mA]	89.0	189.0	489.0	989.0
Power P [mW]	62.3	132.3	342.3	692.3

Task 2 I

Task 2.2:




- for G = 0.1 and G = 1.0
- $\triangle = 0.05 V$
- iteration k = 1, V[0] = 0.7V and V[1] = 0.75V

Task 2 II


Requirements 2.2:



- $I(U) = G \cdot 1 \text{ A} \left(\exp \left(\frac{U}{0.1 \text{ V}} \right) 1 \right) \cdot 0.01 \text{ mA}$
- $\triangleright P = I \cdot U$



Task 2 III

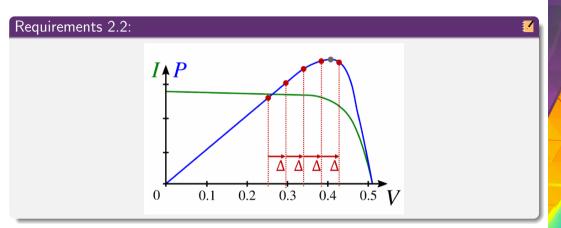

Jürgen Mattheis Energy and Power University of Freiburg


Task 2 IV

Requirements 2.2:




- $P(V) = V \cdot I(V) = V \cdot G V \cdot \left(\exp\left(\frac{V}{0.1 \text{ V}}\right) 1 \right) \cdot 10^{-5}$
- the power P extracted at a given operating point V, calculated as is a concave function of that V
- As the algorithm adjusts the operating point in discrete voltage steps \triangle , the maximum of the power P[k] observed by the algorithm presents a lower bound of the actual maximum power point P^* .
 - Only in the special case where the voltage of the maximum power point is a multiple of \triangle , it is matched exactly by the algorithm.

Task 2 V

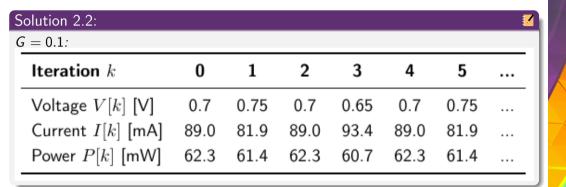


Task 2 VI

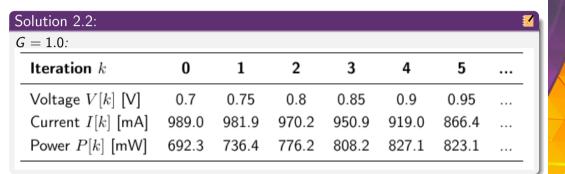


Jürgen Mattheis Energy and Power University of Freiburg

Task 2 VII

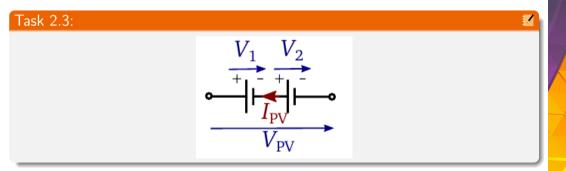

Jürgen Mattheis Energy and Power University of Freiburg

Task 2 VIII

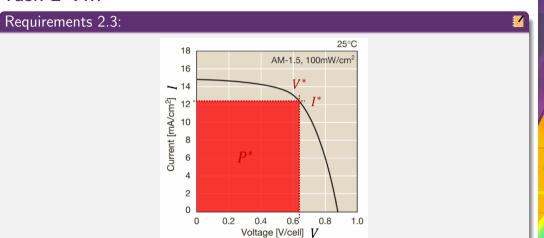

Jürgen Mattheis Energy and Power University of Freiburg

Task 2 IX

Solution 2.3:



- ind the voltage V_1^* of the maximum power point P_1^* by numerically solving: $\frac{d}{dU_1}P_1(U_1) = \frac{d}{dU_1}U_1 \cdot I_1(U_1) = 0$
- ▶ cell 1 with G = 1.0: voltage at the maximum power point: $U_1^* \approx 0.919 \text{ V}$ and the maximum power generated: $P_1^* = U_1^* \cdot I_1(U_1^*) \approx 829 \text{ mW}$
- ► cell 2 with G = 0.1: $U_2^* = 0.712V$ and $P_2^* = 62.4mW$
- we determine an upper bound, i.e., a value which is larger than what can be generated by the partly shaded photovoltaic panel
- ightharpoonup conditions: $U_{PV}=U_1+U_2$ and $I_{PV}=I_1=I_2$

Task 2 X

Solution 2.3:



$$G_1 - \left(\exp\left(\frac{U_1}{0.1}\right) - 1\right) \cdot 10^{-5} = G_2 - \left(\exp\left(\frac{U_2}{0.1}\right) - 1\right) \cdot 10^{-5}$$

$$\Leftrightarrow (G_1 - G_2) \cdot 10^5 = \exp\left(\frac{U_1}{0.1}\right) - \exp\left(\frac{U_2}{0.1}\right)$$

$$\Leftrightarrow \exp\left(rac{U_1}{0.1}
ight) = (G_1 - G_2) \cdot 10^5 + \exp\left(rac{U_2}{0.1}
ight)$$

- Note that an increase in U_2 leads to an increasing U_1 ! First we assume $U_2 = 0$:
- $V_1 = 0.1 \cdot \log ((G_1 G_2) \cdot 10^5 + \exp(0)) \approx 1.14 \text{ V}$
- $P_{PV} = I_{PV} \cdot (U_1 + U_2) \approx 114.1 \text{ mW} = 0.1A \cdot (1.14V + 0V) \approx 0.1141 \text{ W} = 114.1 \text{ mW}$

Task 2 XI

Solution 2.3:



- ▶ The voltage $U_1 \approx 1.14V$ at this operating point is already above $U_1^* \approx 0.919V$ the maximum power point of cell 1. Therefore, an increase in U_1 (and U_2) results in a decrease in the output power for cell 1.
- ▶ safe upper bound: $P_{PV}^* \le 176.5 \text{ mW} = 114.1 \text{ mW} + 62.4 \text{ mW}$
- We note that this is significantly lower than $P_1^* \approx 829.0$ mW that can be generated with a single cell 1 at the same operating point. In addition, it is only slightly better than a situation, where both cells receive the low irradiance, namely $125 \, \mathrm{mW}$



Jürgen Mattheis Energy and Power University of Freiburg

Application control


Task 3.1:



30 / 35

Consider the energy harvesting profile p(t) given in Figure 4 that repeats daily. What is the maximum average power u_{max} that can be used by the system?

Application control

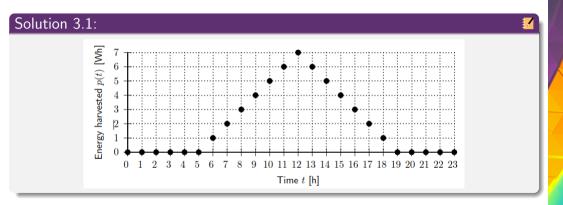

Jürgen Mattheis Energy and Power University of Freiburg

Application control

Solution 3.1:



- The daily harvested energy is calculated by: (1Wh + 2Wh + 3Wh + 4Wh + 5H + 6Wh) * 2 + 7Wh = 49Wh
- This results in the following maximum average harvesting power: $u_{max} = \frac{49Wh}{24h} = 2.04W$

Application control

Task 3.2:

B

33 / 35

Given the knowledge of the daily energy input profile p(t) in Figure 5, calculate the minimal battery size B_{min} such that the used energy satisfies u(t)=2 for every time interval during a day. Complete the diagram in Figure 6 with the daily evolution of the used energy u(t) and the battery charge state b(t) at the beginning of the interval for the found battery size B_{min} .


Application control

Solution 3.2:



- The energy used during night, where the harvested energy is lower than the consumed energy, is: $1Wh + 11 \cdot 2Wh + 1Wh = 24Wh$
- We need at least this much energy in our battery to compensate this deficit, meaning $B > 24Wh \Rightarrow B_{min} = 24Wh$.

Application control



Jürgen Mattheis Energy and Power University of Freiburg